Disclaimer:

Due to continuous technological updates, materials and technical specifications are subject to change without notice. The actual product supply status shall be subject to the sales contract. Samples are for reference only.

Elephant Machinery CO.,LTD.

No. 58, Guanhua West Road, Jianhu County, Yancheng City, Jiangsu Province 0515-80603039


Room 909, Building 4, Yuhua Living Room, No. 109, Software Avenue, Yuhuatai District, Nanjing City, Jiangsu Province 025-52891797



WeChat Official A

www.c-emc.com



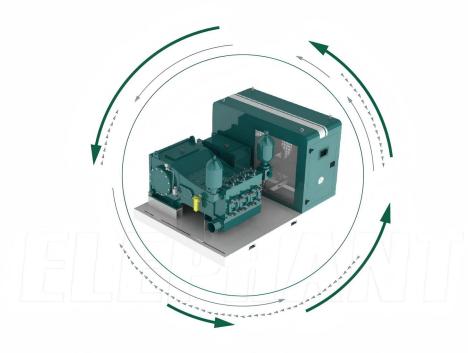


Reciprocating Pumps

Mud Pump Series


Convenient · Reliable · Efficient · Intelligent

Contents

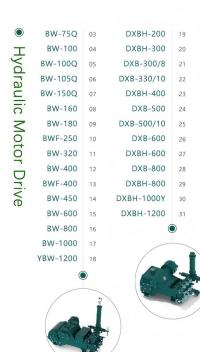

DBW-100 32 DBW-100Q ectric DBW-160 34 DXBH-200E 35 DBW-250 36 DBWF-250 37 lotor DXBH-300EQ 38 DBW-320 39 Drive DXBH-400E 40 DBW-600 41 DXBH-600E 42 DBW-800 DXBH-800E 44 DBW-850/5S 45 DBWH-1500 46

DBWH-3000 47



CBW-100Q 48

CBW-105Q 49

CBW-150Q 50

■ Company Profile

Elephant Machinery Co., Ltd. was established in 2008 and covers an area of 30,000 square meters. It is a comprehensive enterprise integrating the research, development, manufacturing, sales, and service of reciprocating pumps across all application fields. The company holds multiple invention patents and has obtained certifications including the API Spec Q1 Quality Management System, ISO 9001 Quality Management System, ISO 14001 Environmental Management System, ISO 45001 Occupational Health and Safety Management System, ISO 10012 Measurement Management System, ISO 50001 Energy Management System, Enterprise Intellectual Property Management System, Enterprise Integrity Management System, Product After-Sales Service Evaluation System, Green Factory, Five-Star Green Supply Chain Rating, AAA-Level Enterprise Credit Rating, and EU CE certification. It has been recognized as a National High-Tech Enterprise, Jiangsu Province Specialized, Refined, and Innovative Enterprise, and Smart Factory.

Elephant Machinery specializes in reciprocating plunger pumps and piston pump products. These products are designed in accordance with national standards such as GB/T9234-2018, as well as international standards like API Spec Q1, AP1674 Third Edition and ISO13710:2004, capable of meeting flow and pressure requirements across various application fields, including oilfield water injection pumps, polymer injection pumps, booster pumps, pressure testing pumps, cementing pumps, coal mine spray pumps, hydraulic fracturing pumps, emulsion pumps, trenchless construction, geological exploration mud pumps, grouting pumps, and ultra-high-pressure water jet cleaning pumps. These products are widely used in oilfield water injection, polymer injection, pressure boosting, pressure testing, cementing, trenchless construction, mining, geological exploration, deep well drilling, geothermal cobalt exploration, coal mine hydraulic fracturing, tunnel support, hole sealing grouting, tunnel drilling, and ultra-high-pressure water jet cleaning, among other related fields. We are committed to providing customers across various industries with convenient, reliable, efficient, and intelligent reciprocating pump products and comprehensive solutions.





BW-75Q (Hydraulic Motor Driven)




The BW-75Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a hydraulic motor. It is mainly used for portable rock core drilling machines and can also be used for other applications such as grouting, mine drainage, and long-distance water transportation. The pump can adjust speeds infinitely with the hydraulic motor, making it suitable for drilling and backwashing of different diameters. In its design, new concepts, structures, materials, and processes have been used, resulting in a compact structure, light weight, small volume, and attractive appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are highly serialized and standardized, making installation and maintenance more convenient. The pump has a long service life for wearing parts and high reliability.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	40			
Cylinder diameter (mm)	50			
Flow (L/min)	75			
Pressure (MPa)	6			
Input speed (r/min)	320			
Input power (KW)	9			
Dimensions (mm)	$461 \times 517 \times 254$			
Weight (kg)	72			
Hydraulic motor model	2K604-0043			
Hydraulic motor pressure (MPa)	17			
Maximum motor flow (L/min)	45			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




BW-75Q Outline Dimension Drawing

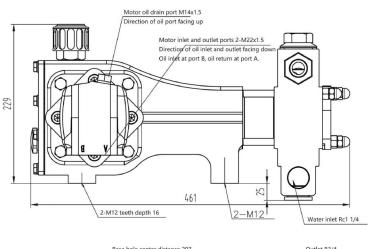

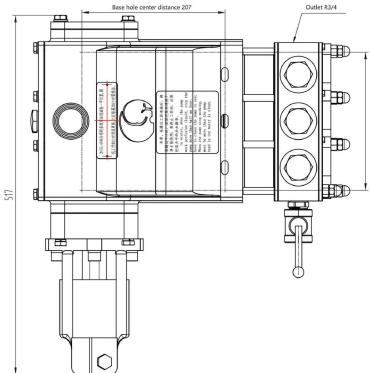



BW-100 (Hydraulic Motor Driven)

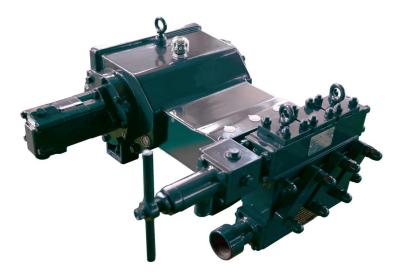


The BW-100 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines of around 10 tons, and can also be used for grouting, mine drainage, long-distance water delivery, and other purposes. The pump can achieve stepless speed regulation through the hydraulic motor, and is suitable for drilling and backhaul with different bore diameters. The design concept features new structures, materials, and processes, resulting in a compact structure, light weight, small size, and attractive appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are standardized and universal, which facilitates installation and maintenance. The service life of vulnerable components is long, and the reliability is high.


Horizontal triplex reciprocating single acting piston pump					
Stroke (mm)	60				
Cylinder diameter (mm)	55				
Flow (L/min)	100				
Pressure (MPa)	7				
Input speed (r/min)	240				
Input power (KW)	14				
Dimensions (mm)	690 × 641 × 350				
Weight (kg)	175				
Hydraulic motor model	2K604-0046				
Hydraulic motor pressure (MPa)	17				
Maximum motor flow (L/min)	65				

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BW-100 Outline Dimension Drawing

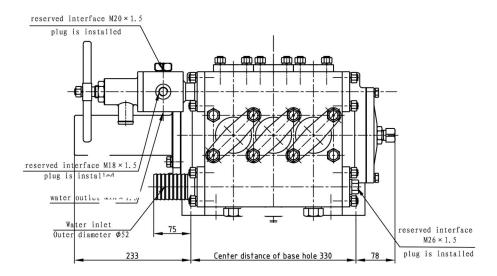

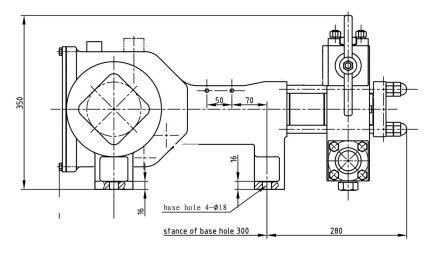



BW-100Q (Hydraulic Motor Driven)




The BW-100Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump that is hydraulically driven. It is mainly used in conjunction with non-excavation drilling machines of about 10 tons, but can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump can be adapted to different drill hole diameters and backhaul by continuously variable speed through the hydraulic motor. The design incorporates new concepts, new structures, new materials, and new processes. The pump has a compact structure, light weight, small size, and a beautiful appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are as much as possible standardized and universal, making installation and maintenance convenient. The life of vulnerable parts is long and the reliability is high.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	48			
Cylinder diameter (mm)	55			
Flow (L/min)	100			
Pressure (MPa)	7			
Input speed (r/min)	295			
Input power(KW)	13			
Dimensions (mm)	$545 \times 532 \times 285$			
Weight (kg)	90			
Hydraulic motor model	2K604-0045			
Hydraulic motor pressure (MPa)	17			
Maximum motor flow (L/min)	58			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BW-100Q Outline Dimension Drawing

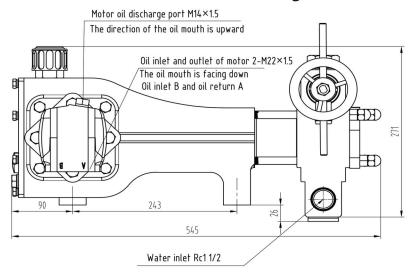

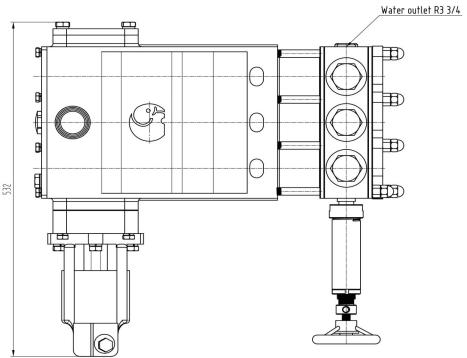



BW-105Q




The BW-105Q reciprocating pump is a horizontal triplex single-acting piston pump driven by a hydraulic motor. It is primarily designed for use with 12-ton trenchless drilling rigs but can also be employed for grouting, mine drainage, long-distance water delivery, geological exploration, and other applications. Featuring stepless speed regulation via the hydraulic motor, this pump adapts to drilling and pullback operations with varying borehole diameters. Its design incorporates innovative concepts, utilizing new structures, materials, and manufacturing techniques. The pump boasts a compact structure, lightweight construction, small footprint, and aesthetically pleasing appearance. Key components such as the pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are highly standardized and interchangeable, ensuring easy installation and maintenance. Additionally, it offers extended service life for wear-prone components and high operational reliability.

Horizontal triplex reciprocating single acting piston pump						
Stroke(mm)	60					
Cylinder diameter(mm)	50					
Pump speed(r/min)	300					
Flow(L/min)	105					
Pressure(Mpa)	10					
Input power(Kw)	20.2					
Dimensions(mm)	745 × 682 × 377					
Weight(kg)	175					
Motor model	1–250					
Hydraulic motor pressure(Mpa)	20					
Maximum motor flow(L/min)	80					

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BW-105Q Outline Dimension Drawing

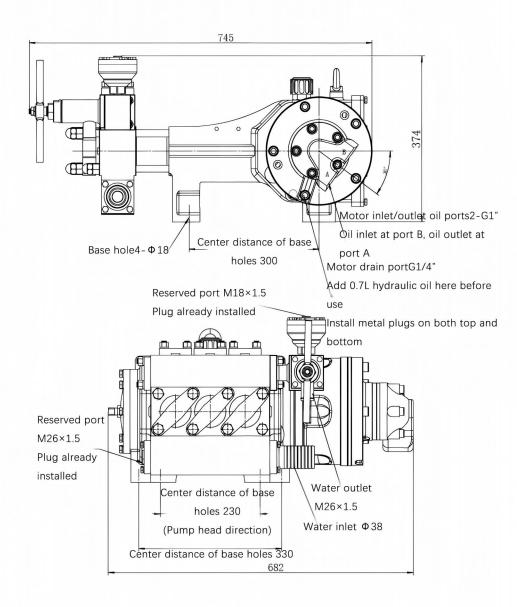



BW-150Q (Hydraulic Motor Driven)




The BW-150Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a hydraulic motor. It is mainly used with non-excavation drilling rigs of around 12 tons, and can also be used for other purposes such as injection, mine drainage, long-distance water transfer, and geological exploration. The pump can be infinitely adjusted with a hydraulic motor to adapt to different drilling diameters and backfilling. The design adopts new concepts, new structures, new materials, and new processes, with compact structure, light weight, small size, and beautiful appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are as standardized and universal as possible for easy installation and maintenance. The service life of vulnerable parts is long and the reliability is high.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	60			
Cylinder diameter (mm)	60			
Flow (L/min)	150			
Pressure (MPa)	7			
Input speed (r/min)	295			
Input power (KW)	21			
Dimensions (mm)	702 × 682 × 374			
Weight (kg)	200			
Hydraulic motor model	1-250			
Hydraulic motor pressure (MPa)	20			
Maximum motor flow(L/min)	75			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BW-150Q Outline Dimension Drawing

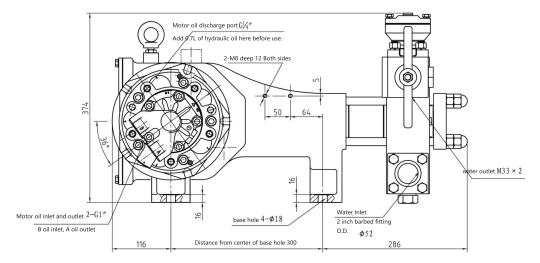

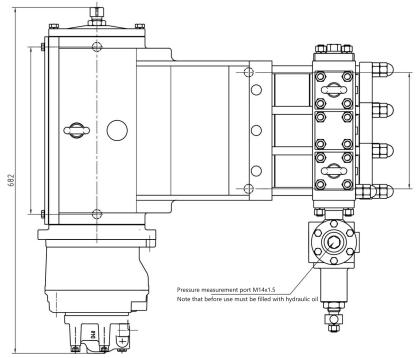



BW-160 (Hydraulic Motor Driven)




The BW-160 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump that is driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of around 15 tons, but can also be used for other purposes such as grouting, mine wastewater discharge, and long-distance water conveyance. The pump has four flow rates and four pressures, with a wide range of flow and pressure changes that can be applied to different drill hole diameters. In terms of design, new concepts, new structures, new materials, and new processes are used. The pump is compact, lightweight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are designed to be standardized and universal, making installation and maintenance convenient. The service life of vulnerable parts is long, and the reliability is high.


Horizontal triplex reciprocating single acting piston pump					
Stroke (mm)	70				
Cylinder diameter (mm)	70				
Flow (L/min)	160 107 67 44				
Pressure (MPa)	2.7 4 6.5 10				
Input speed (r/min)	540				
Input power (KW)	9				
Dimensions (mm)	785 × 788 × 708				
Weight (kg)	290				
Hydraulic motor model	2K604-0041				
Hydraulic motor pressure (MPa)	17				
Maximum motor flow (L/min)	48				

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




BW-160 Outline Dimension Drawing



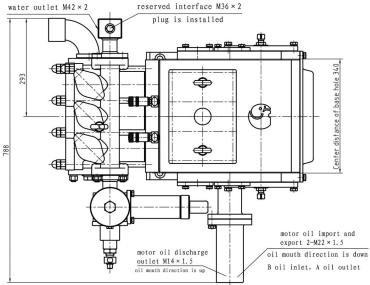



BW-180 (Hydraulic Motor Driven)




The BW-180 reciprocating pump is a horizontal, triplex, reciprocating, single-acting piston pump that is driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines weighing around 18 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has two flow rates and two pressures, with a wide range of flow and pressure changes and can be adapted to different hole diameters for drilling and backwashing. In the design, new concepts, new structures, new materials and new processes are used, which make the pump compact in structure, lightweight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head and related parts are as standardized and universal as possible, making installation and maintenance convenient. The service life of vulnerable parts is long, and the reliability is high.

Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	60			
Cylinder diameter (mm)	70			
Flow (L/min)	180 71			
Pressure (MPa)	3. 2	8		
Input speed (r/min)	640			
Input power (KW)	12			
Dimensions (mm)	773×680×778			
Weight (kg)	252	2		
Hydraulic motor model	2K604-	0041		
Hydraulic motor pressure (MPa)	17			
Maximum motor flow (L/min)	56			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BW-180 Outline Dimension Drawing

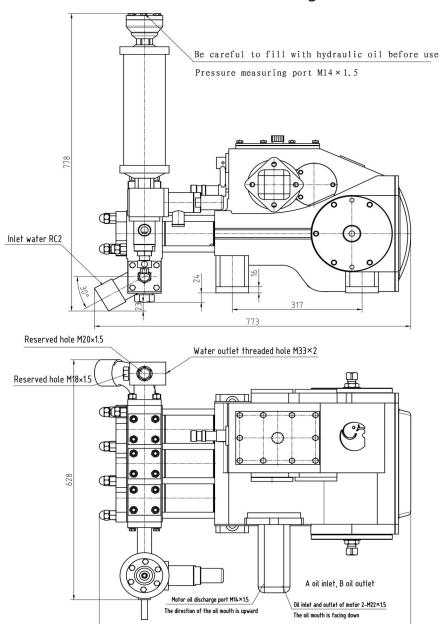

761



BWF-250 (Hydraulic Motor Driven)




The BWF-250 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a hydraulic motor. It is mainly used in conjunction with excavators of about 25 tons for non-excavation drilling, and can also be used for other applications such as grouting, mining drainage, and long-distance water delivery. The pump has four flow rates and four pressures, with a wide range of flow and pressure changes, making it suitable for different diameters of drilling and backfilling. The design adopts new concepts, new structures, new materials, and new processes and is compact, lightweight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are as standardized and universal as possible to facilitate installation and maintenance. The service life of wearing parts is long, and reliability is high.

Horizontal triplex reciprocati	ng single acting	piston p	oump		
Stroke (mm)	70				
Cylinder diameter (mm)	75				
Flow (L/min)	250 158 100 69				
Pressure (MPa)	2.5	4	6	9	
Input speed (r/min)	727				
Input power (KW)	14				
Dimensions (mm)	815×804×890				
Weight (kg)	290				
Hydraulic motor model	2K604-0041				
Hydraulic motor pressure (MPa)	17				
Maximum motor flow (L/min)	64				

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BWF-250 Outline Dimension Drawing

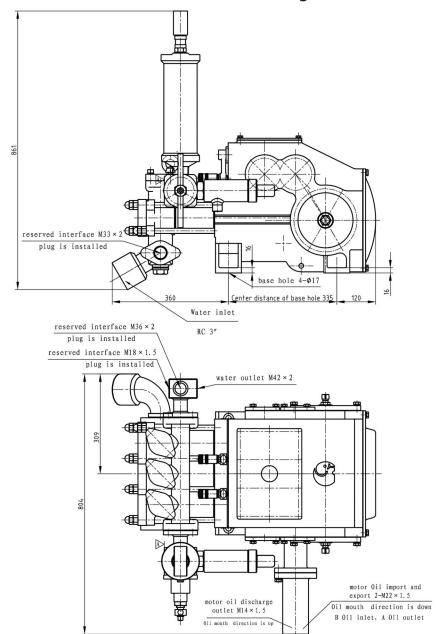



BW-320 (Hydraulic Motor Driven)






The BW-320 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drill rigs of around 35 tons, as well as for other purposes such as grouting, mine drainage, and long-distance water transport. This pump has four types of flow rates and four types of pressures, with a wide range of flow rate and pressure changes, making it suitable for different borehole diameters for drilling and backfilling. The design adopts new concepts, new structures, new materials, and new processes. The structure is compact, lightweight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are standardized and universalized as much as possible for easy installation and maintenance. The service life of vulnerable parts is long, with high reliability.


Horizontal triplex reciprocating single acting piston pump					
Stroke (mm)	110				
Cylinder diameter (mm)	80				
Flow (L/min)	320 230 165 118				
Pressure (MPa)	4 5 6 8				
Input speed (r/min)	535				
Input power (KW)	30				
Dimensions (mm)	1265 × 941 × 1026				
Weight (kg)	640				
Hydraulic motor model	1–175				
Hydraulic motor pressure (MPa)	20				
Maximum motor flow (L/min)	102				

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BW-320 Outline Dimension Drawing




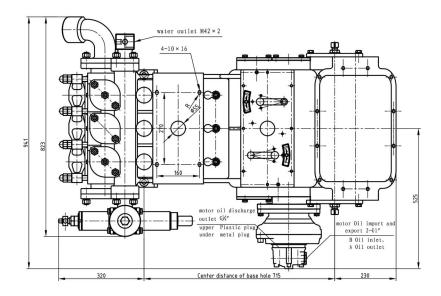



BW-400 (Hydraulic Motor Driven)







The BW-400 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump that is driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of around 40 tons, and can also be used for grouting, mine drainage and long-distance water delivery in other applications. The pump has four flow rates and four pressures, with a wide range of changes in flow rate and pressure to suit different borehole sizes and backflushing. The design incorporates new concepts and utilizes new structures, materials, and processes. It is compact in structure, light in weight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are designed to be as standardized and interchangeable as possible, making installation and maintenance easy. The service life of vulnerable parts is long and its reliability is high.

Horizontal triplex reciprocating single acting piston pump						
Stroke (mm)	110					
Cylinder diameter (mm)	85					
Flow (L/min)	400 290 200 150					
Pressure (MPa)	3 4.5 6 10					
Input speed (r/min)	538					
Input power(KW)	35					
Dimensions (mm)	1265 × 941 × 1026					
Weight (kg)	650					
Hydraulic motor model	1-175					
Hydraulic motor pressure (MPa)	20					
Maximum motor flow(L/min)	105					



BW-400 Outline Dimension Drawing

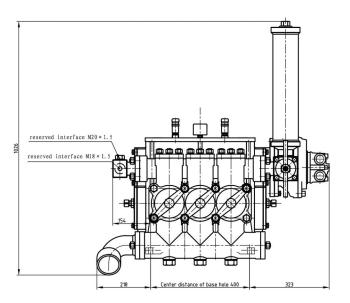

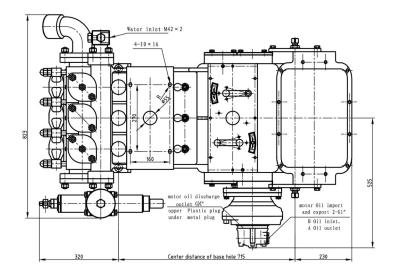



BWF-400 (Hydraulic Motor Driven)




The BWF-400 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of around 40 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four flow rates and four pressures, with a large range of flow rate and pressure changes, making it suitable for different drill hole diameters and backflushing. The design adopts new concepts, new structures, new materials, and new processes, with a compact structure, light weight, small size, and beautiful appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are as standardized and universalized as possible for convenient installation and maintenance. The service life of vulnerable parts is long, and the reliability is high.


Horizontal triplex reciprocating single acting piston pump					
Stroke (mm)	110				
Cylinder diameter (mm)	85				
Flow (L/min)	400 242 154 93				
Pressure (MPa)	2. 3	3.8	6	10	
Input speed (r/min)	515				
Input power(KW)	30				
Dimensions (mm)	$1265 \times 941 \times 1026$				
Weight (kg)	650				
Hydraulic motor model	1-150				
Hydraulic motor pressure (MPa)	20				
Maximum motor flow (L/min)	95				

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BWF-400 Outline Dimension Drawing

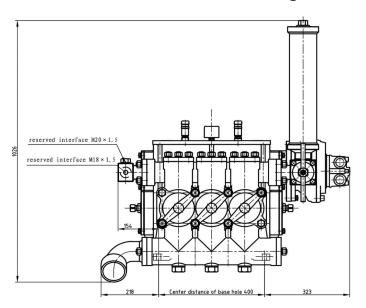

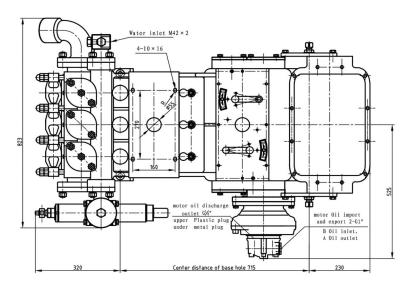



BW-450 (Hydraulic Motor Driven)






The BW-450 mud pump is a horizontal triplex reciprocating single-acting piston pump, driven by a hydraulic motor. It is mainly used with non-excavation drilling rigs of around 45 tons, but can also be used for grouting, mine drainage, and long-distance water transport. The pump has four flow rates and four pressures, with a wide range of variations to suit different hole diameters for drilling and backpulling. The design incorporates new concepts, materials, and processes, with a compact structure, lightweight, small size, and attractive appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are standardized and universal, making installation and maintenance convenient. The vulnerable parts have a long service life and high reliability.


Havinantal triplay regions acting single acting picture numer					
Horizontal triplex reciprocating single acting piston pump					
Stroke (mm)	110				
Cylinder diameter (mm)	95				
Flow (L/min)	450 320 230 165				
Pressure (MPa)	3.	. 5	4.5	6	8
Input speed (r/min)	508				
Input power (KW)	36				
Dimensions (mm)	$1265 \times 879 \times 1026$				
Weight (kg)	640				
Hydraulic motor model	1-200				
Hydraulic motor pressure (MPa)	20				
Maximum motor flow (L/min)	112				

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



BW-450 Outline Dimension Drawing

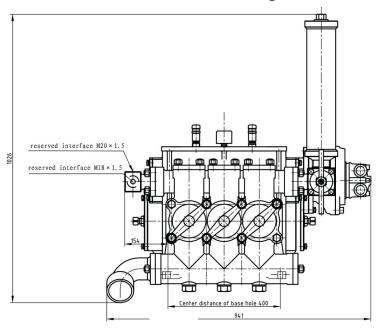

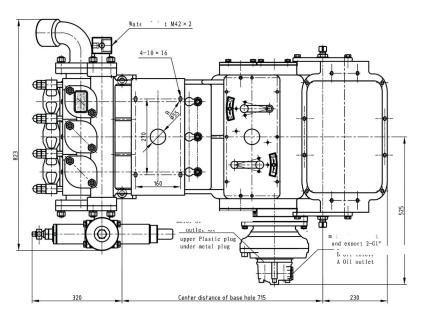



BW-600 (Hydraulic Motor Driven)




The BW-600 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, which is driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of about 70 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four different flow rates and four different pressures, with a wide range of flow and pressure changes, suitable for different borehole drilling and backfilling. The design incorporates new concepts, new structures, new materials, and new processes, with a compact structure, light weight, small size, and attractive appearance. It is easy to install and maintain, and features high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocati	na cinalo actino	n pictop r	numn	
	ing single acting	, , ,	•	
Stroke (mm)	110			
Cylinder diameter (mm)	100			
Flow (L/min)	600	415	280	195
Pressure (MPa)	3. 5	5	7. 5	10
Input speed (r/min)		55	50	
Input power (KW)		4	7	
Dimensions (mm)		1222×82	23×1026	
Weight (kg)		76	60	
Hydraulic motor model		2-2	250	
Hydraulic motor pressure (MPa)		2	0	
Maximum motor flow (L/min)		15	52	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




BW-600 Outline Dimension Drawing

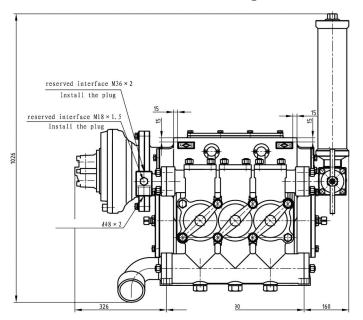

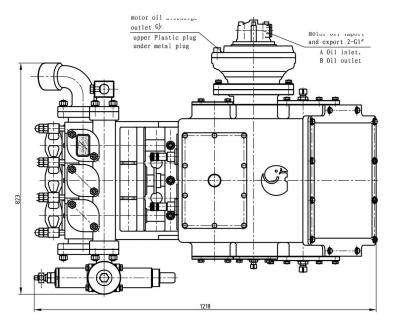



BW-800 (Hydraulic Motor Driven)




The BW-800 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a hydraulic motor. It is mainly used in conjunction with non-excavating drilling machines weighing around 90 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four flow rates and four pressure levels, with a large range of flow and pressure changes, making it suitable for different aperture drilling and backstroke. In terms of design, new concepts, new structures, new materials, and new processes are adopted; the structure is compact, light in weight, small in size, and aesthetically pleasing; installation and maintenance are convenient; and it has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)		13	35	
Cylinder diameter (mm)		11	10	
Flow (L/min)	800	550	370	260
Pressure (MPa)	3. 5	5	7. 5	10
Input speed (r/min)		50)3	
Input power(KW)		5	4	
Dimensions (mm)		1339×94	18×1019	
Weight (kg)		95	50	
Hydraulic motor model		2-3	350	
Hydraulic motor pressure (MPa)		2	0	
Maximum motor flow (L/min)		19	95	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




BW-800 Outline Dimension Drawing

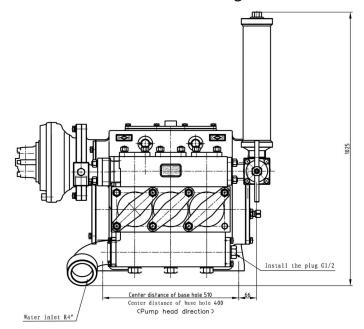

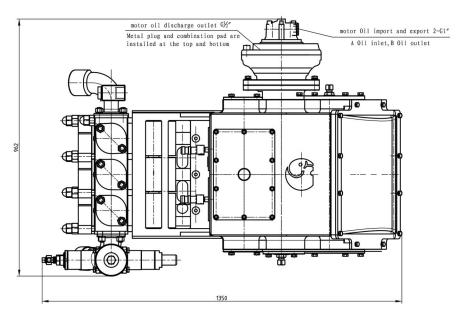



BW-1000 (Hydraulic Motor Driven)




The BW-1000 reciprocating pump is a horizontal, triplex, single-acting piston pump that is hydraulically driven. It is mainly used in conjunction with non-excavation drilling machines weighing around 100 tons, but can also be used for grouting, mine drainage, and long-distance water transportation, among other purposes. The pump has four flow rates and four pressures, with a large range of flow rate and pressure variations to accommodate different borehole drilling and backflow requirements. The design incorporates new concepts, structures, materials, and technologies, with a compact structure, light weight, small size, and attractive appearance. It is easy to install and maintain, and features high output pressure, longer life expectancy of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	140			
Cylinder diameter (mm)	115			
Flow (L/min)	1000	650	515	335
Pressure (MPa)	4	6	7.5	10
Input speed (r/min)		4'	75	
Input power(KW)	80			
Dimensions (mm)	$1477 \times 1004 \times 1003$			
Weight (kg)		13	00	
Hydraulic motor model		2-	120	
Hydraulic motor pressure (MPa)	25			
Maximum motor flow (L/min)		2:	22	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




BW-1000 Outline Dimension Drawing

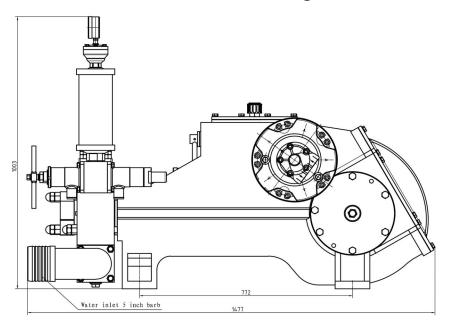

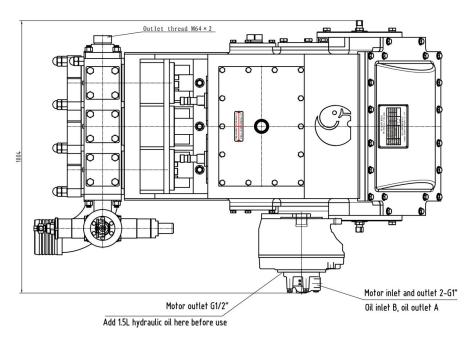



YBW-1200 (Hydraulic Motor Driven)




The YBW-1200 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines of about 150 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four flow rates and four pressures, and its flow and pressure range can be adjusted to suit different diameters of drilling and backflow. In terms of design, new concepts, structures, materials, and processes are adopted. The pump has a compact structure, light weight, small size, and beautiful appearance. It is easy to install and maintain, and has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	150			
Cylinder diameter (mm)	125			
Flow (L/min)	1200	779	600	385
Pressure (MPa)	4	6	8	12
Input speed (r/min)	480			
Input power (KW)	100			
Dimensions (mm)	$1596 \times 1170 \times 1242$			
Weight (kg)	1700			
Hydraulic motor model	2-500			
Hydraulic motor pressure (MPa)	25			
Maximum motor flow (L/min)		26	0	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



YBW-1200 Outline Dimension Drawing

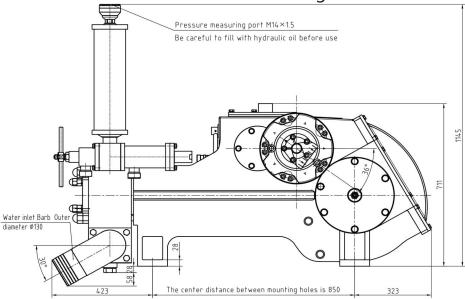

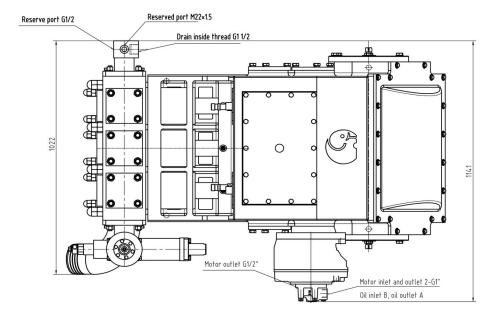



DXBH-200





The DXBH-200 reciprocating pump is a horizontal triplex single-acting piston pump driven by a hydraulic motor. It is primarily designed for use with 20-ton trenchless drilling rigs but can also be employed in other applications such as grouting, mine drainage, long-distance water delivery, geological exploration, and more. Featuring stepless speed regulation via a hydraulic motor, this pump adapts to drilling and pullback operations of varying borehole diameters. Its design incorporates innovative concepts, advanced structures, new materials, and modern manufacturing techniques, resulting in a compact, lightweight, and aesthetically pleasing unit. Key components-including the pump body, crankshaft, connecting rod, crosshead, pump head, and related parts—are highly standardized and modularized for easy installation and maintenance. The pump boasts extended service life for wear-prone components and high operational reliability.

Horizontal triplex reciprocating	single acting piston pump
Stroke(mm)	60
Cylinder diameter(mm)	70
Pump speed(r/min)	145~290
Flow(L/min)	100~200
Pressure(Mpa)	8~4
Input power(Kw)	15.4
Dimensions(mm)	824×748×707
Weight(kg)	275
Motor model	BD1-175~90 3H
Hydraulic motor pressure(Mpa)	20
Maximum motor flow(L/min) The product specifications and images provided may change due to de-	90




DXBH-200 Outline Dimension Drawing

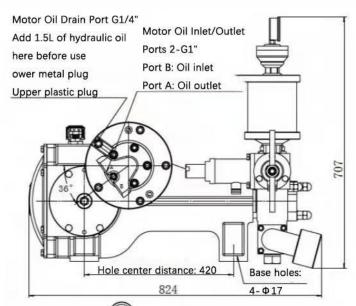

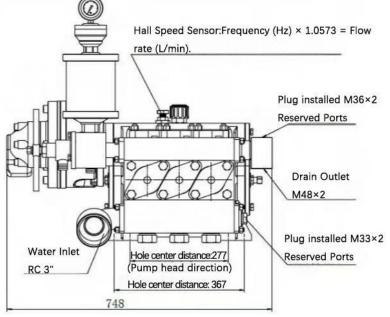



DXBH-300 (Hydraulic Motor Driven)




The DXBH-300 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, which is driven by a double displacement hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines of about 25 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has two flow rates and two pressures, and the shift operation is achieved by remote adjustment of the hydraulic motor flow rate, which changes the traditional manual shift operation mode. The pump adopts new concepts and new structures; it is compact in structure, beautiful in appearance, easy to install and maintain, with a longer life span for vulnerable parts and stable performance.


Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	75	
Cylinder diameter (mm)	80	
Flow (L/min)	300 ~ 150	
Pressure (MPa)	4 ~ 8	
Input speed (r/min)	895 ~ 448	
Input power(KW)	24	
Dimensions (mm)	970 × 820 × 880	
Weight (kg)	380	
Hydraulic motor model	BD1 175~90	
Hydraulic motor pressure (MPa)	21	
Maximum motor flow (L/min)	88	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXBH-300 Outline Dimension Drawing

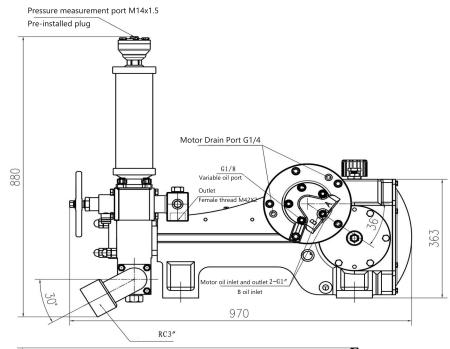


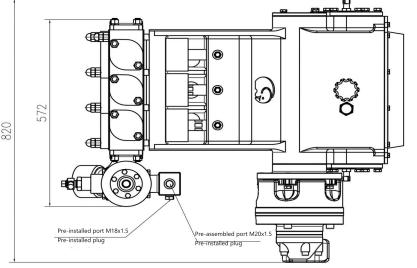



DXB-300/8 (Hydraulic Motor Driven)






The DXB-300/8 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a hydraulic motor. It is mainly used for tunnel drilling rigs, trenchless drilling rigs, and can also be used for other purposes, such as grouting, mine drainage, and long-distance water delivery. The pump can adjust the flow rate by remotely adjusting the hydraulic motor flow, and can also be equipped with a variable motor, changing the traditional manual shift operation mode. The pump adopts a new concept and structure, with a compact structure, beautiful appearance, easy installation and maintenance, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	80	
Cylinder diameter (mm)	85	
Flow (L/min)	300	
Pressure (MPa)	8	
Input speed (r/min)	460	
Input power (KW)	48	
Dimensions (mm)	$1045 \times 945 \times 1040$	
Weight (kg)	585	
Hydraulic motor model	2-350	
Hydraulic motor pressure (MPa)	21	
Maximum motor flow (L/min)	177	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




DXB-300/8 Outline Dimension Drawing

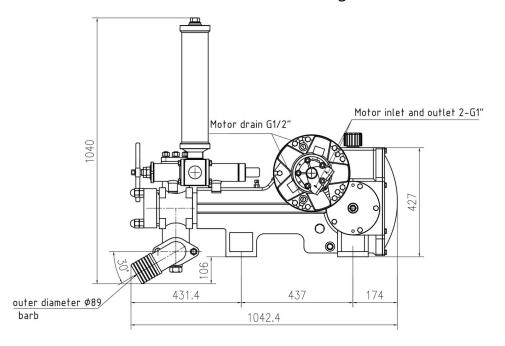

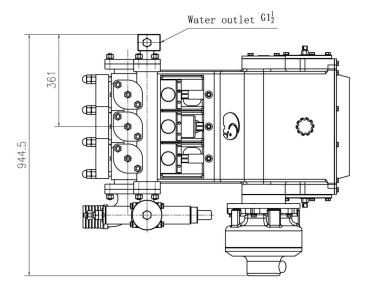



DXB-330/10 (Hydraulic Motor Driven)






The DXB-330/10 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump driven by a hydraulic motor. It is mainly used for tunneling rig matching, but can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. This pump can adjust the flow rate remotely by adjusting the flow of the hydraulic motor, which changes the traditional manual shift operation mode. The pump adopts a new concept and a new structure. The one-way valve adopts Vaner (with high volumetric efficiency and low working noise), compact structure, beautiful appearance, easy installation, maintenance and longer life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	110	
Cylinder diameter (mm)	80	
Flow (L/min)	330	
Pressure (MPa)	10	
Input speed (r/min)	682	
Input power (KW)	65	
Dimensions (mm)	$1085 \times 980 \times 900$	
Weight (kg)	750	
Hydraulic motor model	XM2-300	
Hydraulic motor pressure (MPa)	21. 5	
Maximum motor flow (L/min)	682	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information



DXB-330/10 Outline Dimension Drawing

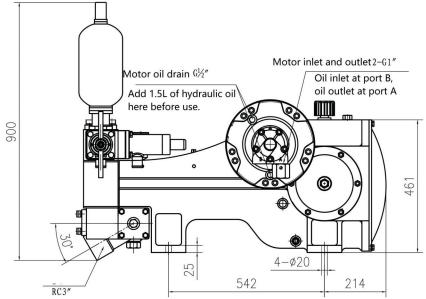

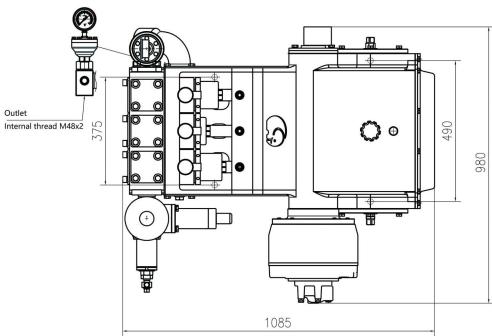



DXBH-400 (Hydraulic Motor Driven)




The DXBH-400 reciprocating pump is a horizontal, triplex reciprocating single-acting piston pump, driven by a dual-displacement hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines of about 40 tons, but can also be used for other purposes such as injection grouting, mine drainage, and long-distance water transfer. The pump has two flow rates and two pressures, which can be achieved by remotely adjusting the hydraulic motor flow, thus changing the traditional manual gear-shifting operation mode. The pump adopts a new concept and structure, with a compact structure, beautiful appearance, easy installation and maintenance, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	80		
Cylinder diameter (mm)	95		
Flow (L/min)	400 ~ 200		
Pressure (MPa)	4 ~ 8		
Input speed (r/min)	980 ~ 490		
Input power (KW)	32		
Dimensions (mm)	1026 × 906 × 900		
Weight (kg)	500		
Hydraulic motor model	BD1-250~125		
Hydraulic motor pressure (MPa)	21		
Maximum motor flow (L/min)	125		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXBH-400 Outline Dimension Drawing

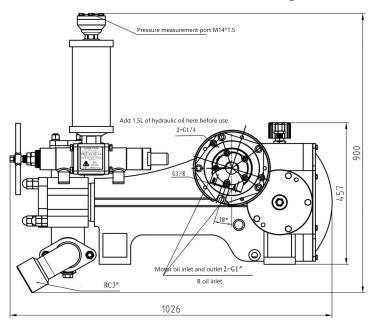

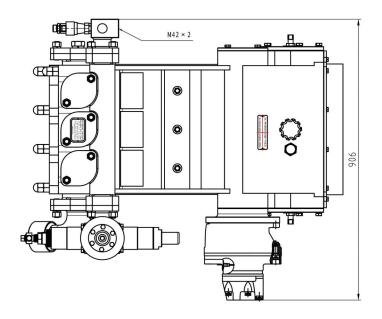



DXB-500 (Hydraulic Motor Driven)




The DXB-500 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump driven by a dual-displacement hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines of around 50 tons, but can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has two flow rates and two pressures, which can be adjusted remotely by adjusting the hydraulic motor flow rate, thereby achieving gear shifting operations, changing the traditional manual gear shifting operation mode. The pump adopts a new concept and new structure, and the one-way valve adopts a Vernal design (with high volumetric efficiency and low working noise). It has a compact structure and attractive appearance, and is easy to install and maintain. The service life of vulnerable parts is longer and performance is stable.


Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	80		
Cylinder diameter (mm)	85		
Flow (L/min)	500 250		
Pressure (MPa)	3.5 7		
Input speed (r/min)	765 382		
Input power (KW)	37		
Dimensions (mm)	929 × 948 × 969		
Weight (kg)	600		
Hydraulic motor model	SAI2-350-170		
Hydraulic motor pressure (MPa)	20		
Maximum motor flow (L/min)	147		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXB-500 Outline Dimension Drawing

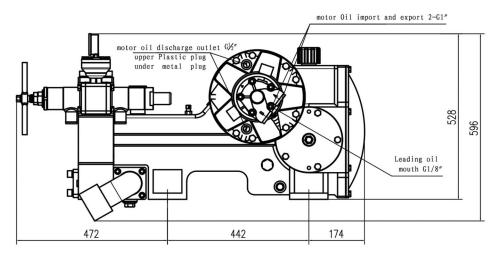

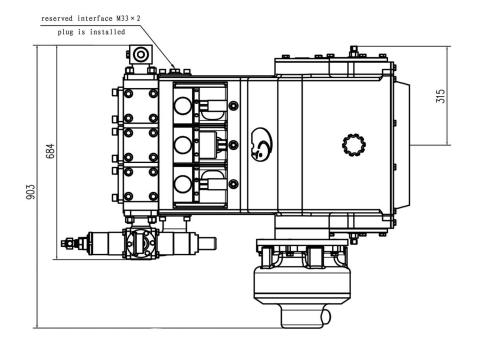



DXB-500/10 (Hydraulic Motor Driven)






The DXB-500/10 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump. It is driven by a high-displacement hydraulic motor and mainly used for matching with tunnel drilling machines. It can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. This pump can adjust the flow rate by remote hydraulic motor flow control, changing the traditional manual shifting operating mode. The pump adopts new concepts and structures. The one-way valve uses Vanaar (with high volumetric efficiency and low working noise), with a compact structure, beautiful appearance, convenient installation and maintenance, long service life of vulnerable parts and stable performance.

Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	135	
Cylinder diameter (mm)	100	
Flow (L/min)	500	
Pressure (MPa)	10	
Input speed (r/min)	700	
Input power(KW)	100	
Dimensions (mm)	1178×1023×995	
Weight (kg)	850	
Hydraulic motor model	SAI 4-400	
Hydraulic motor pressure (MPa)	23	
Maximum motor flow (L/min)	300	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXB-500/10Outline Dimension Drawing

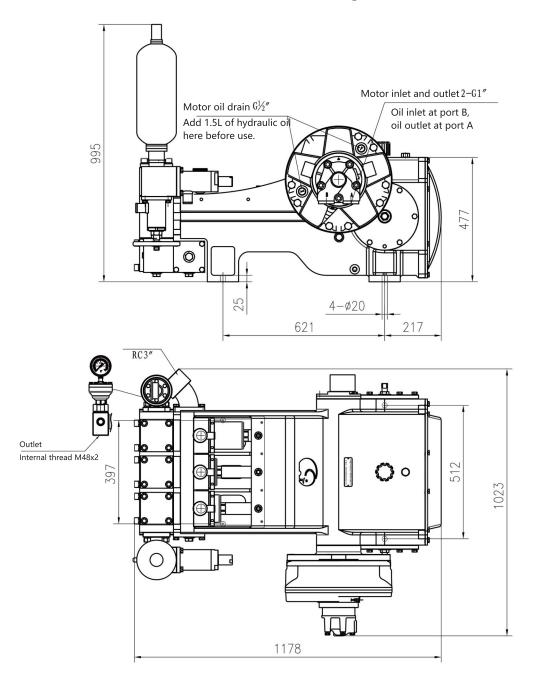



DXB-600 (Hydraulic Motor Driven)




The DXB-600 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a dual displacement hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs weighing around 70 tons, and can also be used for other purposes such as grouting, mine drainage, and long distance water delivery. The pump has two flow rates and two pressures, and shifting operations are achieved by remote adjustment of the hydraulic motor flow rate, changing the traditional manual shifting mode. The pump adopts a new concept and structure; the one-way valve adopts a Vannell design (with high volumetric efficiency and low working noise), with a compact structure and beautiful appearance, easy installation and maintenance, long service life for vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	110		
Cylinder diameter (mm)	95		
Flow (L/min)	600 300		
Pressure (MPa)	4 8		
Input speed (r/min)	880 440		
Input power(KW)	48		
Dimensions (mm)	$1085 \times 950 \times 981$		
Weight (kg)	710		
Hydraulic motor model	SAI2-350-170		
Hydraulic motor pressure (MPa)	20		
Maximum motor flow (L/min)	170		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXB-600 Outline Dimension Drawing

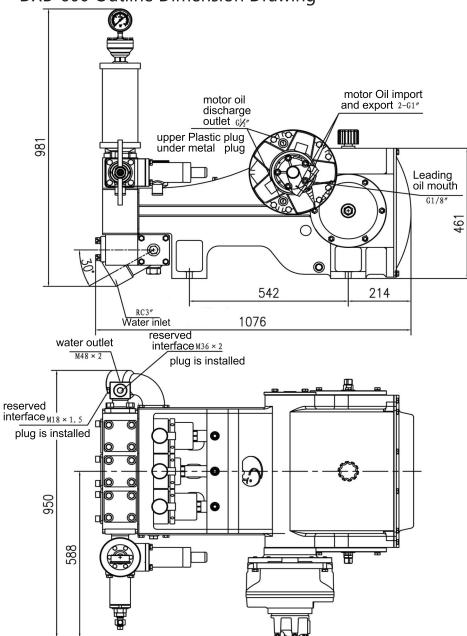



DXBH-600 (Hydraulic Motor Driven)




The DXBH-600 reciprocating pump is a horizontal, triplex, single-acting piston pump that uses a double-displacement hydraulic motor drive. It is mainly used in conjunction with non-excavation drilling rigs weighing around 50 tons, but can also be used for other purposes such as injection grouting, mine drainage, and long-distance water delivery. The pump has two flow rates and two pressures, and the shifting operation is achieved by remotely adjusting the hydraulic motor flow rate, changing the traditional manual shifting operation mode. This pump adopts new concepts and new structures; it has a compact structure, beautiful appearance, easy installation and maintenance, and longer life for vulnerable parts with stable performance.


Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	110		
Cylinder diameter (mm)	100		
Flow (L/min)	600 300		
Pressure (MPa)	4 8		
Input speed (r/min)	928 464		
Input power(KW)	48		
Dimensions (mm)	1140 × 937 × 880		
Weight (kg)	635		
Hydraulic motor model	2-350-170		
Hydraulic motor pressure (MPa)	21		
Maximum motor flow (L/min)	180		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXBH-600 Outline Dimension Drawing

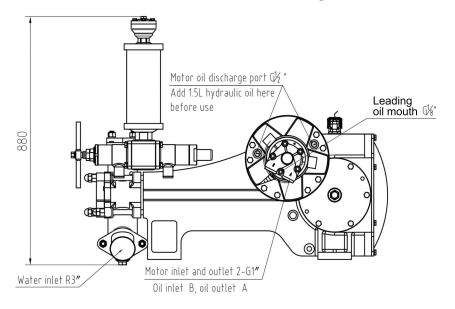

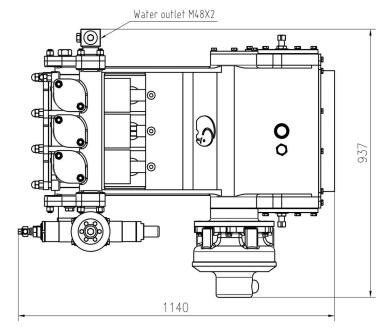



DXB-800 (Hydraulic Motor Driven)




The DXB-800 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a dual-displacement hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of about 80 tons, as well as for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has two flow rates and two pressures, which can be achieved by remotely adjusting the hydraulic motor flow to achieve gear shifting operations, changing the traditional manual gear shifting operation mode. The pump adopts a new concept and new structure; the one-way valve adopts Vane (high volumetric efficiency, low working noise), compact structure, beautiful appearance, easy installation and maintenance, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	135		
Cylinder diameter (mm)	105		
Flow (L/min)	800 400		
Pressure (MPa)	4 8		
Input speed (r/min)	1170 585		
Input power(KW)	64		
Dimensions (mm)	1178 × 1038 × 1022		
Weight (kg)	820		
Hydraulic motor model	SAI2-350-170		
Hydraulic motor pressure (MPa)	20		
Maximum motor flow (L/min)	220		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXB-800 Outline Dimension Drawin

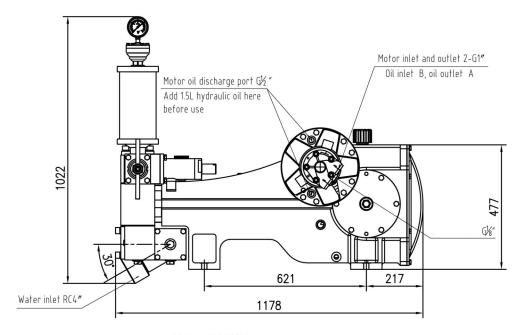

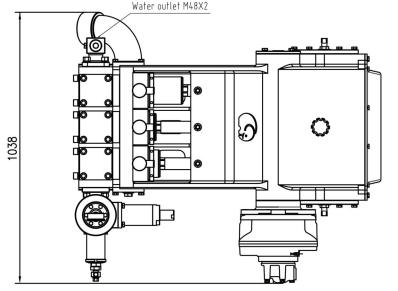



DXBH-800 (Hydraulic Motor Driven)




The DXBH-800 reciprocating pump is a horizontal triplex single-acting piston pump that uses a dual displacement hydraulic motor for driving. It is mainly used in conjunction with non-excavation drilling machines of around 65 tons, and can also be used for other applications such as grouting, mine drainage, and long-distance water delivery. The pump has two flow rates and two pressures, which can be changed by remote adjustment of the hydraulic motor flow, enabling shift operations and changing the traditional manual shift mode. The pump employs a new concept and structure, featuring compact design, attractive appearance, convenient installation and maintenance, long life for vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	110	
Cylinder diameter (mm)	110	
Flow (L/min)	800 400	
Pressure (MPa)	4 8	
Input speed (r/min)	1200 600	
Input power(KW)	64	
Dimensions (mm)	1240 × 935 × 890	
Weight (kg)	730	
Hydraulic motor model	2-350-170	
Hydraulic motor pressure (MPa)	21	
Maximum motor flow (L/min)	230	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXBH-800 Outline Dimension Drawing

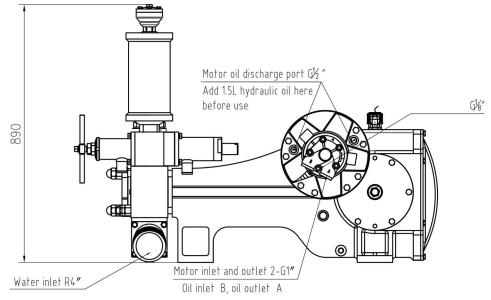

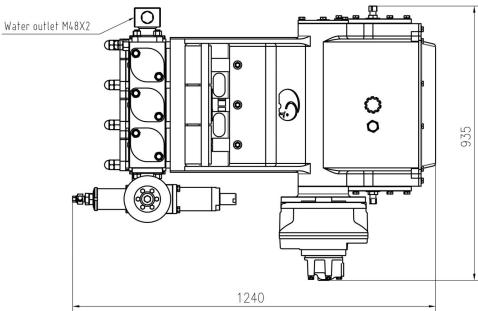



DXBH-1000Y




The DXBH-1000Y reciprocating pump is a horizontal triplex single-acting piston pump driven by a dual-displacement hydraulic motor. It is primarily designed for use with 100-ton trenchless drilling rigs but can also be employed in other applications such as grouting, mine drainage, and long-distance water delivery. This pump features two flow rates and two pressure levels, enabling gear shifting operations through remote adjustment of the hydraulic motor's flow rate, replacing traditional manual shifting methods. With innovative design and advanced structure, the pump incorporates high-efficiency poppet valves (offering high volumetric efficiency and low operational noise). It boasts a compact design, aesthetically pleasing appearance, easy installation and maintenance, extended service life for wear-prone components, and stable performance.


Stroke(mm)	140		
Crylinder diameter(mm)	115		
Pump speed(r/min)	232 116		
Flow(L/min)	1000 500		
Pressure(Mpa)	4 8		
Motor speed (r/min)	4600 3000		
Maximum suction height (m)	107 55		
Input power(Kw)	80		
Inlet connection	Rc 5* Quick Connect		
Outlet connection	M64×2		
Dimensions(mm)	1446 × 1012 × 1026		
Weight(kg)	1281		
Hydraulic motor model	L6VM107EZ2/63W-VZB020B-0550		
Hydraulic motor rated pressure (MPa)	35		
Maximum motor flow(L/min)	321		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXBH-1000Y Outline Dimension Drawing

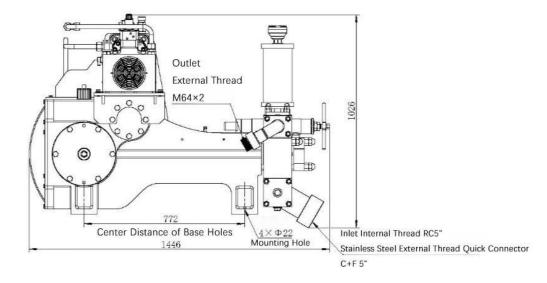

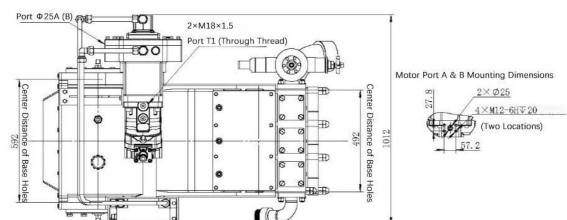




DXBH-1200









The DXBH-1200 reciprocating pump is a horizontal triplex single-acting piston pump driven by a dual-displacement hydraulic motor. It is primarily designed for use with 150-ton trenchless drilling rigs but can also be employed for other applications such as grouting, mine drainage, and long-distance water delivery. This pump features two flow rates and two pressure settings, enabling gear shifting operations through remote adjustment of the hydraulic motor's flow rate, replacing traditional manual shifting methods. With innovative design and advanced structure, the pump incorporates high-efficiency valves (delivering high volumetric efficiency and low operational noise). It boasts a compact design, aesthetically pleasing appearance, easy installation and maintenance, extended service life for wear-prone parts, and stable performance.

Horizontal triplex reciprocatin	g single acting piston pump		
Stroke(mm)	150		
Cylinder diameter(mm)	125		
Flow(L/min)	1200 600		
Pressure(Mpa)	4 8		
Motor speed (r/min)	1075 540		
Motor displacement (ml/r)	246 493		
Input power(Kw)	100		
Maximum suction height (m)	2.5		
Inlet connection	Φ130		
Outlet connection	M64×2		
Dimensions(mm)	1551 × 1325 × 1067		
Weight(kg)	1596		
Motor model	XHBD4-500/250IDD90		
Hydraulic motor model	1750/3500		
Hydraulic motor rated pressure (MPa)	25		
Maximum motor flow(L/min)	295		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

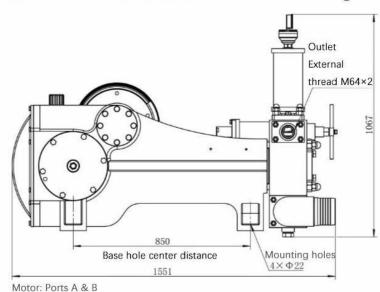

ELEPHANT

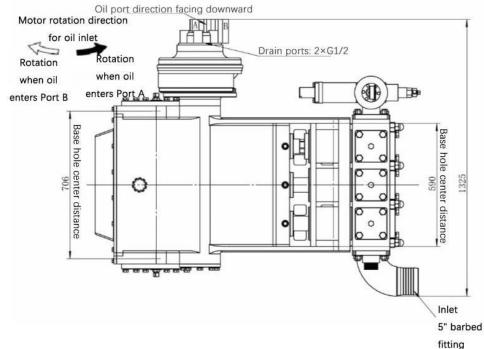



DBW-100 (Motor power)




The DBW-100 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a variable frequency electric motor through a coupling reduction gear. It is mainly used for conveying flushing fluid to the drill hole during geological core drilling, and can also be used for other purposes such as grouting, sewage discharge, and long-distance water delivery. It can be adapted to different diameters of drilling and backhaul. The design incorporates new concepts, new structures, new materials, and new processes; it has a compact structure, light weight, small size, and beautiful appearance; it is easy to install and maintain; and has the characteristics of high output pressure, long service life of wearing parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	60		
Cylinder diameter (mm)	55		
Flow (L/min)	100		
Pressure (MPa)	5		
Input speed (r/min)	240		
Input power (KW)	10		
Dimensions (mm)	1237 × 753 × 948		
Weight (kg)	350		
Motor model	RF77YVP160M4		
Motor power (KW)	11		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DBW-100 Outline Dimension Drawing

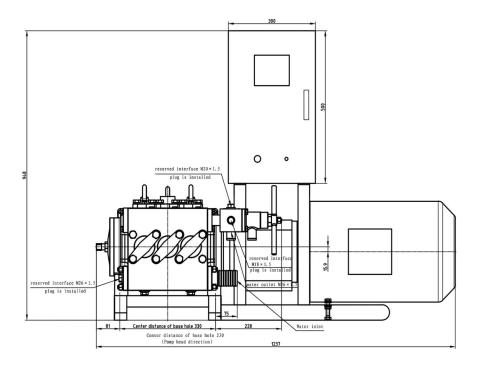

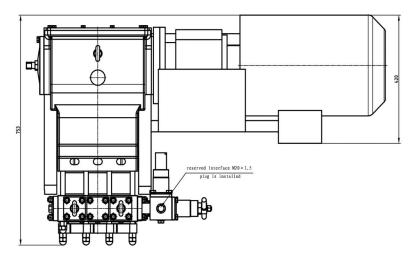



DBW-100Q






The DBW-100Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump. It is driven by a three-phase asynchronous motor through a gearbox. It is mainly used to deliver flushing fluid to the drilling hole in geological core drilling, and can also be used for other purposes such as grouting, sewage discharge, and long-distance water delivery. It can be used for drilling and backhaul of different diameters. In the design, new concepts, new structures, new materials, and new processes are adopted. The structure is compact, light in weight, small in size, and beautiful in appearance. It is easy to install and maintain with high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	48		
Cylinder diameter (mm)	55		
Flow (L/min)	100		
Pressure (MPa)	5. 5/7		
Input speed (r/min)	295		
Input power (KW)	14		
Dimensions (mm)	$1200 \times 615 \times 540$		
Weight (kg)	290/310		
Motor model	Y160-4/B35		
Motor power (KW)	11/15		


The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DBW-100Q Outline Dimension Drawing

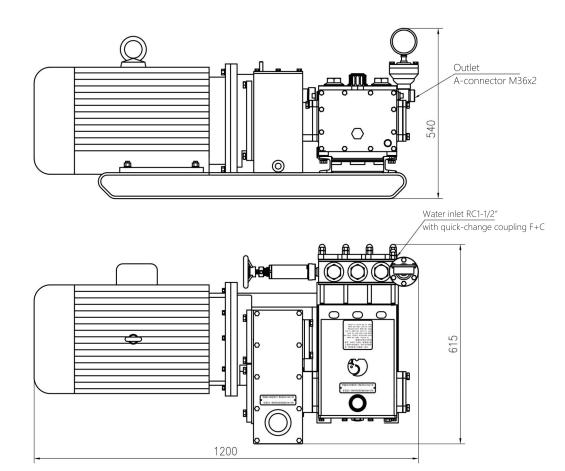



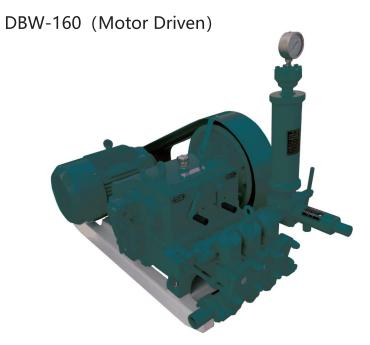


The DBW-160 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump that is powered by electric motor. It is mainly used to convey flushing fluid into the drilling hole during geological core drilling, and can also be used for other applications such as grouting, sewage disposal, and long-distance water delivery. The pump has four flow rates and four pressures, with a wide range of flow rate and pressure variations to accommodate different borehole drilling and backflushing. In its design, new concepts, new structures, new materials, and new processes are adopted. The pump is compact in structure, light in weight, small in size, and aesthetically pleasing. It is easy to install and maintain and features high output pressure, long service life of wearing parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	70			
Cylinder diameter (mm)	70			
Flow (L/min)	160	107	67	44
Pressure (MPa)	2. 7	4	6.5	10
Input speed (r/min)	540			
Input power(kW)	9			
Dimensions (mm)	$1500 \times 825 \times 960$			
Weight (kg)	508			
Motor model	YE3-160M-4			
Motor Power (kW)	11			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information



DBW-160 Outline Dimension Drawing

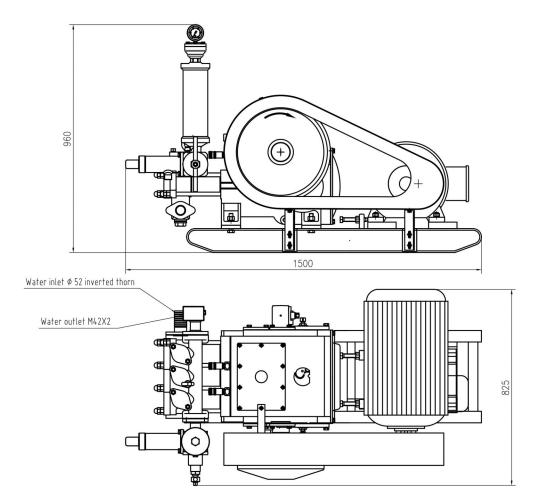



DXBH-200E




The DXBH-200E reciprocating pump is a horizontal triplex single-acting piston pump, driven by a permanent magnet synchronous motor for high efficiency, energy savings, and environmental friendliness. It is primarily designed for use with 20-ton trenchless drilling rigs but can also be employed in other applications such as grouting, mine drainage, and long-distance water delivery. The pump features a wide range of adjustable flow rates and pressures, with remote stepless speed control via a controller, enabling constant power output during variations in flow and pressure. This eliminates the traditional manual gear-shifting operation mode. Designed with innovative concepts and a modern structure, the pump is compact, aesthetically pleasing, and easy to install and maintain. It offers extended service life for wear-prone parts and ensures stable performance.

Horizontal triplex reciprocating single acting piston pump		
Stroke(mm)	60	
Cylinder diameter(mm)	70	
Pump speed(r/min)	145~290	
Flow(L/min)	100~200	
Pressure((Mpa)	8~4	
Input power(Kw)	15.4	
Dimensions(mm)	825 × 831 × 775	
Weight(kg)	370	
Motor Model	TYC24-1750-L120M10	
Rated Current / Maximum Current (A)	77.8/140	
Rated Power / Peak Power (kW)	24/40.8	
Rated Speed / Maximum Speed (r/min)	1750/3500	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXBH-200E Outline Dimension Drawing

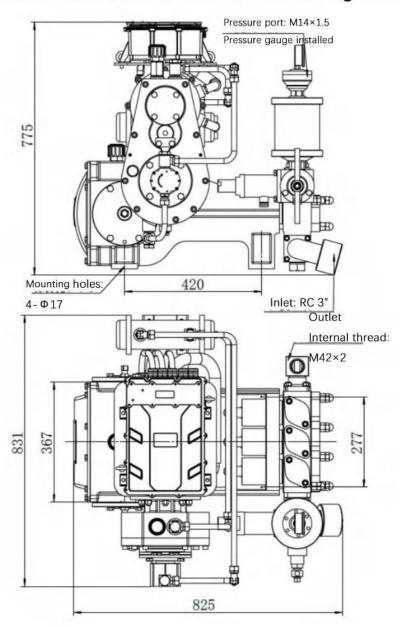






The DBW-250 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by an electric motor. It is mainly used to convey flushing fluid into the borehole during geological core drilling, but can also be used for grouting, sewage discharge, and long-distance water delivery. The pump has four flow rates and four pressures, with a wide range of flow and pressure changes, making it suitable for different borehole diameters. The design adopts new concepts, new structures, new materials, and new processes. It has a compact structure, light weight, small size, and elegant appearance. It is easy to install and maintain, has high output pressure, longer life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	75		
Cylinder diameter (mm)	80		
Flow (L/min)	250 165 122 79		
Pressure (MPa)	2.6 4 5.4 8		
Input speed (r/min)	420		
Input power(kW)	13		
Dimensions (mm)	1580 × 860 × 1010		
Weight (kg)	670		
Motor model	YE3-160L-4		
Motor Power (kW)	15		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DBW-250 Outline Dimension Drawing

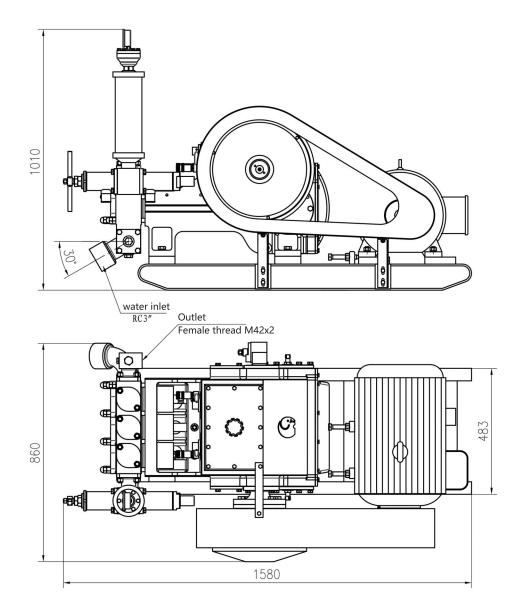



DBWF-250 (Motor Driven)




The DBWF-250 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by an electric motor. It is mainly used for delivering flushing fluid into the borehole during geological core drilling, and can also be used for grouting, sewage discharge, and long-distance water supply for other purposes. The pump has four flow rates and four pressures, with a wide range of variations in flow rate and pressure to accommodate different borehole diameters for drilling and backhaul. In its design, new concepts, structures, materials, and processes are applied to create a compact structure, light weight, small size, and attractive appearance, as well as convenience in installation and maintenance. It features high output pressure, longer lifespan of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	70
Cylinder diameter (mm)	75
Flow (L/min)	250 158 100 69
Pressure (MPa)	2.5 4 6 9
Input speed (r/min)	727
Input power(kW)	13
Dimensions (mm)	1560 × 830 × 970
Weight (kg)	560
Motor model	YE3-160L-4
Motor Power (kW)	15


 $The product specifications \ and \ images \ provided \ may \ change \ due \ to \ design \ improvements \ and \ upgrades. \ Please feel \ free \ to \ inquire \ for \ more \ information.$



DBWF-250 Outline Dimension Drawing

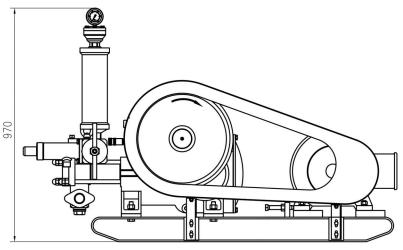


Water inlet Ø 79 inverted thorn

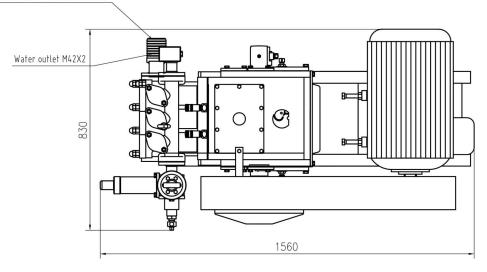



DXBH-300EQ




The DXBH-300EQ reciprocating pump is a horizontal triplex single-acting piston pump, driven by a permanent magnet synchronous motor for high efficiency, energy savings, and environmental friendliness. It is primarily designed for use with 30-ton trenchless drilling rigs but can also be employed in other applications such as grouting, mine drainage, and long-distance water delivery. This pump features a wide range of adjustable flow rates and pressures, enabling remote stepless speed regulation via a controller. The flow and pressure variations can maintain constant power output, replacing traditional manual gear-shifting operations. With innovative design concepts and a compact structure, the pump boasts an aesthetically pleasing appearance, easy installation and maintenance, extended service life for wear-prone parts, and stable performance.


C+	
Stroke(mm)	75
Cylinder diameter(mm)	80
Pump speed(r/min)	133~266
Flow(L/min)	150~300
Pressure(Mpa)	8~4
Input power(Kw)	23
Dimensions(mm)	1700 × 1429 × 1265
Weight(kg)	1050
Motor Model	TYC24-1750-L120M10
Rated Current / Maximum Current (A)	77.8/140
Rated Power / Peak Power (kW)	24/40.8
Rated Speed / Maximum Speed (r/min)	1750/3500

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXBH-300EQ Outline Dimension Drawing

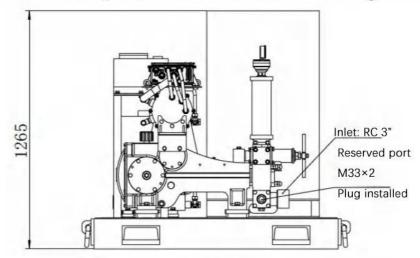


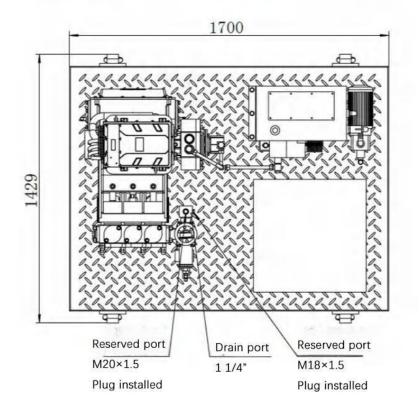



DBW-320 (Motor Driven)






The DBW-320 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump driven by an electric motor. It is mainly used in geological core drilling to deliver washing fluid into the borehole and can also be used for other purposes such as grouting, drainage, and long-distance water delivery. This pump has four flow rates and four pressures, with a wide range of flow and pressure changes, making it suitable for different hole sizes for drilling and backwashing. It adopts new concepts, new structures, new materials, and new processes in its design, with a compact structure, light weight, small size, attractive appearance, easy installation and maintenance, and has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	110
Cylinder diameter (mm)	80
Flow (L/min)	320 230 165 118
Pressure (MPa)	4 5 6 8
Input speed (r/min)	535
Input power (KW)	27
Dimensions (mm)	1870 × 940 × 1240
Weight (kg)	1000
Motor model	Y200L-4-B3
Motor Power (KW)	30

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




DBW-320 Outline Dimension Drawing

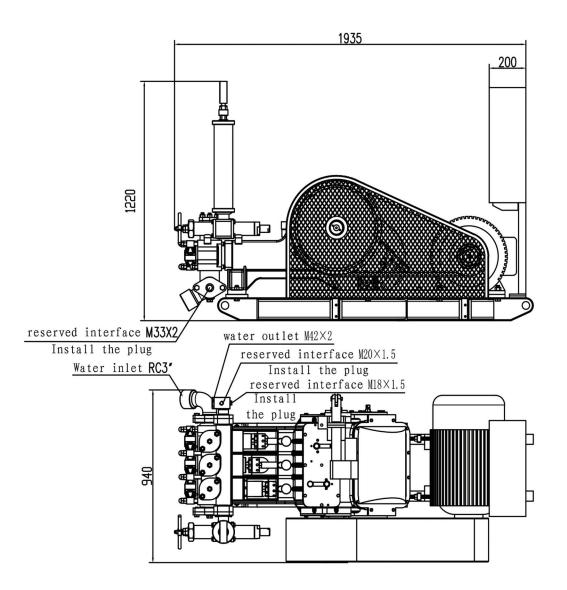



DXBH-400E (Hydraulic Motor Driven)




The DXBH-400E reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump. It is driven by a permanent magnet synchronous motor, and is highly efficient, energy-saving, and environmentally friendly. It is mainly used in conjunction with non-excavation drilling machines of around 65 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance transportation. The pump has a wide range of flow and pressure adjustment, and can achieve constant power through remote stepless speed control by a controller. This changes the traditional manual shift operation mode and adopts new concepts and new structures. It has a compact design, easy installation and maintenance, and long service life of vulnerable parts, with stable performance.


Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	80
Cylinder diameter (mm)	95
Flow (L/min)	400 ~ 200
Pressure (MPa)	4 ~ 8
Input speed (r/min)	118 ~ 235
Input power (KW)	32
Dimensions (mm)	1017×809×748
Weight (kg)	720
Hydraulic motor model	TZ210XSLG23A
Hydraulic motor pressure (MPa)	35/50
Maximum motor flow (L/min)	1700/8000

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




DXBH-400E Outline Dimension Drawing

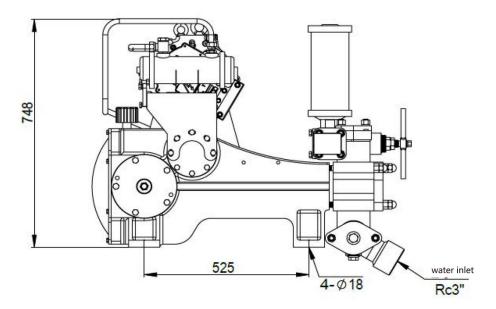

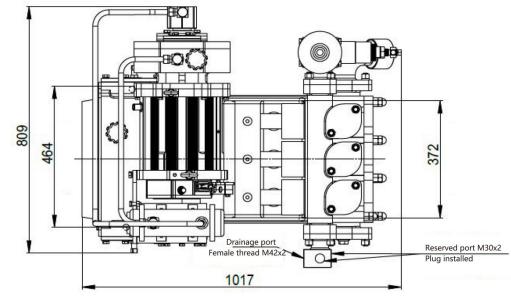



DBW-600 (Motor Driven)

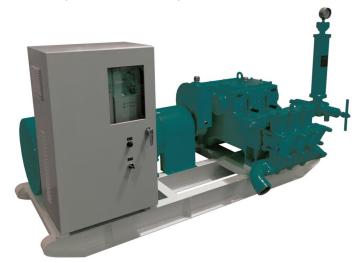


The DBW-600 reciprocating pump is a horizontal, triplex reciprocating single-acting piston pump that is driven by a variable frequency electric motor and transmitted through a coupling reducer. It is mainly used to transport flushing fluid into the borehole during geological core drilling, and can also be used for grouting, drainage, and long-distance water delivery. The pump has four flow rates and four pressures, and each gear can be infinitely adjusted through the frequency converter. The range of flow rate and pressure changes is large, which can be suitable for drilling and backhaul operations with different diameters. The design adopts new concepts, new structures, new materials, and new processes; the structure is compact, light in weight, small in size, and beautiful in appearance; it is easy to install and maintain; and it has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	110
Cylinder diameter (mm)	100
Flow (L/min)	600 415 280 195
Pressure (MPa)	3.5 5 7.5 10
Input speed (r/min)	550
Input power(KW)	42
Dimensions (mm)	2065×1225×1325
Weight (kg)	1280
Motor model	YVF2 225M-4
Motor Power (KW)	45

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DBW-600 Outline Dimension Drawing

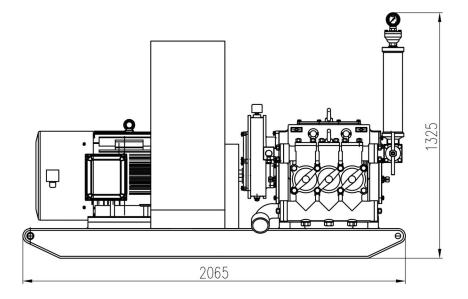

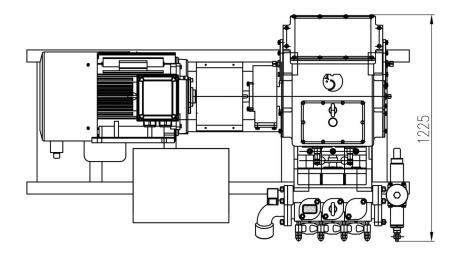






DXBH-600E Outline Dimension Drawing



The DXBH-600E reciprocating pump is a horizontal triplex reciprocating single-acting piston pump that is driven by a permanent magnet synchronous motor for high efficiency, energy saving, and environmental protection. It is mainly used for matching with non-excavation drilling machines of around 65 tons, but can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. This pump has a large range of flow and pressure adjustment, and can achieve constant power by remote infinitely variable speed control through the controller, changing the traditional manual gear shifting operation mode. The pump adopts a new concept and a new structure, with a compact structure, beautiful appearance, convenient installation and maintenance, longer service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	110
Cylinder diameter (mm)	100
Flow (L/min)	600 ~ 300
Pressure (MPa)	3.5 ~ 7
Input speed (r/min)	3500 ~ 1750
Input power(KW)	42
Dimensions (mm)	1120×1007×1017
Weight (kg)	850
Hydraulic motor model	YQW4-160Z
Hydraulic motor pressure (MPa)	55
Maximum motor flow (L/min)	3500

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

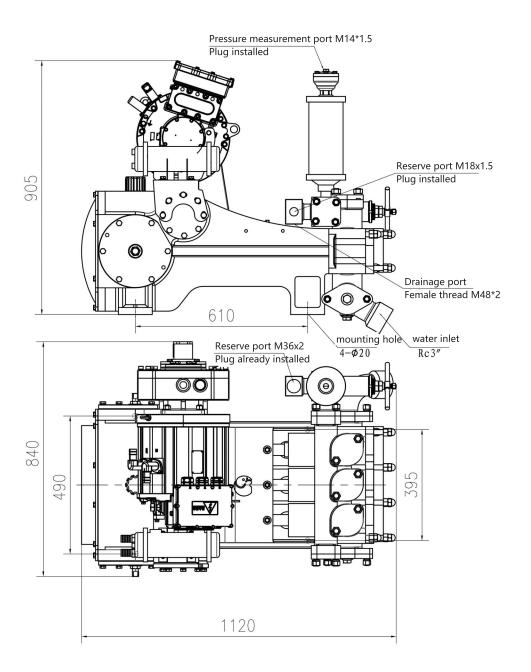



DBW-800 (Motor Driven)

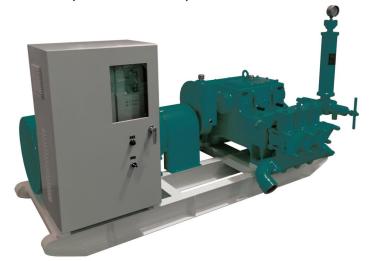


The DBW-800 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump that is driven by a variable frequency electric motor and transmitted through a coupling reducer. It is mainly used to deliver flushing fluid into the borehole during geological core drilling, and can also be used for other purposes such as grouting, sewage discharge, and long-distance water delivery. The pump has four flow rates and four pressures, and all gears can be infinitely adjusted by the frequency converter. The flow and pressure range is large and can be applied to different hole sizes for drilling and backpulling. The design adopts new concepts, new structures, new materials, and new processes; the structure is compact, light in weight, small in size, and beautiful in appearance; installation and maintenance are convenient; it has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	135
Cylinder diameter (mm)	110
Flow (L/min)	800 550 370 260
Pressure (MPa)	3.5 5 7.5 10
Input speed (r/min)	500
Input power (KW)	55
Dimensions (mm)	2065×1360×1340
Weight (kg)	1880
Motor model	YVF2 250M-4
Motor Power (KW)	55

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DBW-800 Outline Dimension Drawing

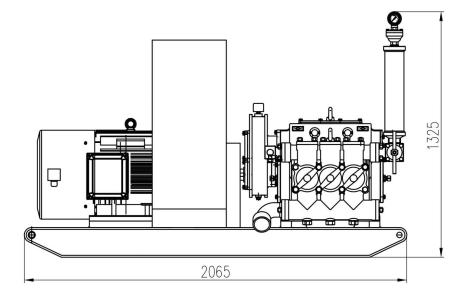

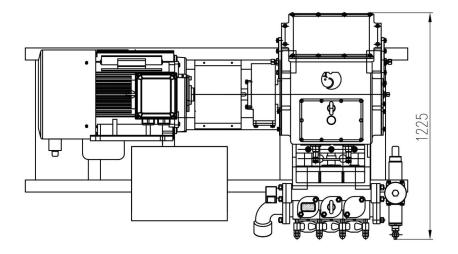



DXBH-800E




The DXBH-800E reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, which is driven by a permanent magnet synchronous motor and is highly efficient, energy-saving, and environmentally friendly. It is mainly used in conjunction with non-excavation drilling machines of about 65 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The flow rate and pressure adjustment range of this pump is large, and it can be remotely and infinitely speed-controlled through a controller. The flow rate and pressure changes can achieve constant power, which changes the traditional manual gear shift operation mode. This pump adopts a new concept and a new structure, which is compact in structure, beautiful in appearance, easy to install and maintain, and has a longer service life of vulnerable parts and stable performance.

Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	110
Cylinder diameter (mm)	110
Flow (L/min)	800 ~ 400
Pressure (MPa)	3.5 ~ 7
Input speed (r/min)	127~ 255
Input power(KW)	55
Dimensions (mm)	1248×863×895
Weight (kg)	990
Hydraulic motor model	YQW4-160Z
Hydraulic motor pressure (MPa)	55
Maximum motor flow (L/min)	1750/3500

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DXBH-800E Outline Dimension Drawing

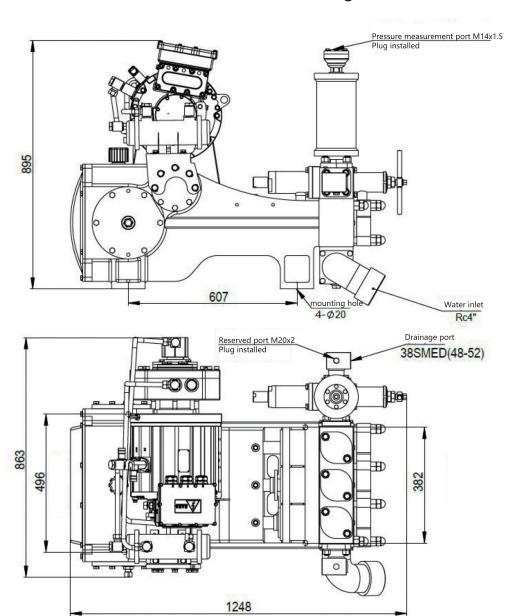



DBW-850/5S




The DBW-850/5S reciprocating pump is a horizontal triplex double-acting piston pump driven by an electric motor. It is primarily used for circulating flushing fluid in geological core drilling operations, as well as for other applications such as grouting, sewage discharge, and long-distance water delivery. This pump offers four flow rates and four pressure levels, with a wide range of adjustments to accommodate drilling and pull-back operations for different borehole diameters. The design incorporates modern concepts, utilizing new structures, materials, and manufacturing techniques. It features a compact structure, lightweight construction, small footprint, and aesthetically pleasing appearance. Installation and maintenance are convenient, and the pump boasts high output pressure, extended service life for wear-prone parts, and stable performance.


Stroke(mm)	110
Cylinder diameter(mm)	95
Pump speed(r/min)	203 145 103 74
Flow(L/min)	865 618 429 315.5
Pressure(Mpa)	1.8 2.5 3.5 5
Motor Power(Kw)	30
Maximum Suction Height(m)	2.5
Inlet Connection	Rc3
Outlet Connection	M42 × 2
Dimensions(mm)	2385 × 1096 × 1034
Weight(kg)	650
Motor Model	TYC32-1750-L160M12
Drive Connection Method	Motor + Pulley

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DBW-850/5S Outline Dimension Drawing

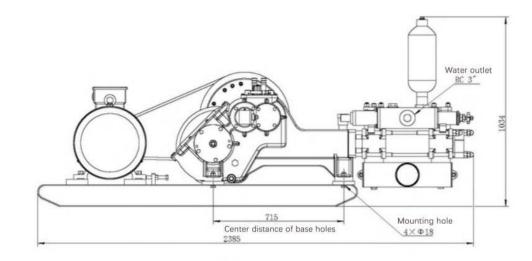

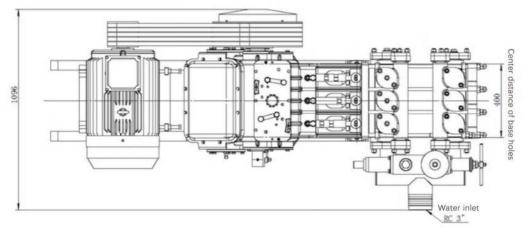



DBWH-1500




The DBWH-1500 reciprocating pump is a horizontal triplex single-acting piston pump driven by a permanent magnet synchronous motor, offering high efficiency, energy savings, and environmental friendliness. It is primarily designed for use with 150-ton trenchless drilling rigs but can also be employed for other applications such as grouting, mine drainage, and long-distance water delivery. This pump features a wide range of adjustable flow rates and pressures, enabling remote stepless speed regulation via a controller. The flow and pressure variations can maintain constant power output, replacing traditional manual gear-shifting operations. With innovative design concepts and a compact structure, the pump boasts an aesthetically pleasing appearance, easy installation and maintenance, extended service life for wear-prone parts, and stable performance.

Horizontal triplex recipro	cating single acting piston pump
Stroke(mm)	150
Cylinder diameter(mm)	140
Flow(L/min)	1500-465
Pressure(Mpa)	4-10
Rated power(Kw)	150
Dimensions(mm)	$2100 \times 2100 \times 1500$
Weight(kg)	3800
Power unit	Permanent Magnet Synchronous Motor
Transmission System	Parallel Shaft Gearbox
Control Method	Wireless and Wired Remote Control, Display Monitoring, Local Contro

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



DBWH-1500 Outline Dimension Drawing

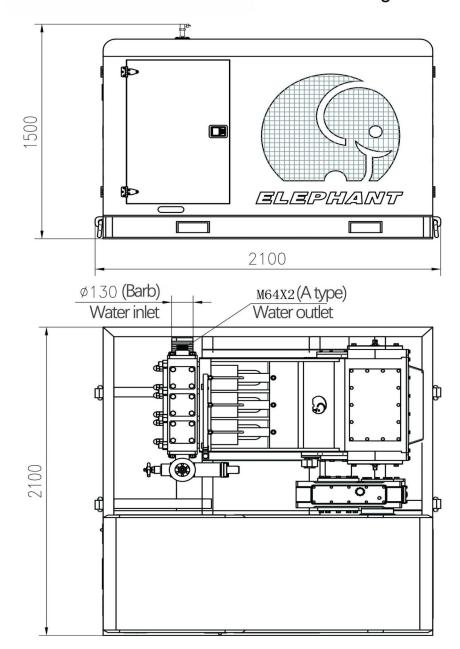



DBWH-3000






The DBWH-3000 reciprocating pump is a horizontal three-cylinder reciprocating single-acting piston pump, driven by a permanent magnet synchronous motor, which is highly efficient, energy-saving, and environmentally friendly. It is primarily used in conjunction with approximately 500-ton trenchless drilling rigs, and can also be utilized for other applications such as grouting, mine drainage, and long-distance water delivery. The pump offers a wide range of flow and pressure regulation, with remote stepless speed control via a controller, allowing for constant power output with changes in flow and pressure, thereby transforming the traditional manual gear-shifting operation mode. The pump incorporates new concepts and structures; it is compact in design, aesthetically pleasing, easy to install and maintain, with a longer lifespan for wear parts and stable performance.

Horizontal triplex reciprocati	ng single acting piston pump
Stroke (mm)	175
Cylinder diameter (mm)	200
Flow (L/min)	3000-1500
Pressure (MPa)	5–10
Rated power (KW)	300
Dimensions (mm)	2980 × 2300 × 1980
Weight (kg)	7200
Rated speed (r/min)	3500
Motor model	Permanent Magnet Synchronous Motor
Control mode	Wireless, wired remote control and
	display monitoring, local control



DBWH-3000 外形尺寸简图

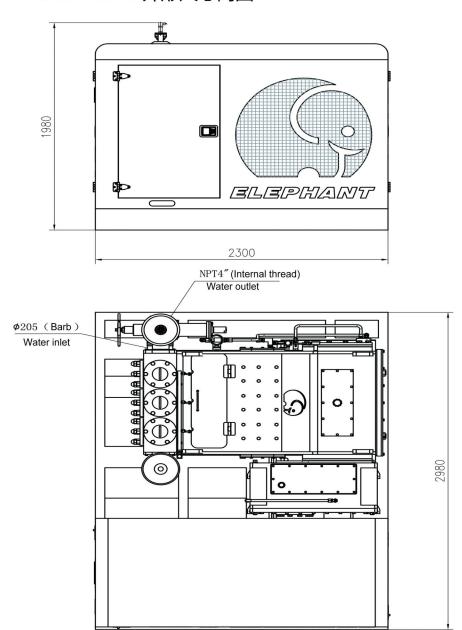

CBW-100Q






The CBW-100Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a single-cylinder diesel engine and transmitted through a reduction gearbox with a coupling. It is mainly used to convey flushing fluid into the borehole during geological core drilling, and can also be used for grouting, sewage discharge, and long-distance water delivery for other purposes. It can be used for drilling and backout with different diameters. The design adopts new concepts, new structures, new materials, and new processes; it is compact in structure, light in weight, small in size, and aesthetically pleasing; it is easy to install and maintain; and it has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	48
Cylinder diameter (mm)	55
Flow (L/min)	100
Pressure (MPa)	7
Input speed (r/min)	295
Input power (kw)	14
Dimensions (mm)	1345 × 990 × 700
Weight (kg)	415
Diesel engine model	ZS1115
Diesel Engine Power (KW)	16

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




CBW-100Q Outline Dimension Drawing

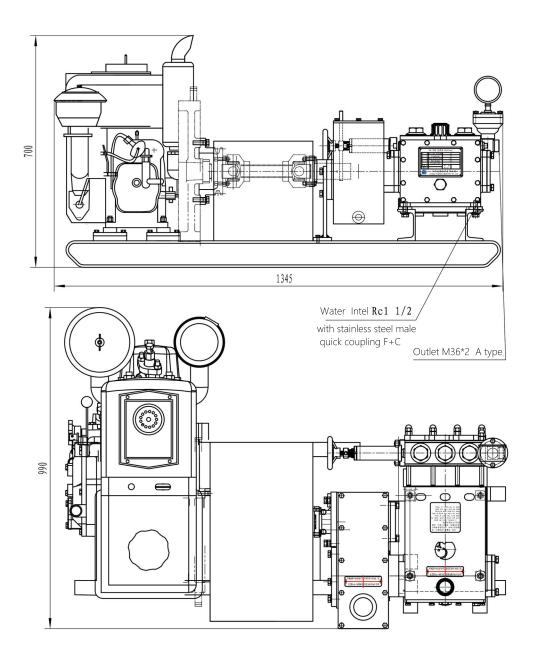



CBW-105Q



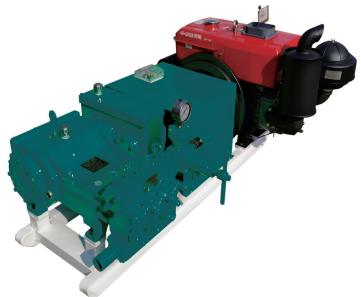


The CBW-105Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a single-cylinder diesel engine and transmitted through a coupling reducer. It is mainly used to deliver flushing fluid to the borehole during geological core drilling, and can also be used for grouting, sewage discharge, and long-distance water delivery in other applications. It can be adapted to different borehole diameters for drilling and backfilling. The design incorporates new concepts, new structures, new materials, and new processes; with compact structure, light weight, small size, and beautiful appearance; installation and maintenance are convenient; it has the characteristics of high output pressure, longer service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	60	
Cylinder diameter (mm)	50	
Flow (L/min)	105	
Pressure (MPa)	10	
Input speed (r/min)	300	
Input power (kw)	21	
Dimensions (mm)	1630 × 1040 × 800	
Weight (kg)	600	
Diesel engine model	L32	
Diesel Engine Power (KW)	23	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.




CBW-105Q Outline Dimension Drawing

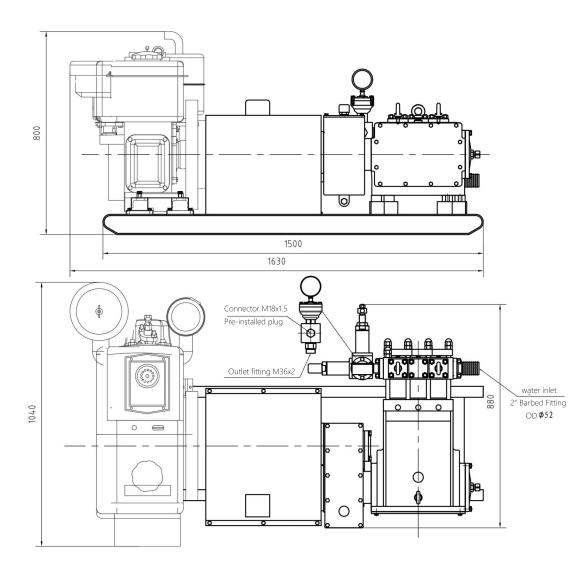



CBW-150Q

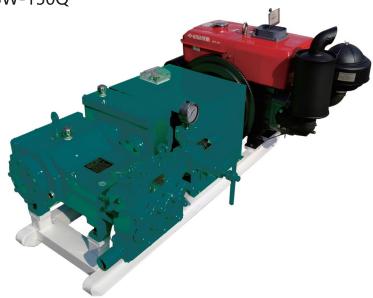


CBW-150Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a single-cylinder diesel engine and transmitted through a coupling reducer. It is mainly used to transport flushing fluid into the borehole during geological core drilling, and can also be used for other applications such as grouting, sewage discharge, and long-distance water delivery. It can be adapted to drilling and back-pulling of different diameters. In terms of design, new concepts, new structures, new materials, and new processes are adopted. The structure is compact, lightweight, small in size, and beautiful in appearance. It is easy to install and maintain, with high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	60	
Cylinder diameter (mm)	60	
Flow (L/min)	150	
Pressure (MPa)	7	
Input speed (r/min)	295	
Input power (kw)	21	
Dimensions (mm)	1630 × 1040 × 800	
Weight (kg)	600	
Diesel engine model	L32	
Diesel Engine Power (KW)	23	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-150Q Outline Dimension Drawing

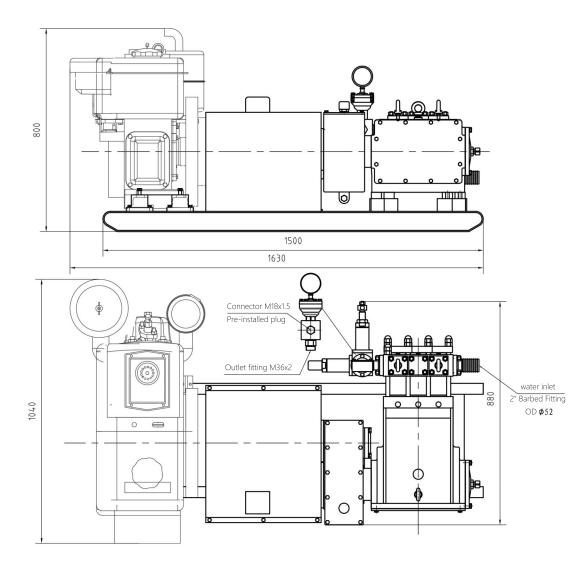



CBWF-250




The CBWF-250 reciprocating pump is a horizontal triplex single-acting piston pump, driven by a single-cylinder diesel engine with a pulley clutch transmission. It is primarily used for geological exploration, grouting, mine drainage, long-distance water delivery, and other applications. This pump offers four flow rates and four pressure levels, with a wide range of flow and pressure variations, making it suitable for drilling and pullback operations in different borehole sizes. The design incorporates modern concepts, utilizing new structures, materials, and manufacturing techniques. It features a compact structure, lightweight, small footprint, and aesthetically pleasing appearance. Additionally, it is easy to install and maintain, with advantages such as high output pressure, extended service life of wear-prone parts, and stable performance.


Horizontal triplex reciprocati	ng single actir	ng pisto	n pump	
Stroke(mm)	70			
Cylinder diameter(mm)		7	5	
Flow(L/min)	250	158	100	69
Pressure(Mpa)	2.5	4	6	9
Input speed(r/min)		72	27	
Rated power(Kw)		1	4	
Dimensions(mm)		1944×7	43×964	
Weight(kg)		60	00	
Diesel engine model		ZS1	115	
Diesel engine power(KW)		16	. 2	
Diesel engine rated speed(r/min)		22	00	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information



CBWF-250 Outline Dimension Drawing

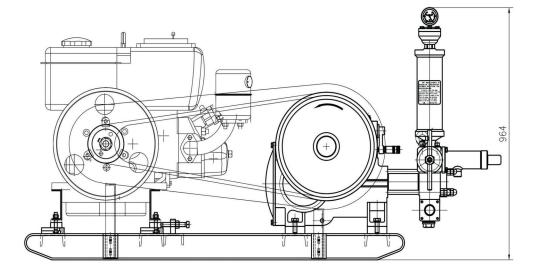

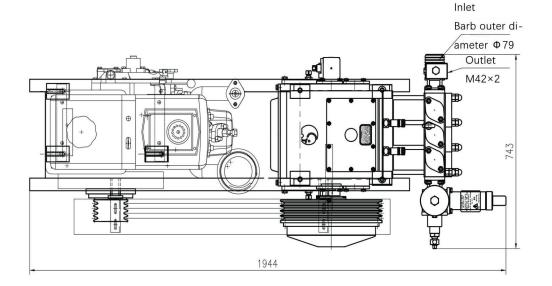



CBW-450/5A (Diesel engine power)




CBW-450/5A reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, which is driven by a single-cylinder diesel engine and belt-driven. It is mainly used for geological exploration, grouting, mine drainage, and long-distance water delivery. The pump has four flow rates and four pressures, with a wide range of flow and pressure changes, suitable for drilling and backwashing with different bore diameters. In design, new concepts, new structures, new materials, and new processes are widely used; the structure is compact, light in weight, small in size, and beautiful in appearance; installation and maintenance are convenient; it has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	110		
Cylinder diameter (mm)	95		
Flow (L/min)	450 320 230 160		
Pressure (MPa)	2 3 4 5		
Input speed (r/min)	490		
Dimensions (mm)	2320 × 1360 × 1300		
Weight (kg)	1100		
Diesel engine model	L32M		
Diesel Engine Power (KW)	23		
Rated speed (r/min)	2000		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-450/5A Outline Dimension Drawing

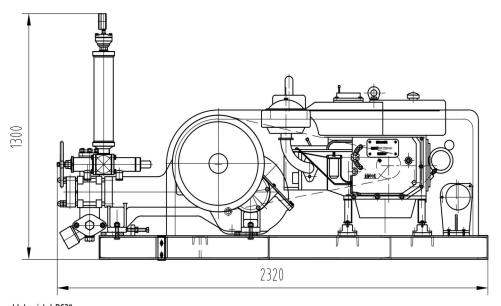

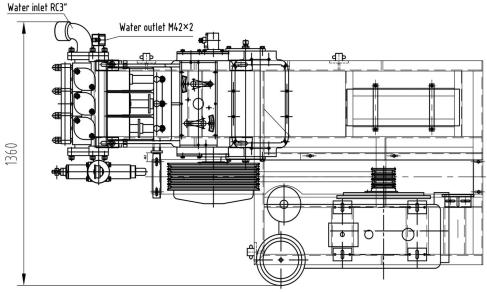



CBW-600 (Diesel engine power)




The CBW-600 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a diesel engine, using a reduction box to replace the traditional belt pulley transmission, and wireless remote pneumatic control clutch. It is mainly used in conjunction with non-excavation drilling rigs of about 70 tons, and can also be used for other injection grouting, mine drainage, and long-distance water delivery applications. The pump has four flow rates and four pressures, with a large range of flow and pressure changes, which can be suitable for drilling and backflushing of different diameters. In design, new concepts, structures, materials, and processes are adopted. The pump has a compact structure, light weight, small size, and beautiful appearance, making installation and maintenance convenient. It features high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	110		
Cylinder diameter (mm)	100		
Flow (L/min)	600 415 280 195		
Pressure (MPa)	3.5 5 7.5 10		
Input speed (r/min)	550		
Dimensions (mm)	2980 × 1320 × 1720		
Weight (kg)	2200		
Diesel engine model	4BTA3.9		
Diesel Engine Power (KW)	60		
Rated speed (r/min)	1500		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-600 Outline Dimension Drawing

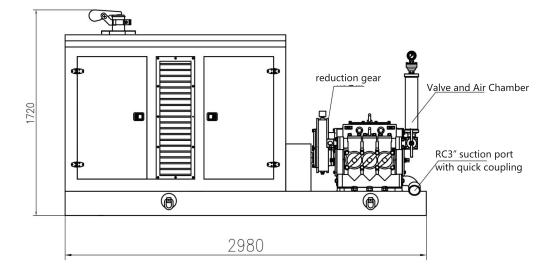

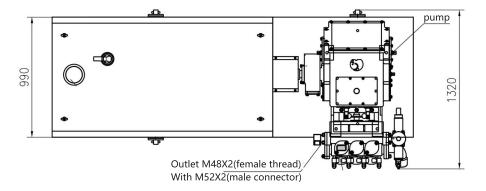



CBW-800 (Diesel engine power)






The CBW-800 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a diesel engine and using a gearbox instead of traditional belt wheel transmission. It has a wireless remote pneumatic control clutch. It is mainly designed to be used with non-excavation drilling rigs of around 90 tons, and can also be used for grouting, mine drainage and long-distance water delivery. The pump has four flow rates and four pressures, with a wide range of flow and pressure changes suitable for different hole drilling and backfilling. The design embodies new concepts and uses new structures, materials, and processes, with a compact structure, light weight, small size, and beautiful appearance. It is easy to install and maintain and has high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	135		
Cylinder diameter (mm)	110		
Flow (L/min)	800 550 370 260		
Pressure (MPa)	3.5 5 7.5 10		
Input speed (r/min)	55		
Dimensions (mm)	3000 × 1260 × 1850		
Weight (kg)	2420		
Diesel engine model	QSB3.9-P110		
Diesel Engine Power (KW)	79		
Rated speed (r/min)	1400		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-800 Outline Dimension Drawing

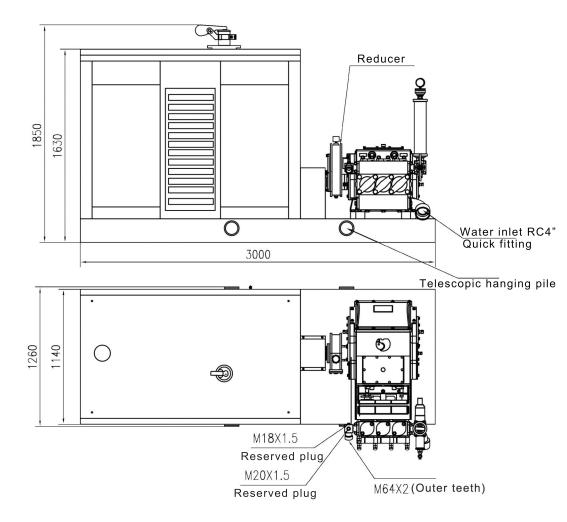



CBW-1000 (Diesel engine power)






The CBW-1000 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a diesel engine and using a gearbox instead of a traditional belt wheel transmission, with a wireless remote pneumatic control clutch. It is mainly used with non-excavation drilling rigs of around 100 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four different flow rates and four different pressures, with a wide range of flow rate and pressure changes, making it suitable for different borehole drilling and retreat. The design adopts new concepts, new structures, new materials, and new technologies, featuring a compact structure, light weight, small size, beautiful appearance, and convenient installation and maintenance. It also has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	150	
Cylinder diameter (mm)	115	
Flow (L/min)	1000 645 500 320	
Pressure (MPa)	4 6 8 11	
Input speed (r/min)	80	
Dimensions (mm)	3650 × 1811 × 1635	
Weight (kg)	3780	
Diesel engine model	QSB5.9-P130	
Diesel Engine Power (KW)	96	
Rated speed (r/min)	1500	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-1000 Outline Dimension Drawing

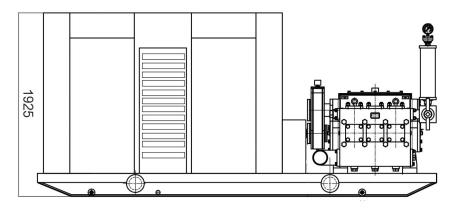

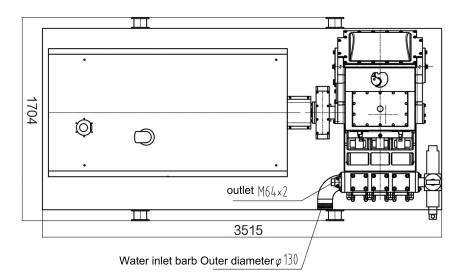



CBW-1200 (Diesel engine power)




CBW-1200 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump driven by a diesel engine, equipped with an automatic transmission and wireless remote control. It is mainly used in conjunction with non-excavation drilling rigs of around 150 tons, but can also be used for grouting, mine drainage, and long-distance water delivery in other applications. The pump has five flow rates and five pressures, with a wide range of flow and pressure changes that can accommodate different drill hole diameters and back pressures. In design, new concepts, structures, materials, and processes are adopted, with a compact structure, light weight, small size, and pleasing appearance. Installation and maintenance are convenient, and the pump features high output pressure, long service life for vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	150	
Cylinder diameter (mm)	120	
Flow (L/min)	1200 890 660 485 363	
Pressure (MPa)	4.5 6 8 10 12	
Input speed (r/min)	100	
Dimensions (mm)	3930 × 2096 × 1908	
Weight (kg)	4180	
Diesel engine model	QSB5.9-C180	
Diesel Engine Power (KW)	132	
Rated speed (r/min)	1800	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-1200 Outline Dimension Drawing

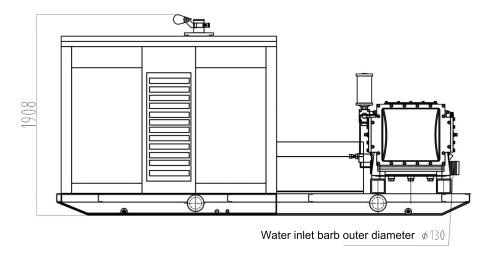

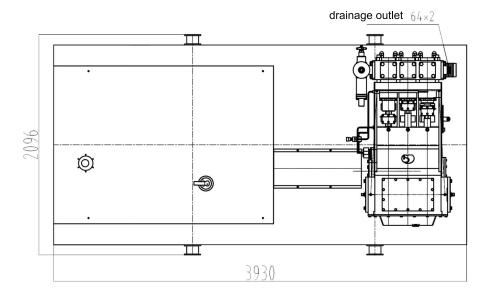



CBWH-1200 (Diesel engine power)




CBWH-1200 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by diesel engine and using a reduction gearbox to replace the traditional belt pulley transmission, with wireless remote pneumatic control clutch. It is mainly used in conjunction with non-excavation drilling rigs of about 150 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four flow rates and four pressures, with a wide range of flow and pressure changes, and can be used for drilling and backfilling with different diameters. The design adopts new concepts, new structures, new materials, and new processes; the structure is compact, lightweight, small in size, and beautiful in appearance; easy to install and maintain; it has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump			
Stroke (mm)	150		
Cylinder diameter (mm)	125		
Flow (L/min)	1200 779 60	00 385	
Pressure (MPa)	4 6 8	10	
Input speed (r/min)	96		
Dimensions (mm)	3715 × 1785 × 1925		
Weight (kg)	3700		
Diesel engine model	QSB5.9-P1	60	
Diesel Engine Power (KW)	120		
Rated speed (r/min)	1500		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBWH-1200 Outline Dimension Drawing

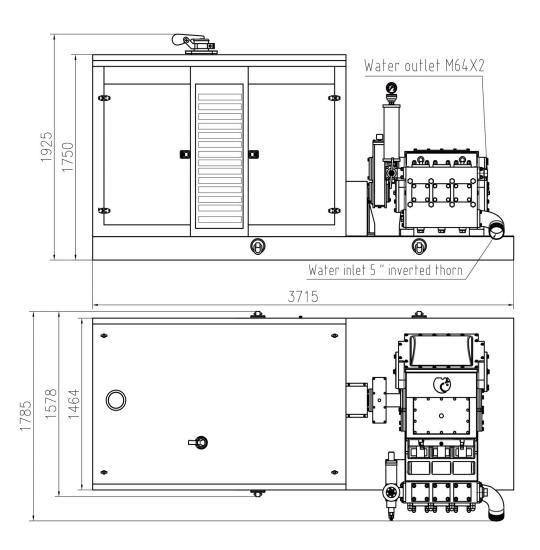



CBW-1500 (Diesel engine power)




The CBW-1500 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a diesel engine and equipped with an automatic transmission and wireless remote control. It is mainly used in conjunction with non-excavation drilling rigs weighing around 210 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water transportation. The pump has five flow rates and five pressures, with a wide range of flow and pressure changes, making it suitable for drilling and backfilling of different diameters. It adopts new ideas, new structures, new materials, and new processes in design; the structure is compact, light in weight, small in size, and aesthetically pleasing; installation and maintenance are convenient; and it features high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	150	
Cylinder diameter (mm)	135	
Flow (L/min)	1500 979 728 557 373	
Pressure (MPa)	5 7.5 10 13 15	
Input speed (r/min)	160	
Dimensions (mm)	4500 × 2096 × 2100	
Weight (kg)	5980	
Diesel engine model	QSC8.3-C260	
Diesel Engine Power (KW)	194	
Rated speed (r/min)	1700	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-1500 Outline Dimension Drawing

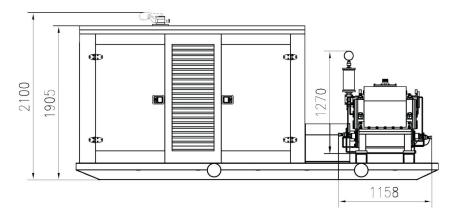

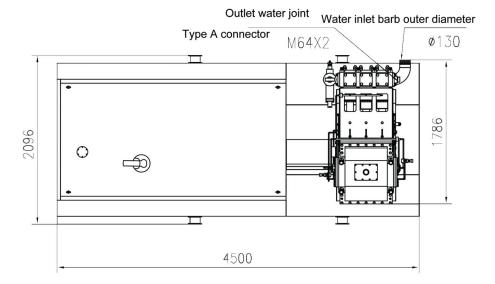



CBW-1500H




The CBW-1500H reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a diesel engine and equipped with an automatic gear-shifting transmission and wireless remote control. It is primarily designed for use with 210-ton horizontal directional drilling (HDD) rigs but can also be employed for other applications such as grouting, mine drainage, and long-distance water delivery. This pump offers five adjustable flow rates and five pressure levels, with a wide range of variations to accommodate different borehole diameters during drilling and pullback operations. Its design incorporates innovative concepts, utilizing advanced structures, materials, and manufacturing techniques. The pump features a compact structure, lightweight construction, small footprint, and aesthetically pleasing appearance. It is easy to install and maintain while delivering high output pressure, extended service life of wear-prone components, and stable performance.


Horizontal triplex recip	procating s	single acti	ng plung	er pump	
Stroke(mm)	150				
Plunger diameter(mm)			135		
Gear position	1	2	3	4	5
Pump speed(r/min)	61	91	119	160	246
Flow(L/min)	373	557	728	979	1500
Pressure(Mpa)	15	13	10	7.5	5
Input power(Kw)			160		
Maximum input torque(N·m)	4100				
Dimensions(mm)	4800×2100×2150				
Weight(kg)	6050				
Power unit	Cummins QSC8.3-C260 Diesel Engine				
Maximum power(Kw)	194				
Rated speed(r/min)			1700		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more informationg.



CBW-1500H Outline Dimension Drawing

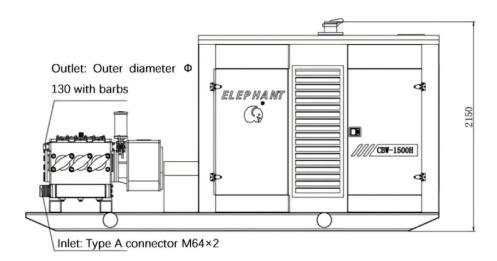

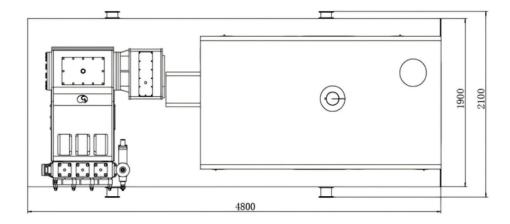



CBWH-1500 (Diesel engine power)




The CBWH-1500 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a diesel engine, equipped with automatic gear shifting and wire remote control. It is mainly used in conjunction with non-excavation drilling rigs of about 150 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has five flow rates and five pressures, with a wide range of flow and pressure changes, which can be used for drilling and backfilling with different aperture sizes. The design incorporates new concepts, new structures, new materials, and new processes; it has a compact structure, light weight, small size and beautiful appearance; it is easy to install and maintain; and it has the characteristics of high output pressure, long service life of vulnerable parts and stable performance.

Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	150	
Cylinder diameter(mm)	140	
Flow (L/min)	1500 1150 850 625 465	
Pressure (MPa)	4 5.5 7 9 10	
Rated power (kw)	120	
Dimensions (mm)	3987 × 2096 × 2000	
Weight (kg)	4500	
Diesel engine model	QSB5.9-C210	
Diesel Engine Power (KW)	154	
Rated speed (r/min)	1700	
T 1 2 27 2 12 11 1 1 1 1 1 1 1 1 1 1 1 1		


The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBWH-1500 Outline Dimension Drawing

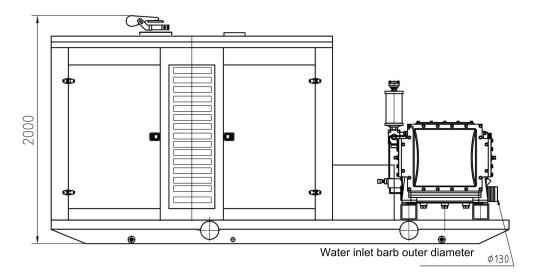

Outlet water joint

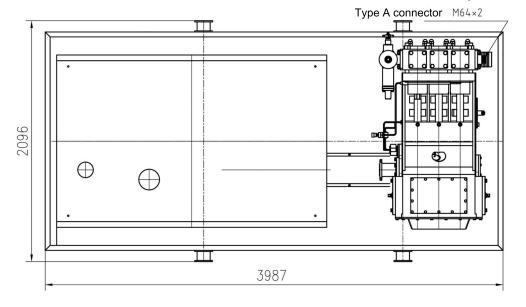



CBW-2000 (Diesel engine power)




CBW-2000 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by diesel engine and equipped with automatic shift gearbox and wireless remote control. It is mainly used in conjunction with non-excavating drilling rigs of about 220 tons, and can also be used for grouting, mine drainage, long-distance water delivery and other purposes. The pump has five flow rates and five pressures, with a wide range of flow rate and pressure changes, which can be suitable for drilling and backfilling of different aperture sizes. The design adopts new concepts, new structures, new materials, and new processes. It has a compact structure, light weight, small size, and beautiful appearance, and is easy to install and maintain. It has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocatir	ng single acti	ng pisto	n pum	р		
Stroke (mm)			150			
Cylinder diameter (mm)			155			
Flow (L/min)	2000	1500	1140	760	500	
Pressure (MPa)	4	5.4	7	9	10.5	
Input speed (r/min)			162			
Dimensions (mm)		4800 ×	2100 ×	2100		
Weight (kg)			6050			
Diesel engine model		QSC	08.3-C2	260		
Diesel Engine Power (kw)			194			
Rated speed (r/min)			1700			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-2000 Outline Dimension Drawing

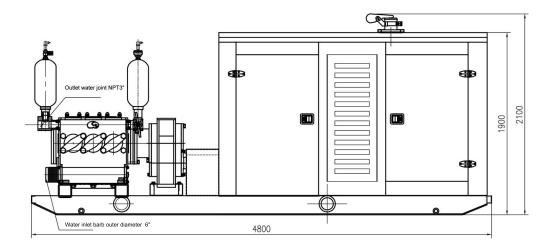

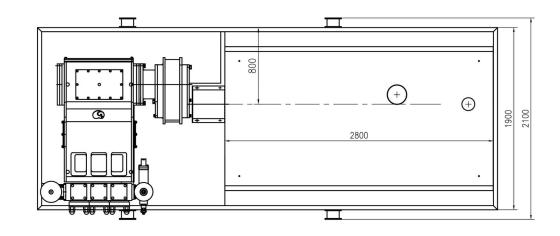



CBWH-2000 (Diesel engine power)






The CBWH-2000 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump that is powered by a diesel engine and equipped with an automatic transmission gearbox and wireless remote control. It is mainly used to complement non-excavation drilling rigs weighing around 220 tons, but can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has five flow and pressure settings with a wide range of variations, which can accommodate different drill and backflow hole sizes. In design, new concepts, structures, materials, and techniques are adopted to make the pump compact, lightweight, small in size, and aesthetically pleasing. Installation and maintenance are convenient, and the pump features high output pressure, long-lasting vulnerable parts, and stable performance.


Horizontal triplex reciprocati	ng single actir	ng pisto	n pum)		
Stroke (mm)			150			
Cylinder diameter (mm)			165			
Flow (L/min)	2000	1500	1140	760	500	
Pressure (MPa)	4	5.4	7	10	10	
Rated speed (r/min)			162			
Dimensions (mm)		4800 ×	2100 ×	2100		
Weight (kg)			6050			
Diesel engine model		QSC	08.3-C2	260		
Diesel Engine Power (kW)			194			
Rated speed (r/min)			1500			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBWH-2000 Outline Dimension Drawing

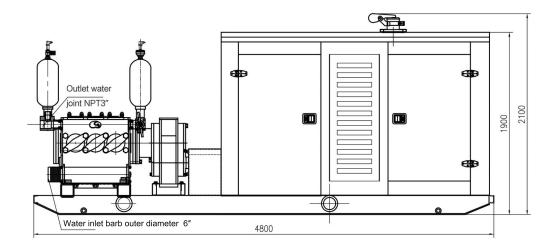

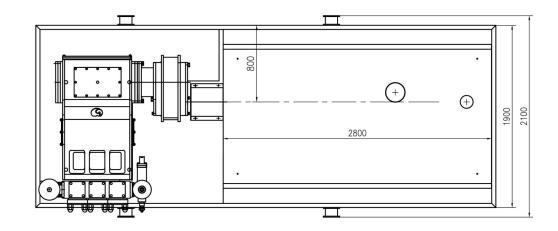



CBW-2200 (Diesel engine power)




The CBW-2200 reciprocating pump is a horizontal triplex single-acting reciprocating plunger pump driven by a diesel engine, equipped with an automatic transmission, wireless remote control, primarily used in conjunction with non-excavation drilling machines of about 300 tons. It can also be used for other purposes such as grouting, mine drainage, long-distance water delivery, etc. The pump has six flow rates and six pressures, with a wide range of flow and pressure changes to adapt to different drill bit diameters and backflow. Its design incorporates new concepts, new structures, new materials, and new processes, with a compact structure, light weight, small size, and attractive appearance. It is easy to install and maintain, with high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocati	ing sir	ngle ac	ting pi	ston pu	ımp		
Stroke (mm)				200			
Cylinder diameter (mm)				140			
Flow (L/min)		2200	1700	1200	900	650	500
Pressure (MPa)		5	6.5	9	12	17	20
Input speed (r/min)				220			
Dimensions (mm)			5310	0×2300	0×248	80	
Weight (kg)				1250	0		
Diesel engine model			YC	6MK42	0-T30)	
Diesel Engine Power (KW)				281			
Rated speed (r/min)				1800)		

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-2200 Outline Dimension Drawing

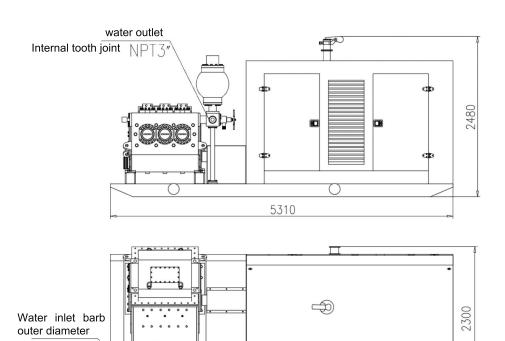



CBW-2500 (Diesel engine power)




The CBW-2500 reciprocating pump is a horizontal, triplex, single-action reciprocating plunger pump that is powered by a diesel engine and has an automatic transmission gearbox and wireless remote control. It is mainly used in conjunction with non-excavation drilling rigs of around 350 tons, but can also be used for other purposes such as grouting, mine drainage, and long-distance water transfer. The pump has six flow rates and six pressures with a wide range of variation, making it suitable for different drilling diameters and backflushing. It employs new concepts, structures, materials, and processes in its design, making it compact, lightweight, and aesthetically pleasing. It is easy to install and maintain, has a high output pressure, a long service life for vulnerable parts, and stable performance.

ng single acting piston pump						
200						
140						
2500 1845 1330 990 730 539						
4.6 6 8 11 15 19						
230						
5310×2300×2480						
12900						
QSZ13-C400						
298						
1800						

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-2500 Outline Dimension Drawing

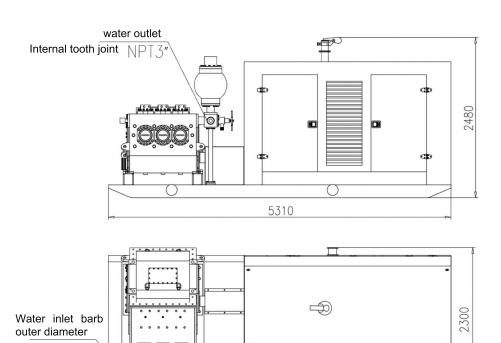



CBWH-2500 (Diesel engine power)




The CBWH-2500 reciprocating pump is a horizontal tripex reciprocal single-acting piston pump, which is driven by a diesel engine and equipped with an automatic transmission, remote wireless control. It is mainly used in conjunction with non-excavation drilling rigs of about 400 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has five flow rates and five pressures, with a wide range of changes in flow rate and pressure, making it suitable for drilling and back dragging of different hole diameters. In its design, new concepts, structures, materials, and processes are used to make it compact, lightweight, small in size, aesthetically appealing, and easy to install and maintain. It features high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocat	ting single acting piston pump						
Stroke (mm)	160						
Cylinder diameter (mm)	190						
Flow (L/min)	2500 1809 1346 989 734						
Pressure (MPa)	5 6 7 8 10						
Rated power (kw)	250						
Dimensions (mm)	5615 × 2150 × 2350						
Weight (kg)	9500						
Diesel engine model	QSM11-P476						
Diesel Engine Power (KW)	330						
Rated speed (r/min)	1500						

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBWH-2500 Outline Dimension Drawing

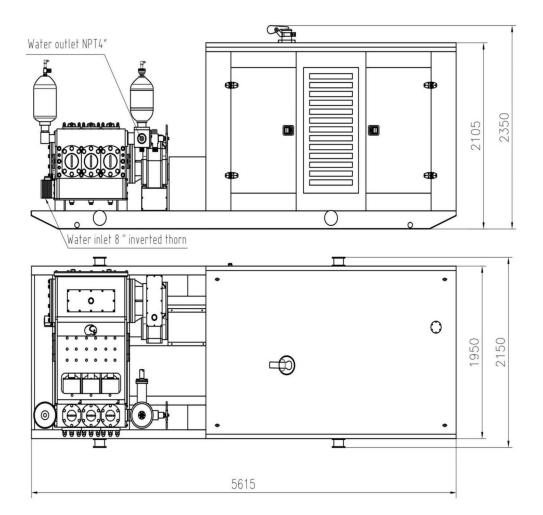



CBW-2800 (Diesel engine power)




The CBW-2800 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a diesel engine, equipped with an automatic transmission and wireless remote control. It is mainly used for matching with non-excavation drilling rigs of around 500 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has five flow rates and five pressure settings, with a wide range of flow and pressure changes, and can be used for drilling and recovery of different diameters. It adopts new concepts, new structures, new materials, and new technologies in its design, with a compact structure, light weight, small size, and beautiful appearance. It is easy to install and maintain, with high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocati	ng single acti	ng pisto	n pum	р		
Stroke (mm)			190			
Cylinder diameter (mm)			160			
Flow (L/min)	2800	2029	1504	1105	760	
Pressure (MPa)	5	7	9	12	18	
Input speed (r/min)			320			
Dimensions (mm)		6050 ×	3020 ×	2570		
Weight (kg)			16000			
Diesel engine model		QS:	Z13-C5	50		
Diesel Engine Power (KW)			410			
Rated speed (r/min)			1850			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-2800 Outline Dimension Drawing

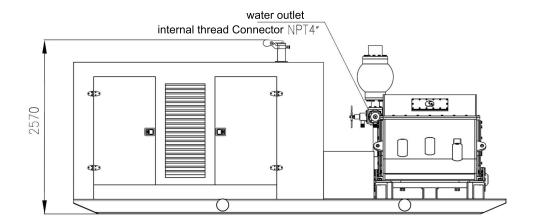

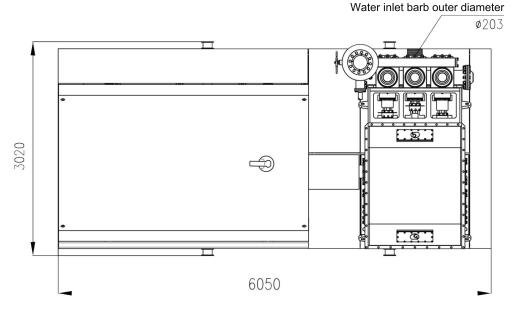



CBWH-3000 (Diesel engine power)




The CBWH-3000 reciprocating pump is a horizontal, triplex, single-acting piston pump that is driven by a diesel engine and equipped with an automatic transmission and wireless remote control. It is mainly used in conjunction with non-excavation drilling machines weighing around 500 tons, as well as for other purposes such as injection grouting, mine discharge, and long-distance water delivery. The pump has five flow rates and five pressures, with a wide range of flow and pressure variations that can be adapted to different borehole diameters for drilling and backfilling. The design incorporates new concepts, new structures, new materials, and new processes; it has a compact structure, light weight, small size, and attractive appearance, as well as easy installation and maintenance. The pump also features high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocati	ng single acting piston pump
Stroke (mm)	175
Cylinder diameter (mm)	200
Flow (L/min)	3000 2452 1818 1340 818
Pressure (MPa)	5 6 8 10 10
Rated power (kw)	320
Dimensions (mm)	5980 × 2390 × 2450
Weight (kg)	11000
Diesel engine model	QSZ13-C550
Diesel Engine Power (KW)	410
Rated speed (r/min)	1500

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBWH-3000 Outline Dimension Drawing

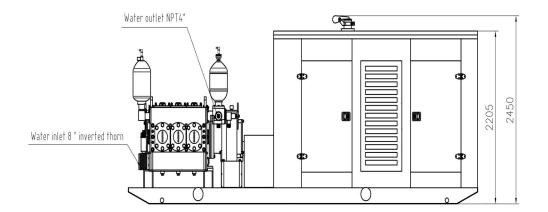

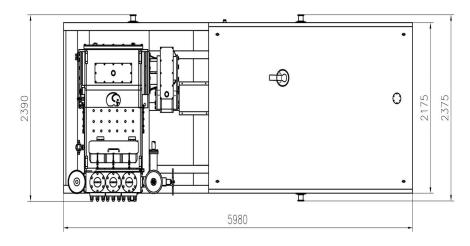



CBW-3200



The CBW-3200 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a diesel engine and equipped with an automatic gear-shifting transmission and wireless remote control. It is primarily designed for use with 500-ton trenchless drilling rigs but can also be employed for other applications such as grouting, mine drainage, and long-distance water delivery. This pump offers five flow rates and five pressure levels, with a wide range of adjustments to accommodate different borehole diameters during drilling and pipe pulling. Its design incorporates innovative concepts, utilizing new structures, materials, and manufacturing techniques. The pump features a compact structure, lightweight construction, small footprint, and aesthetically pleasing appearance. It is easy to install and maintain, while delivering high output pressure, extended service life for wear-prone components, and stable performance.

Horizontal triplex r	eciprocat	ing single	acting pist	ton pump			
Stroke(mm)		200					
Plunger diameter(mm)			170				
Gear diameter	1	2	3	4	5		
Pump speed(r/min)	65	95	129	174	236		
Flow(L/min)	885	1293	1752	2364	3200		
Pressure(Mpa)	12	10	8	6	4.8		
Rated power(Kw)	320						
Maximum input torque(N·m)			10800				
Dimensions(mm)		612	20×2790×2	450			
Weight(kg)			13000				
Power unit	Cui	mmins QSZ1	L3-C550-30	Diesel Eng	ine		
Maximum power(Kw)			410				
Rated speed(r/min)			1900				

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.



CBW-3200 Outline Dimension Drawing

