

Disclaimer:

Due to continuous technological updates, materials and technical specifications are subject to change without notice. The actual product supply status shall be subject to the sales contract. Samples are for reference only.

Elephant Machinery CO.,LTD.

No. 58, Guanhua West Road, Jianhu County, Yancheng City, Jiangsu Province
0515-80603039

Room 909, Building 4, Yuhua Living Room, No. 109, Software Avenue, Yuhuatai District, Nanjing City, Jiangsu Province
025-52891797

www.c-emc.com



WeChat Official Account

Version Number: 202407



ELEPHANT

Reciprocating Pumps

Mud Pump Series

Convenient · Reliable · Efficient · Intelligent

Contents


Hydraulic Motor Drive

BW-75Q	03-04	DXBH-200	39-40
BW-100	05-06	DXBH-200/7	41-42
BW-100Q	07-08	DXBH-300	43-44
BW-105Q	09-10	DXB-300/8	45-46
BW-150Q	11-12	DXBH-300Y	47-48
BW-160	13-14	DXB-330/10	49-50
BW-180	15-16	DXBH-400	51-52
BWF-250	17-18	DXB-500	53-54
BW-320	19-20	DXB-500/10	55-56
BWF-320	21-22	DXB-600	57-58
BW-400	23-24	DXBH-600	59-60
BWF-400	25-26	DXB-800	61-62
BW-450	27-28	DXBH-800	63-64
BWF-450	29-30	DXBH-1000Y	65-66
BW-600	31-32	DXBH-1200	67-68
BW-800	33-34	DXBH-1200Y	69-70
BW-1000	35-36		
YBW-1200	37-38		



Electric Motor Drive

DBW-100	71-72
DBW-100Q	73-74
DBW-100QP	75-76
DBW-160	77-78
DXBH-200E	79-80
DBW-250	81-82
DBWF-250	83-84
DXBH-300EQ	85-86
DBW-320	87-88
DXBH-400E	89-90
DBW-600	91-92
DXBH-600E	93-94
DBW-800	95-96
DXBH-800E	97-98
DBW-850/5S	99-100
DBW-1000	101-102
DBW-1200	103-104
DBWH-1500	105-106
DBWH-3000	107-108



Diesel Engine Drive

CBW-100Q	109-110
CBW-105Q	111-112
CBW-150Q	113-114
CBWF-250	115-116
CBW-450/5A	117-118
CBW-600	119-120
CBW-800	121-122
CBW-1000	123-124
CBW-1200	125-126
CBWH-1200	127-128
CBW-1500	129-130
CBW-1500H	131-132
CBWH-1500	133-134
CBW-2000	135-136
CBWH-2000	137-138
CBW-2200	139-140
CBW-2500	141-142
CBWH-2500	143-144
CBW-2800	145-146
CBWH-3000	147-148
CBW-3200	149-150
CBWH-3500	151-152




Company Profile

Elephant Machinery Co., Ltd. (hereinafter referred to as Elephant Machinery), founded in 2008 and covering an area of 20,000 square meters, is a comprehensive enterprise integrating the R&D, manufacturing, sales, and service of reciprocating pumps across all application fields. The company holds multiple invention patents and has obtained certifications including API Q1 Quality Management System, ISO 9001 Quality Management System, ISO 14001 Environmental Management System, Enterprise Intellectual Property Management System, Enterprise Integrity Management System, After-Sales Service Evaluation System, Green Factory, Five-Star Green Supply Chain Rating, AAA Corporate Credit Evaluation, and EU CE Certification. It has been recognized as a National High-Tech Enterprise, Jiangsu Provincial "Specialized and Sophisticated" Enterprise, and Jiangsu Provincial Advanced-Level Intelligent Factory.

Elephant Machinery specializes in the production of reciprocating plunger pumps, piston pumps, and diaphragm pumps, with designs and manufacturing processes conforming to Chinese national standards GB/T9234-2018 and GB/T7784-2018, as well as international standards API 674, API 675, and ISO 13710:2004, covering flow and pressure requirements across a wide range of applications. Our products are suitable for industries including oilfield water injection and pressurization, chemical media transfer, pharmaceutical precise metering, trenchless directional drilling, mining and geothermal drilling, coal mine fracturing and grouting, environmental wastewater treatment, high pressure water jetting, and food and beverage processing, delivering stable and reliable performance.

Elephant Machinery's products mainly consist of three series: plunger pumps, piston pumps, and diaphragm pumps, with power configurations including hydraulic motors, electric motors, and diesel engines. By adopting new technologies, new materials, and new processes, combined with advanced machining and testing equipment, our products feature compact structure, light weight, small footprint, appealing appearance, stable performance, long service life of wearing parts, and easy installation and maintenance.

BW-75Q (Hydraulic Motor Driven)

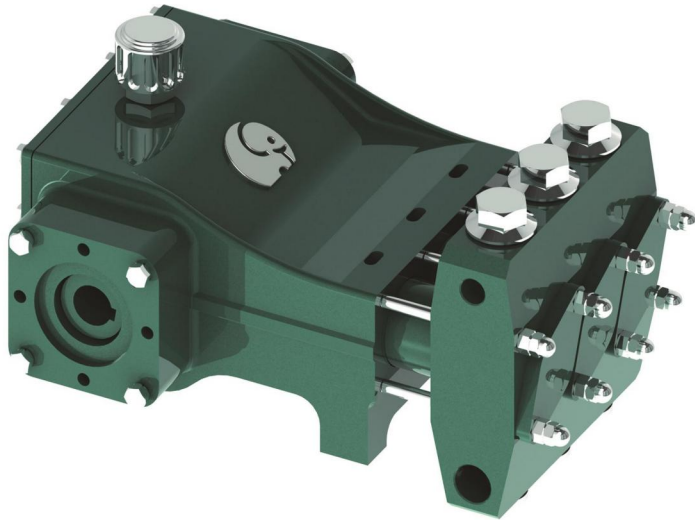


The BW-100Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a hydraulic motor. It is mainly used for portable rock core drilling machines and can also be used for other applications such as grouting, mine drainage, and long-distance water transportation. The pump can adjust speeds infinitely with the hydraulic motor, making it suitable for drilling and backwashing of different diameters. In its design, new concepts, structures, materials, and processes have been used, resulting in a compact structure, light weight, small volume, and attractive appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are highly serialized and standardized, making installation and maintenance more convenient. The pump has a long service life for wearing parts and high reliability.


Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	40
Cylinder diameter (mm)	50
Flow (L/min)	75
Pressure (MPa)	6
Input speed (r/min)	320
Input power (KW)	9
Dimensions (mm)	461×517×254
Weight (kg)	72
Hydraulic motor model	2K604-0043
Hydraulic motor pressure (MPa)	17
Maximum motor flow (L/min)	45

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-75Q Outline Dimension Drawing

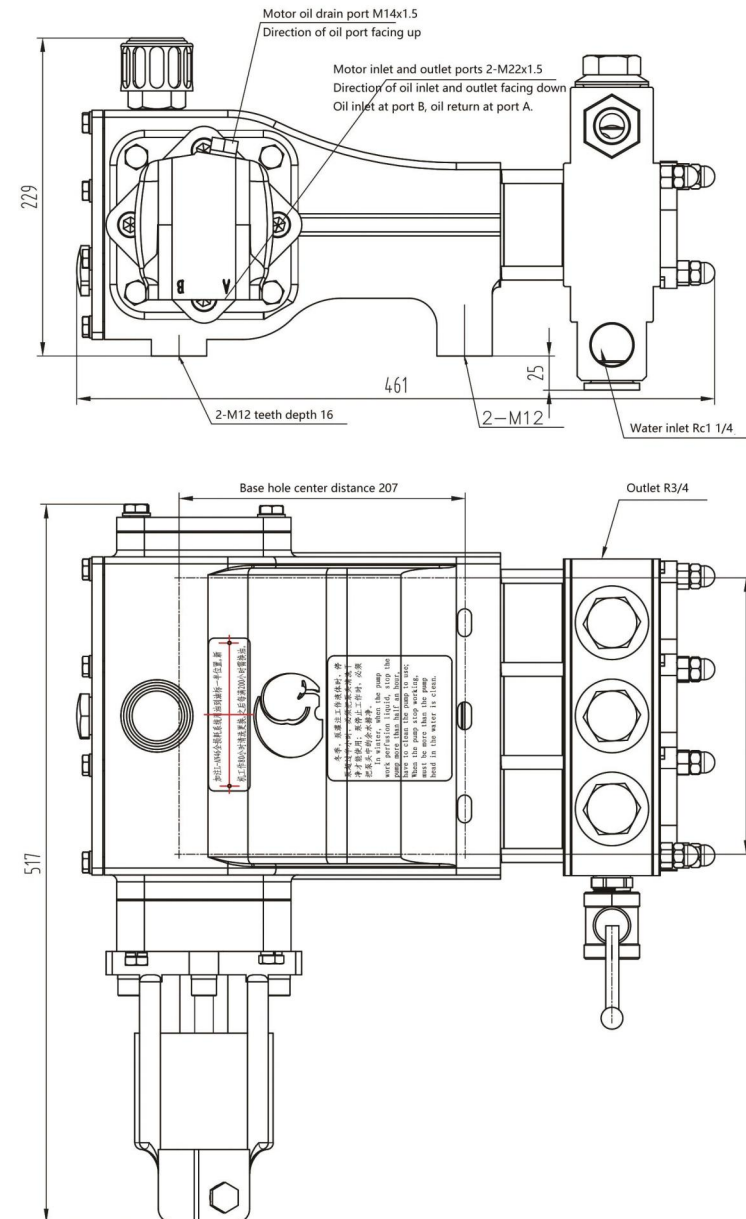

BW-100 (Hydraulic Motor Driven)


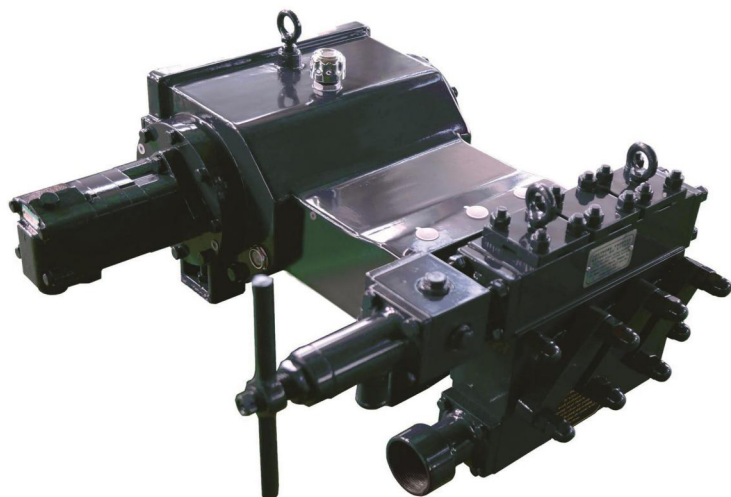


The BW-100 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines of around 10 tons, and can also be used for grouting, mine drainage, long-distance water delivery, and other purposes. The pump can achieve stepless speed regulation through the hydraulic motor, and is suitable for drilling and backhaul with different bore diameters. The design concept features new structures, materials, and processes, resulting in a compact structure, light weight, small size, and attractive appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are standardized and universal, which facilitates installation and maintenance. The service life of vulnerable components is long, and the reliability is high.


Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)		60
Cylinder diameter (mm)		55
Flow (L/min)		100
Pressure (MPa)		7
Input speed (r/min)		240
Input power (KW)		14
Dimensions (mm)		690 × 641 × 350
Weight (kg)		175
Hydraulic motor model		2K604-0046
Hydraulic motor pressure (MPa)		17
Maximum motor flow (L/min)		65

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-100 Outline Dimension Drawing

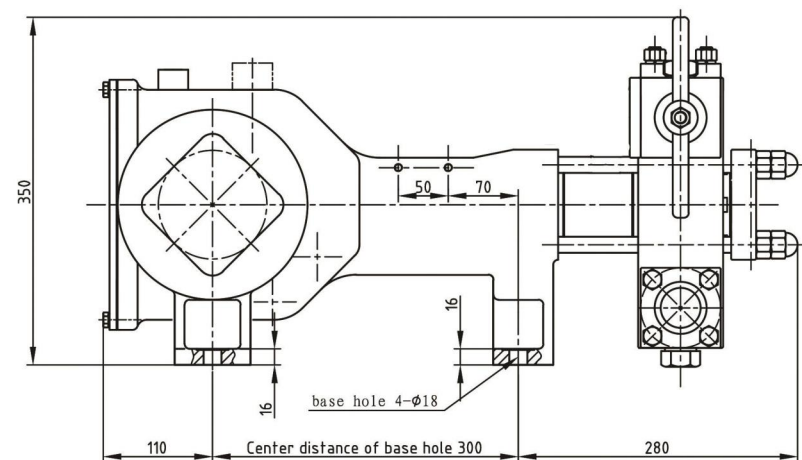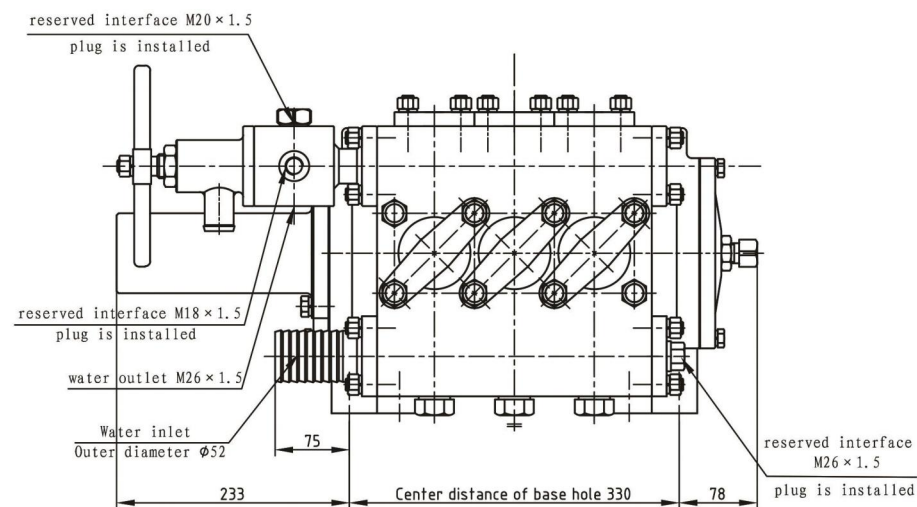

BW-100Q (Hydraulic Motor Driven)

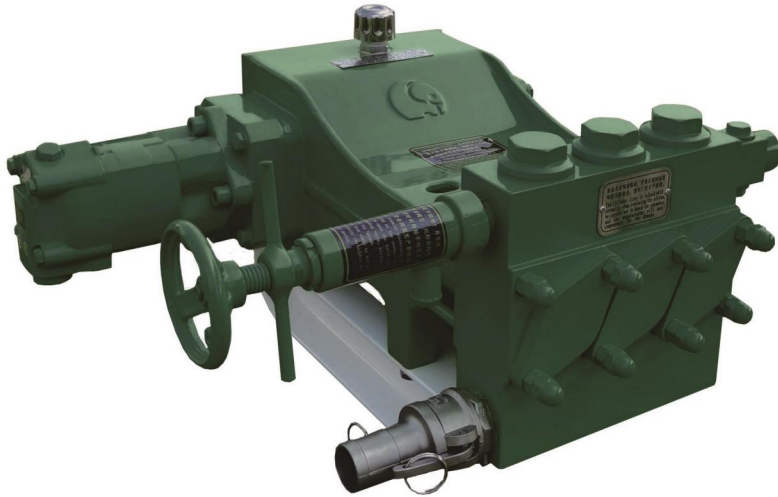


The BW-100Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump that is hydraulically driven. It is mainly used in conjunction with non-excavation drilling machines of about 10 tons, but can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump can be adapted to different drill hole diameters and backhaul by continuously variable speed through the hydraulic motor. The design incorporates new concepts, new structures, new materials, and new processes. The pump has a compact structure, light weight, small size, and a beautiful appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are as much as possible standardized and universal, making installation and maintenance convenient. The life of vulnerable parts is long and the reliability is high.


Horizontal triplex reciprocating single acting piston pump	
Stroke (mm)	48
Cylinder diameter (mm)	55
Flow (L/min)	100
Pressure (MPa)	7
Input speed (r/min)	295
Input power (KW)	13
Dimensions (mm)	545 × 532 × 285
Weight (kg)	90
Hydraulic motor model	2K604-0045
Hydraulic motor pressure (MPa)	17
Maximum motor flow (L/min)	58

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-100Q Outline Dimension Drawing

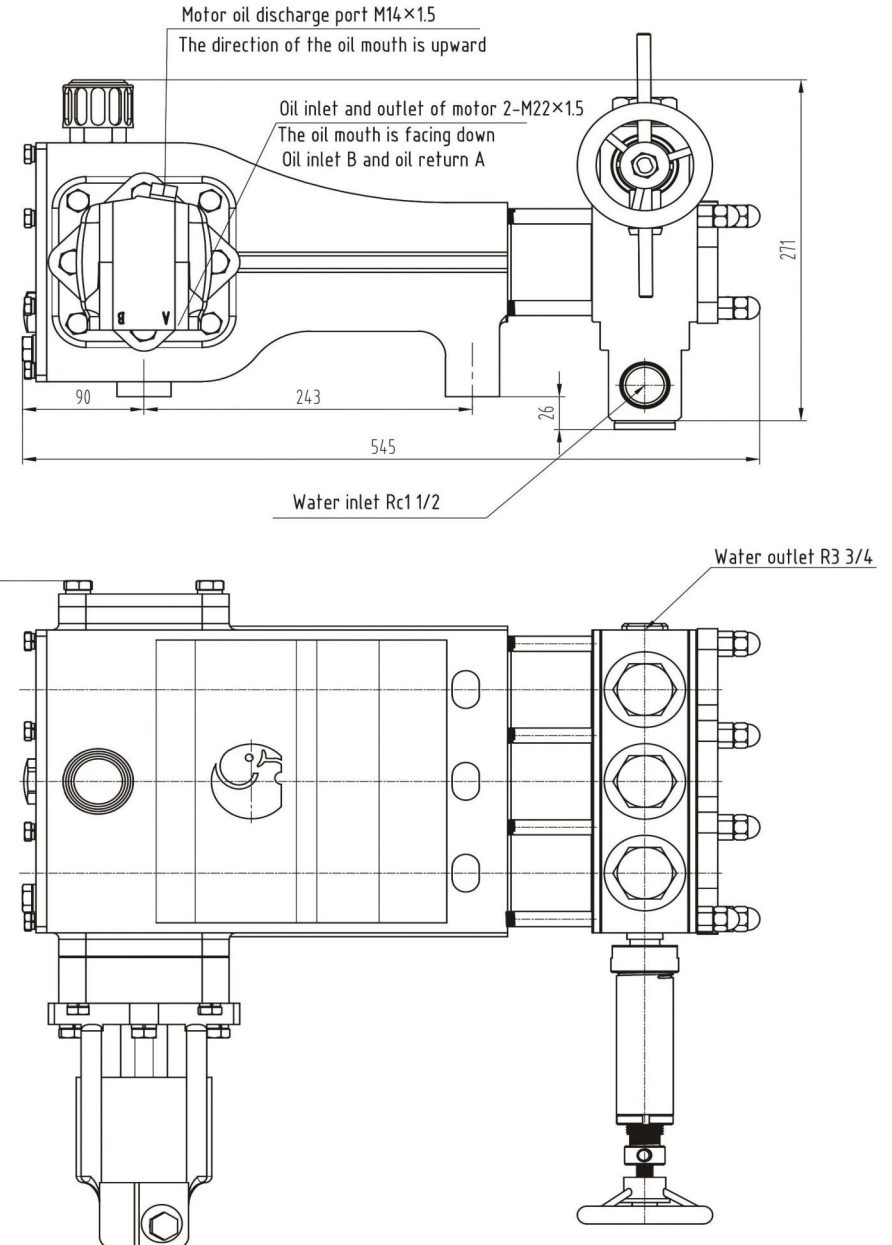

BW-105Q

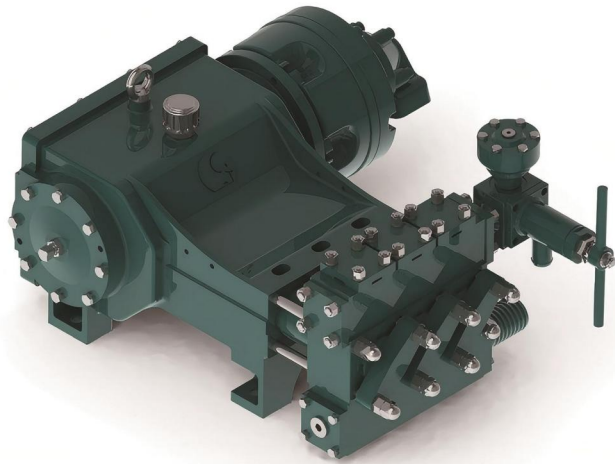


The BW-105Q reciprocating pump is a horizontal triplex single-acting piston pump driven by a hydraulic motor. Primarily designed for use with approximately 12-ton trenchless drilling rigs, it can also serve other applications such as grouting, mine drainage, long-distance water delivery, and geological exploration. Featuring stepless speed regulation via the hydraulic motor, this pump accommodates drilling and back-hauling operations across various borehole diameters. Its design incorporates innovative concepts, utilizing new structures, materials, and manufacturing techniques. The pump boasts a compact structure, lightweight construction, small footprint, and aesthetically pleasing appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are standardized and interchangeable for easy installation and maintenance. Wear parts exhibit extended service life and high reliability.


Horizontal triplex reciprocating single acting piston pump	
Stroke(mm)	60
Cylinder diameter(mm)	50
Pump speed(r/min)	300
Flow(L/min)	105
Pressure(Mpa)	10
Input power(kw)	20.2
Dimensions(mm)	745 × 682 × 377
Weight(kg)	175
Motor model	1-250
Hydraulic motor pressure(Mpa)	20
Maximum motor flow(L/min)	80

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-105Q Outline Dimension Drawing

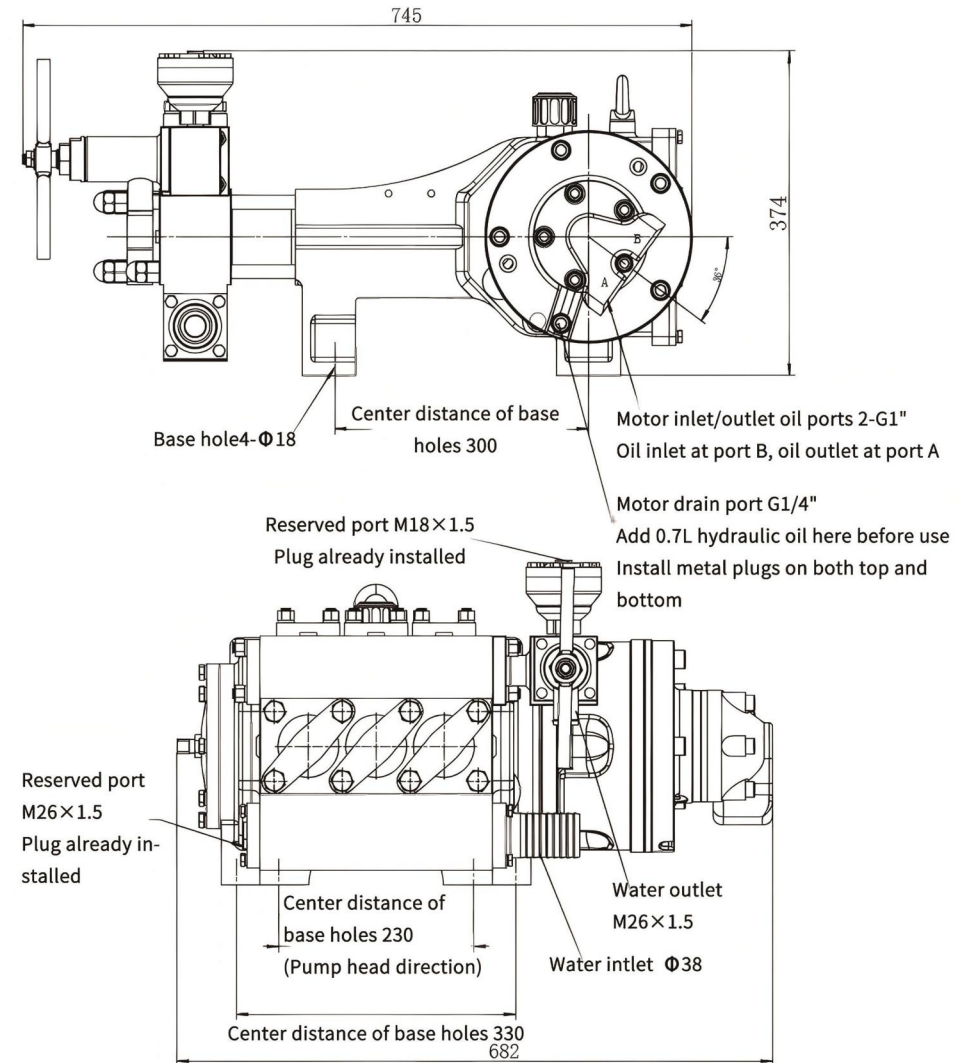

BW-150Q (Hydraulic Motor Driven)


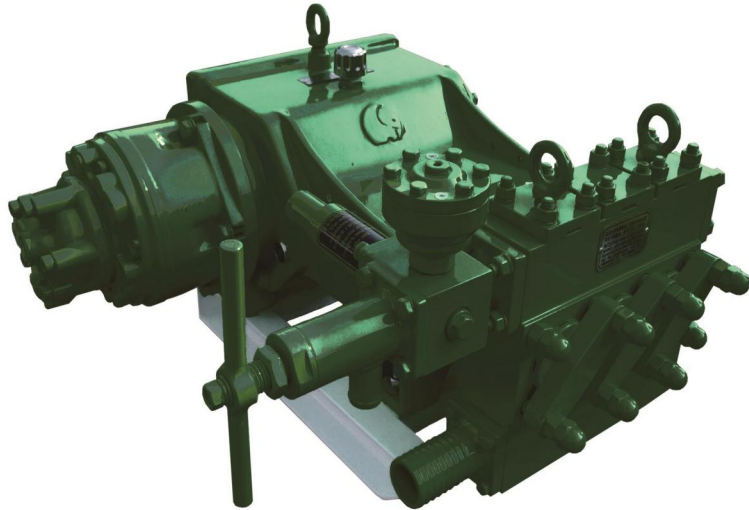


The BW-150Q reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a hydraulic motor. It is mainly used with non-excavation drilling rigs of around 12 tons, and can also be used for other purposes such as injection, mine drainage, long-distance water transfer, and geological exploration. The pump can be infinitely adjusted with a hydraulic motor to adapt to different drilling diameters and backfilling. The design adopts new concepts, new structures, new materials, and new processes, with compact structure, light weight, small size, and beautiful appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are as standardized and universal as possible for easy installation and maintenance. The service life of vulnerable parts is long and the reliability is high.

Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)		60
Cylinder diameter (mm)		60
Flow (L/min)		150
Pressure (MPa)		7
Input speed (r/min)		295
Input power (KW)		21
Dimensions (mm)		702 × 682 × 374
Weight (kg)		200
Hydraulic motor model		1-250
Hydraulic motor pressure (MPa)		20
Maximum motor flow (L/min)		75

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-150Q Outline Dimension Drawing

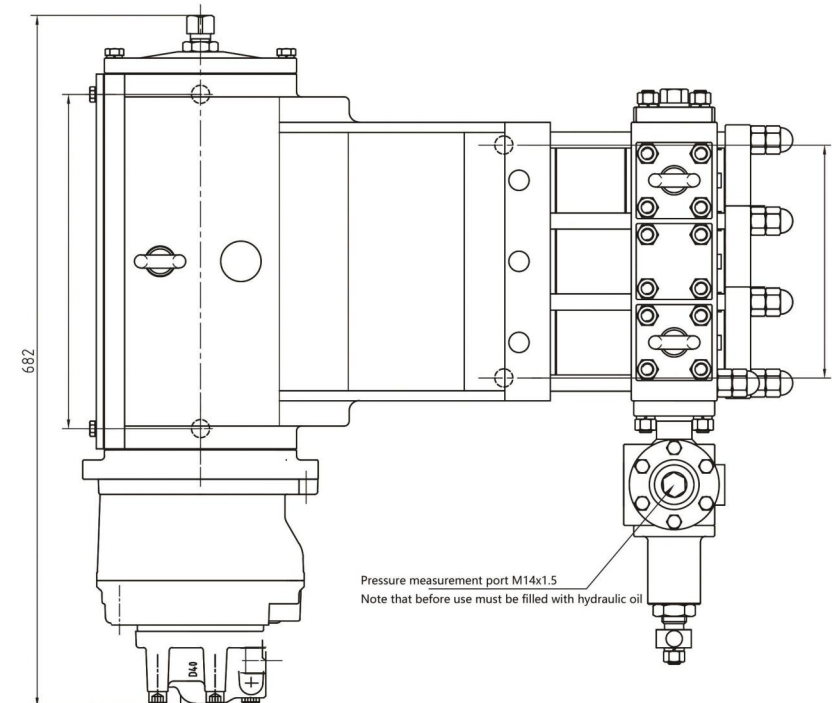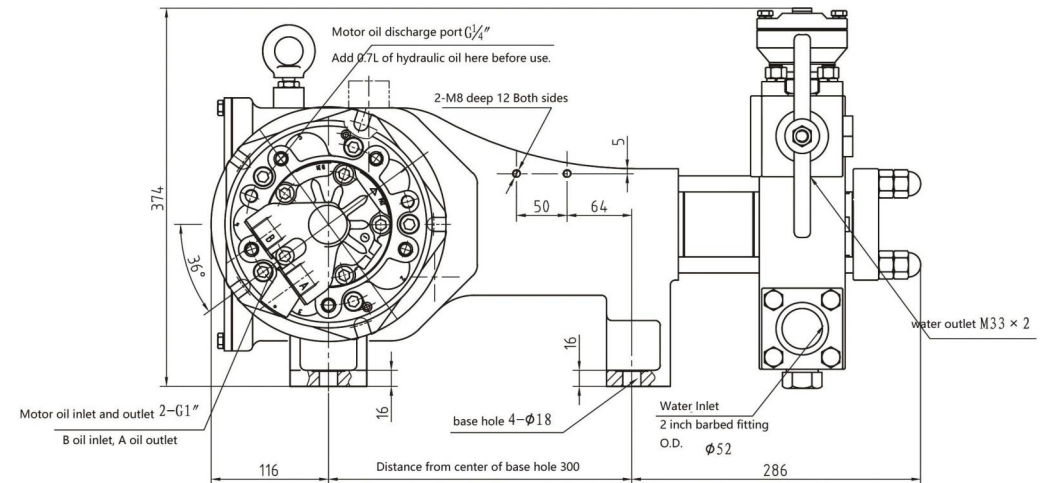

BW-160 (Hydraulic Motor Driven)




The BW-160 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump that is driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of around 15 tons, but can also be used for other purposes such as grouting, mine wastewater discharge, and long-distance water conveyance. The pump has four flow rates and four pressures, with a wide range of flow and pressure changes that can be applied to different drill hole diameters. In terms of design, new concepts, new structures, new materials, and new processes are used. The pump is compact, lightweight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are designed to be standardized and universal, making installation and maintenance convenient. The service life of vulnerable parts is long, and the reliability is high.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	70			
Cylinder diameter (mm)	70			
Flow (L/min)	160	107	67	44
Pressure (MPa)	2.7	4	6.5	10
Input speed (r/min)	540			
Input power (KW)	9			
Dimensions (mm)	785 × 788 × 708			
Weight (kg)	290			
Hydraulic motor model	2K604-0041			
Hydraulic motor pressure (MPa)	17			
Maximum motor flow (L/min)	48			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-160 Outline Dimension Drawing

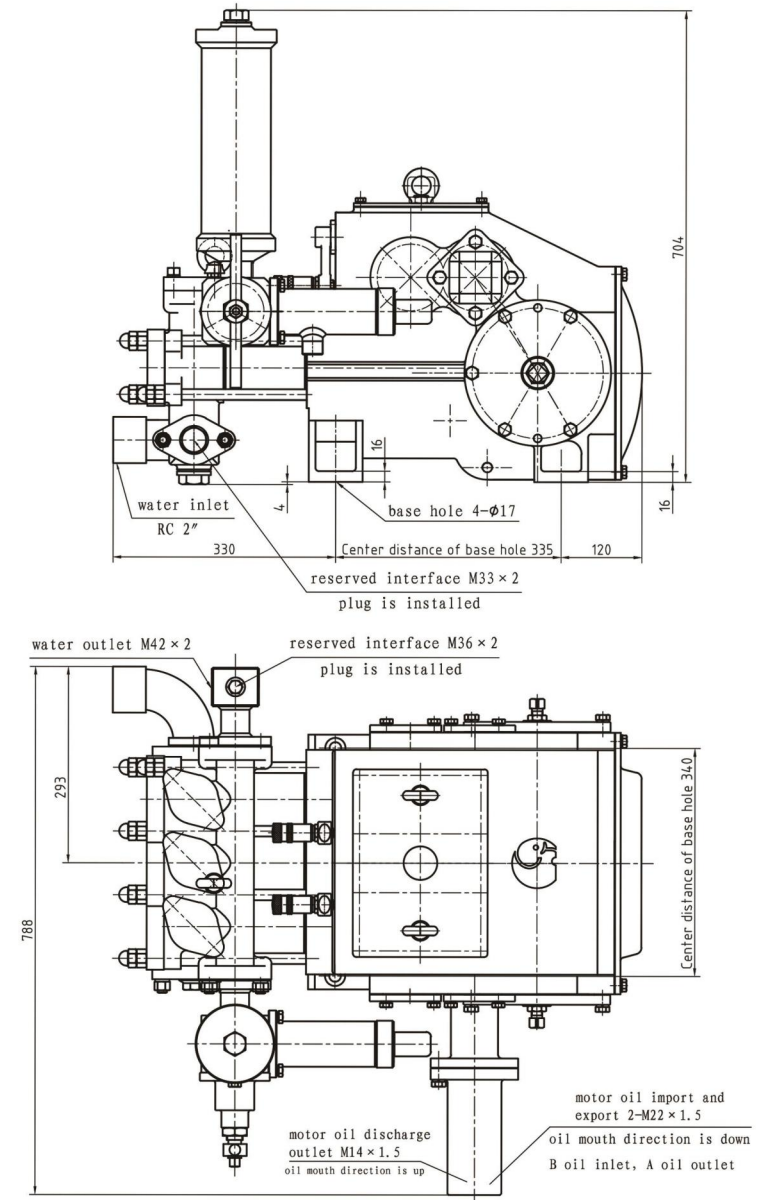

BW-180 (Hydraulic Motor Driven)

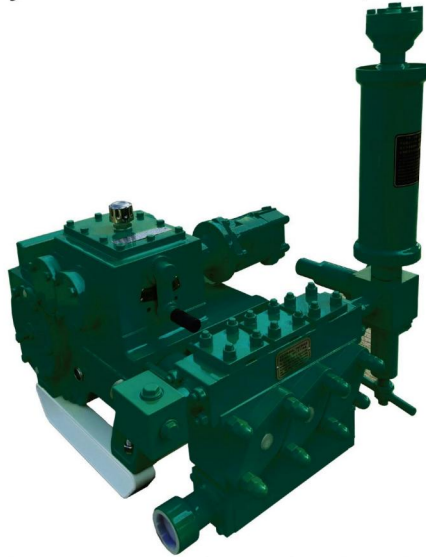


The BW-180 reciprocating pump is a horizontal, triplex, reciprocating, single-acting piston pump that is driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines weighing around 18 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has two flow rates and two pressures, with a wide range of flow and pressure changes and can be adapted to different hole diameters for drilling and backwashing. In the design, new concepts, new structures, new materials and new processes are used, which make the pump compact in structure, lightweight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head and related parts are as standardized and universal as possible, making installation and maintenance convenient. The service life of vulnerable parts is long, and the reliability is high.

Horizontal triplex reciprocating single acting piston pump		
Stroke (mm)	60	
Cylinder diameter (mm)	70	
Flow (L/min)	180	71
Pressure (MPa)	3.2	8
Input speed (r/min)	640	
Input power (KW)	12	
Dimensions (mm)	773×680×778	
Weight (kg)	252	
Hydraulic motor model	2K604-0041	
Hydraulic motor pressure (MPa)	17	
Maximum motor flow (L/min)	56	

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-180 Outline Dimension Drawing

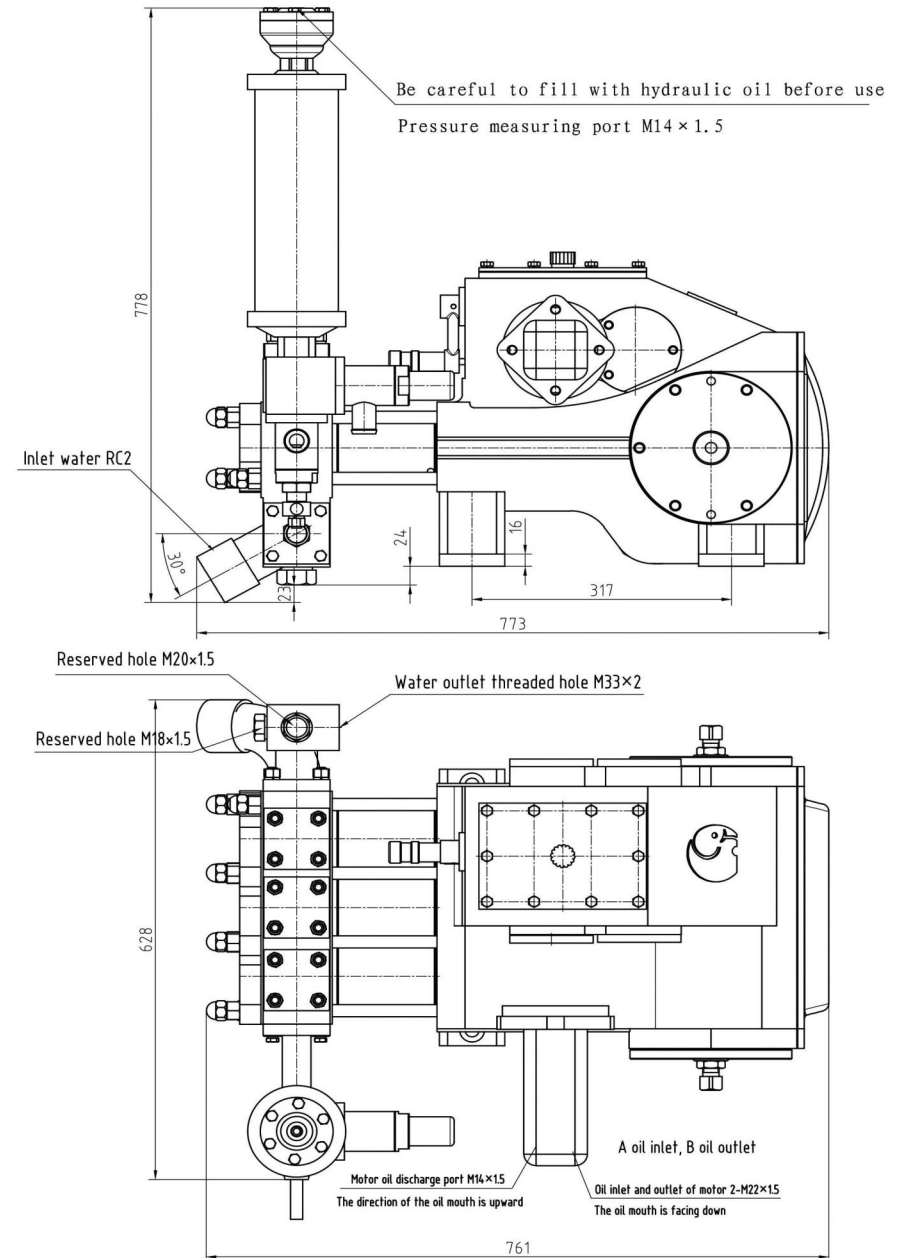

BWF-250 (Hydraulic Motor Driven)




The BWF-250 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a hydraulic motor. It is mainly used in conjunction with excavators of about 25 tons for non-excavation drilling, and can also be used for other applications such as grouting, mining drainage, and long-distance water delivery. The pump has four flow rates and four pressures, with a wide range of flow and pressure changes, making it suitable for different diameters of drilling and backfilling. The design adopts new concepts, new structures, new materials, and new processes and is compact, lightweight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are as standardized and universal as possible to facilitate installation and maintenance. The service life of wearing parts is long, and reliability is high.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	70			
Cylinder diameter (mm)	75			
Flow (L/min)	250	158	100	69
Pressure (MPa)	2.5	4	6	9
Input speed (r/min)	727			
Input power (KW)	14			
Dimensions (mm)	815×804×890			
Weight (kg)	290			
Hydraulic motor model	2K604-0041			
Hydraulic motor pressure (MPa)	17			
Maximum motor flow (L/min)	64			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BWF-250 Outline Dimension Drawing

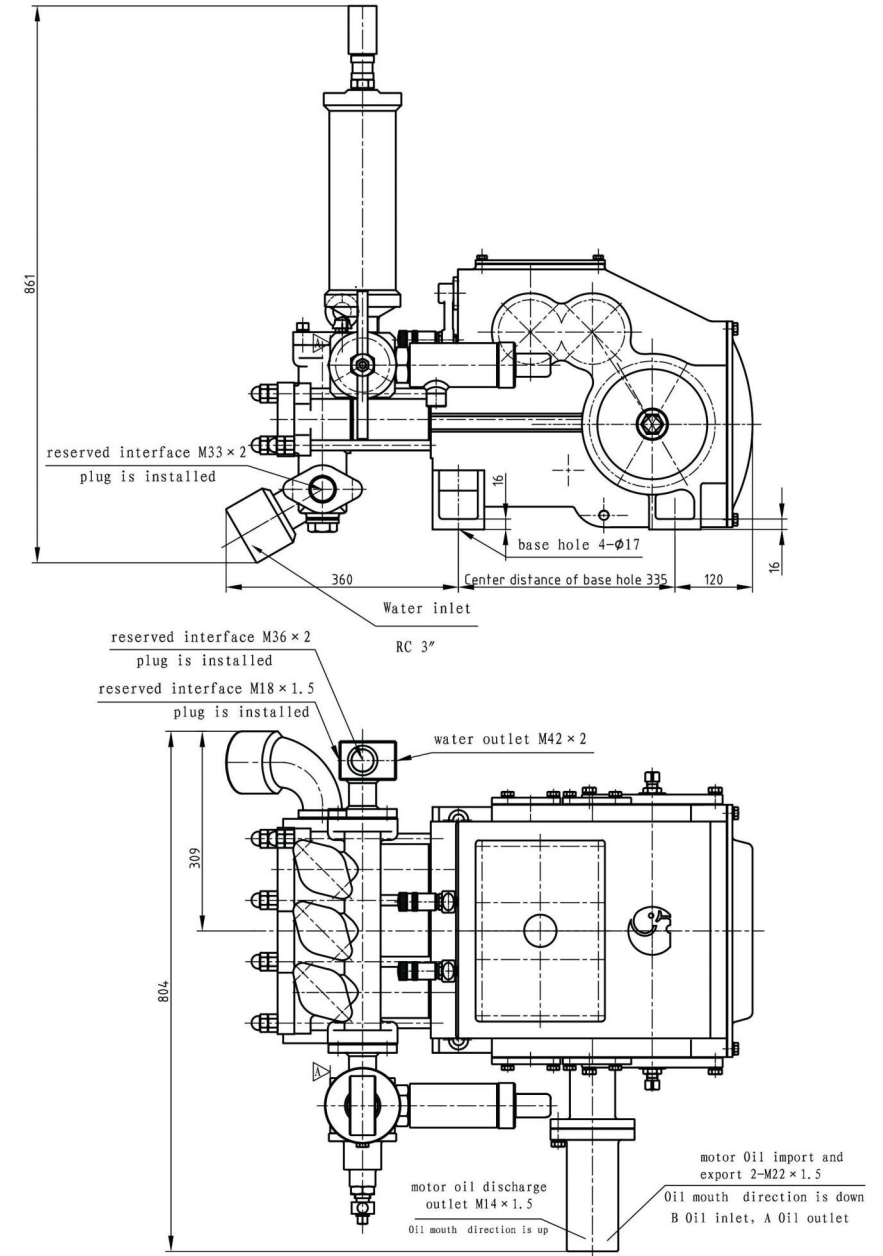

BW-320 (Hydraulic Motor Driven)


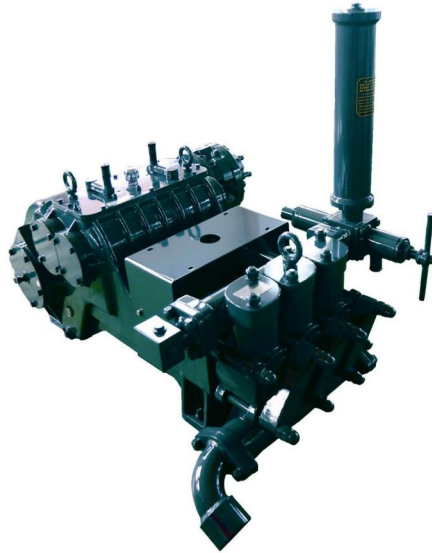


The BW-320 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump, driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drill rigs of around 35 tons, as well as for other purposes such as grouting, mine drainage, and long-distance water transport. This pump has four types of flow rates and four types of pressures, with a wide range of flow rate and pressure changes, making it suitable for different borehole diameters for drilling and backfilling. The design adopts new concepts, new structures, new materials, and new processes. The structure is compact, lightweight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are standardized and universalized as much as possible for easy installation and maintenance. The service life of vulnerable parts is long, with high reliability.

Horizontal triplex reciprocating single acting plunger pump				
Stroke (mm)	110			
Cylinder diameter (mm)	80			
Flow (L/min)	320	230	165	118
Pressure (MPa)	4	5	6	8
Input speed (r/min)	535			
Input power (KW)	30			
Dimensions (mm)	1265 × 941 × 1026			
Weight (kg)	640			
Hydraulic motor model	1-175			
Hydraulic motor pressure (MPa)	20			
Maximum motor flow (L/min)	102			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-320 Outline Dimension Drawing

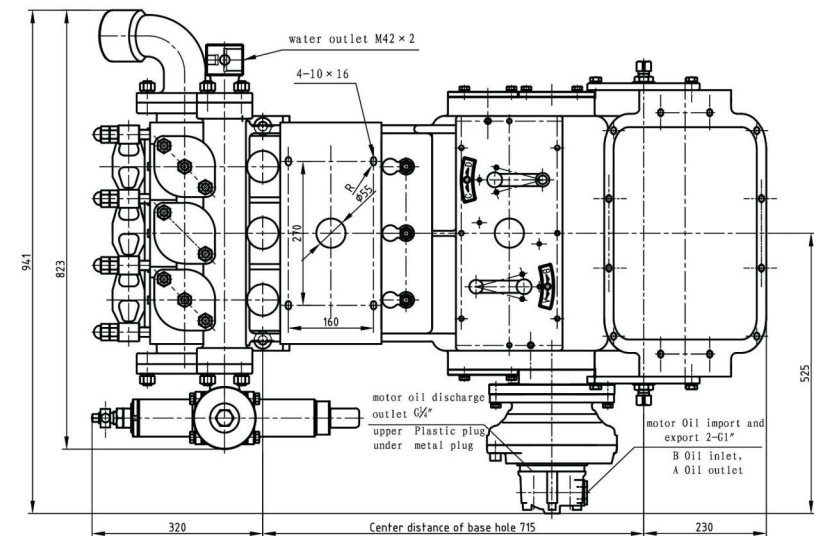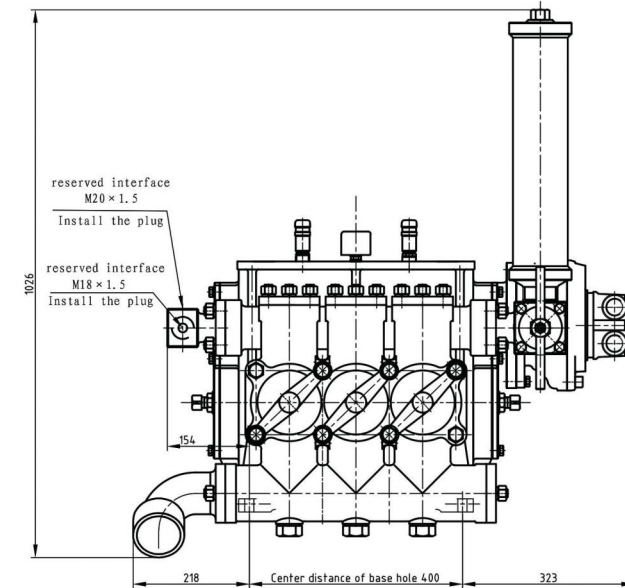

BWF-320




The BWF-320 reciprocating pump is a horizontal triplex single-acting piston pump driven by a hydraulic motor. It is primarily designed for use with trenchless drilling rigs of around 35 tons, and can also be applied in grouting, mine dewatering, and long-distance water supply applications. The pump offers four flow settings and four pressure settings, providing a wide range of flow and pressure variations to suit different borehole diameters and pullback operations. The design incorporates new concepts, structures, materials, and processes, resulting in a compact, lightweight, and aesthetically pleasing unit. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are designed with high series and interchangeability for easy installation and maintenance. It features long wearing part life and high reliability.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	75			
Cylinder Diameter (mm)	85			
Flow Rate (L/min)	320	206	151	98
Pressure (MPa)	2.5	3.9	5.2	8
Input Speed (r/min)	515			
Input Power (kW)	16			
Dimensions (mm)	1022×819×933			
Weight (kg)	430			
Hydraulic Motor Model	LM1-150			
Hydraulic Motor Pressure (MPa)	20			
Max. Motor Flow Rate (L/min)	95			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BWF-320 Outline Dimension Drawing

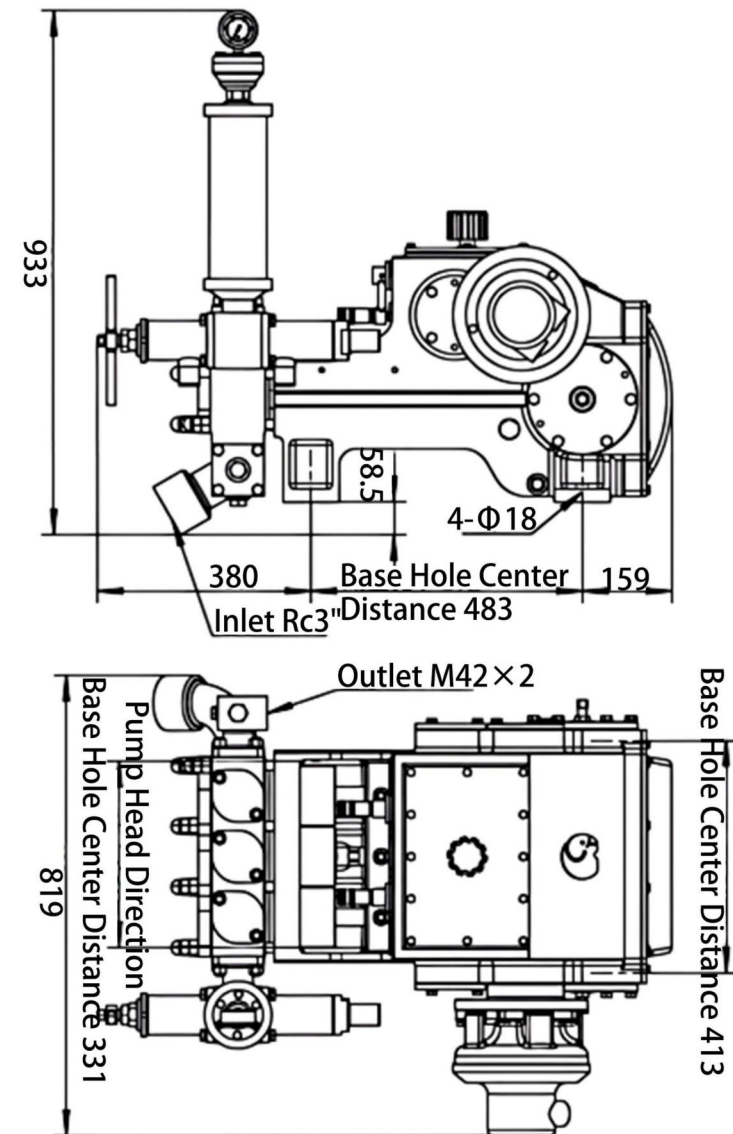

BW-400 (Hydraulic Motor Driven)


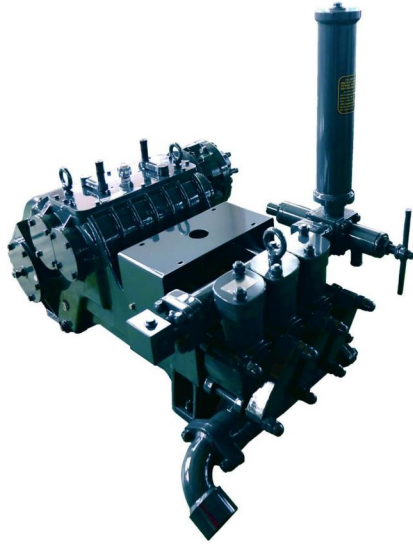


The BW-400 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump that is driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of around 40 tons, and can also be used for grouting, mine drainage and long-distance water delivery in other applications. The pump has four flow rates and four pressures, with a wide range of changes in flow rate and pressure to suit different borehole sizes and backflushing. The design incorporates new concepts and utilizes new structures, materials, and processes. It is compact in structure, light in weight, small in size, and aesthetically pleasing. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are designed to be as standardized and interchangeable as possible, making installation and maintenance easy. The service life of vulnerable parts is long and its reliability is high.


Horizontal triplex reciprocating single acting plunger pump				
Stroke (mm)	110			
Cylinder diameter (mm)	85			
Flow (L/min)	400	290	200	150
Pressure (MPa)	3	4.5	6	10
Input speed (r/min)	538			
Input power (KW)	35			
Dimensions (mm)	1265 × 941 × 1026			
Weight (kg)	650			
Hydraulic motor model	1-175			
Hydraulic motor pressure (MPa)	20			
Maximum motor flow (L/min)	105			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-400 Outline Dimension Drawing

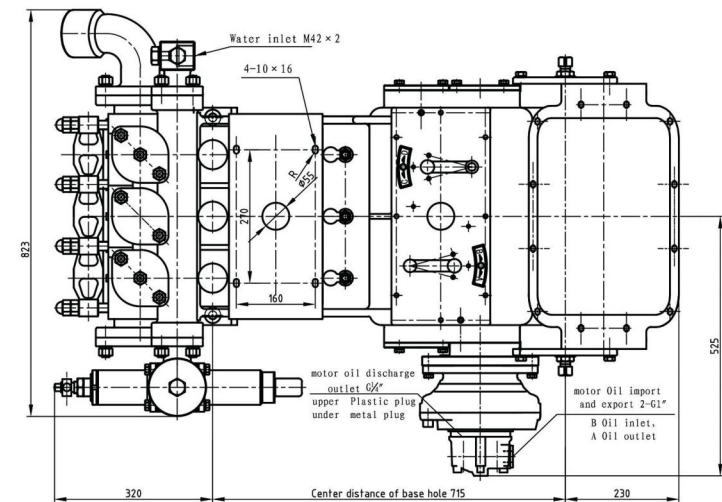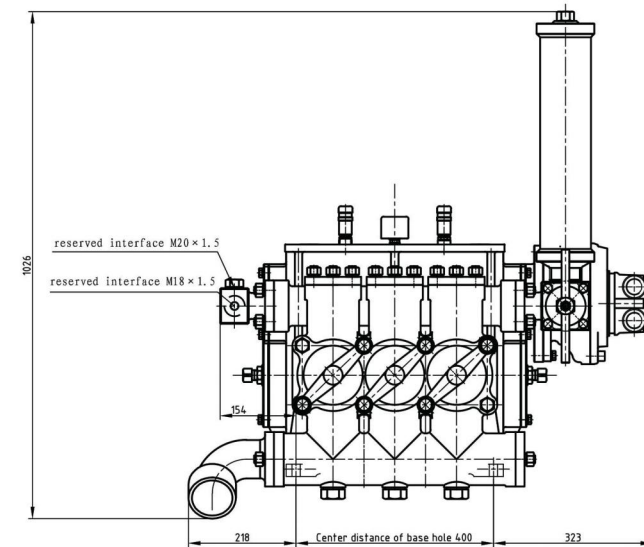

BWF-400 (Hydraulic Motor Driven)


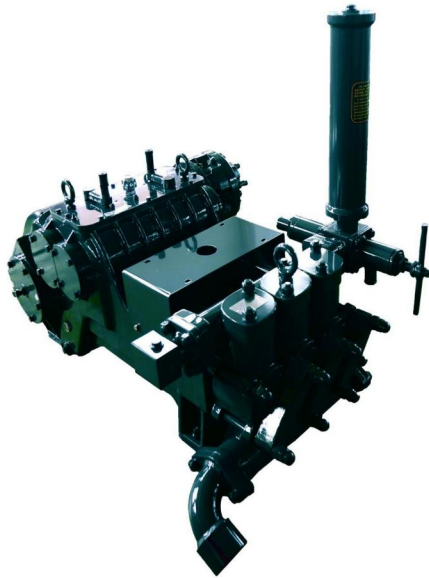


The BWF-400 reciprocating pump is a horizontal triplex reciprocating single-acting plunger pump driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of around 40 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four flow rates and four pressures, with a large range of flow rate and pressure changes, making it suitable for different drill hole diameters and backflushing. The design adopts new concepts, new structures, new materials, and new processes, with a compact structure, light weight, small size, and beautiful appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are as standardized and universalized as possible for convenient installation and maintenance. The service life of vulnerable parts is long, and the reliability is high.


Horizontal triplex reciprocating single acting plunger pump				
Stroke (mm)	110			
Cylinder diameter (mm)	85			
Flow (L/min)	400	242	154	93
Pressure (MPa)	2.3	3.8	6	10
Input speed (r/min)	515			
Input power (KW)	30			
Dimensions (mm)	1265×941×1026			
Weight (kg)	650			
Hydraulic motor model	1-150			
Hydraulic motor pressure (MPa)	20			
Maximum motor flow (L/min)	95			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BWF-400 Outline Dimension Drawing

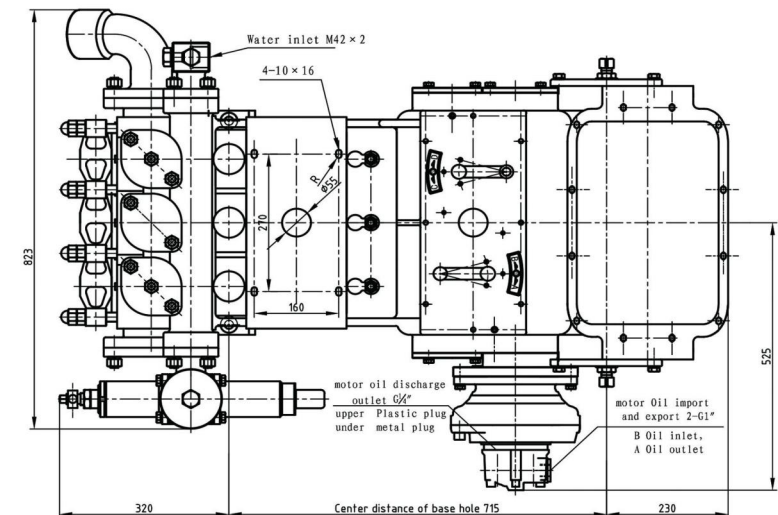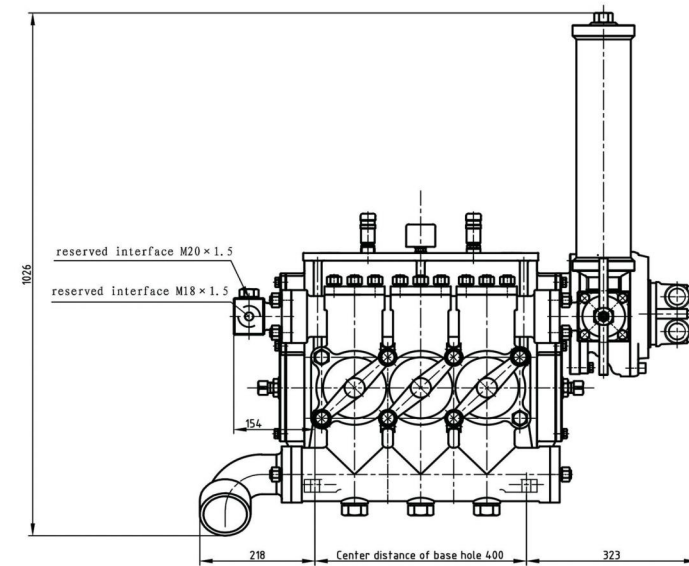

BW-450 (Hydraulic Motor Driven)

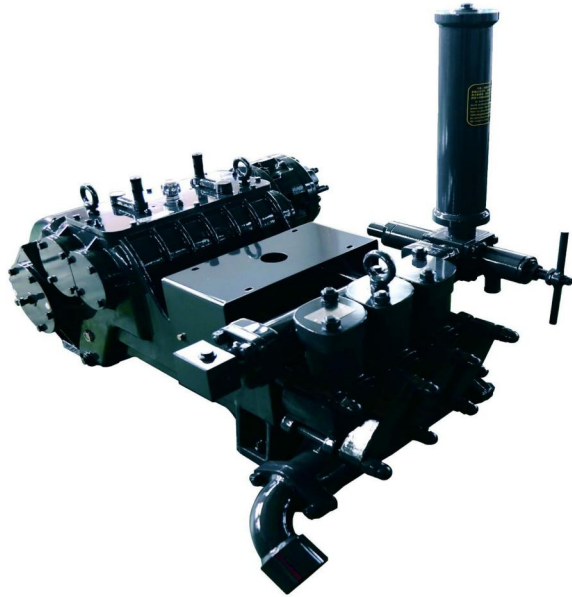



The BW-450 mud pump is a horizontal triplex reciprocating single-acting piston pump, driven by a hydraulic motor. It is mainly used with non-excavation drilling rigs of around 45 tons, but can also be used for grouting, mine drainage, and long-distance water transport. The pump has four flow rates and four pressures, with a wide range of variations to suit different hole diameters for drilling and backpulling. The design incorporates new concepts, materials, and processes, with a compact structure, lightweight, small size, and attractive appearance. The pump body, crankshaft, connecting rod, crosshead, pump head, and related parts are standardized and universal, making installation and maintenance convenient. The vulnerable parts have a long service life and high reliability.

Horizontal triplex reciprocating single acting piston pump


Stroke (mm)	110			
Cylinder diameter (mm)	95			
Flow (L/min)	450	320	230	165
Pressure (MPa)	3.5	4.5	6	8
Input speed (r/min)	508			
Input power (KW)	36			
Dimensions (mm)	1265×879×1026			
Weight (kg)	640			
Hydraulic motor model	1-200			
Hydraulic motor pressure (MPa)	20			
Maximum motor flow (L/min)	112			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-450 Outline Dimension Drawing

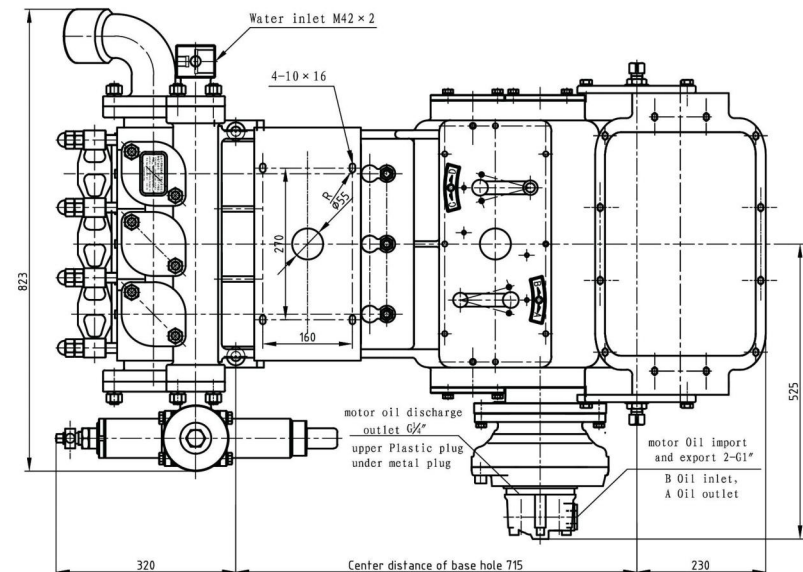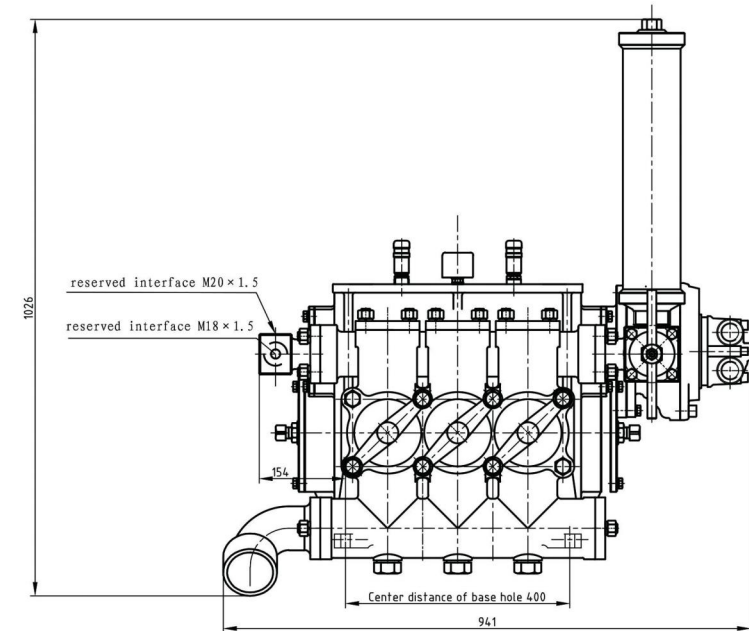

BWF-450

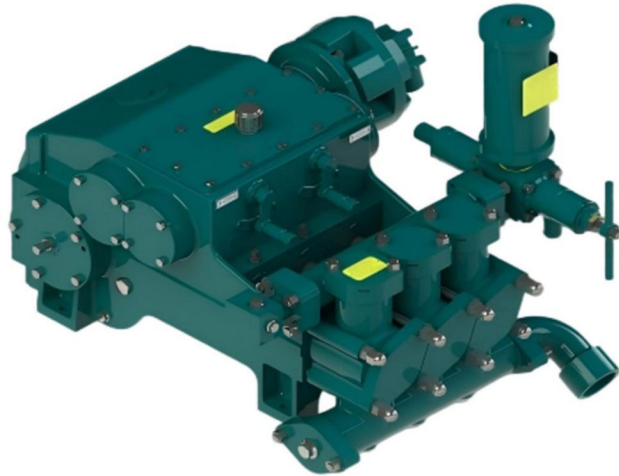


The BWF-450 reciprocating pump is a horizontal triplex single-acting piston pump driven by a hydraulic motor. It is primarily designed for use with trenchless drilling rigs of around 45 tons, and can also be applied in grouting, mine dewatering, and long-distance water supply applications. The pump offers four flow settings and four pressure settings, providing a wide range of flow and pressure variations to suit different borehole diameters and pullback operations. The design incorporates new concepts, structures, materials, and processes, resulting in a compact, lightweight, and aesthetically pleasing unit. The pump body, crankshaft, connecting rod, crosshead, pump head, and related components are designed with high series and interchangeability for easy installation and maintenance. It features long wearing part life and high reliability.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	80			
Cylinder Diameter (mm)	100			
Flow Rate (L/min)	450	343	213	164
Pressure (MPa)	3	4	6	8
Input Speed (r/min)	538			
Input Power (kW)	28			
Dimensions (mm)	1024×879×830			
Weight (kg)	550			
Hydraulic Motor Model	LM1-150			
Hydraulic Motor Pressure (MPa)	21			
Max. Motor Flow Rate (L/min)	87			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BWF-450 Outline Dimension Drawing

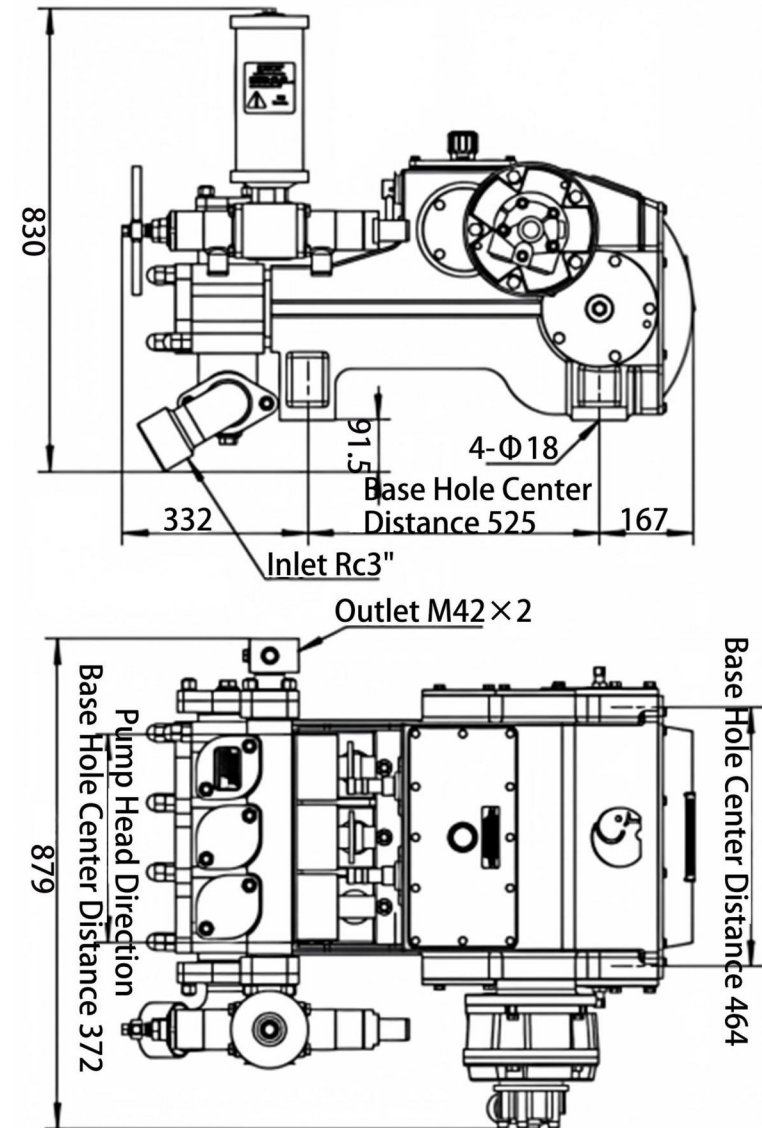

BW-600 (Hydraulic Motor Driven)


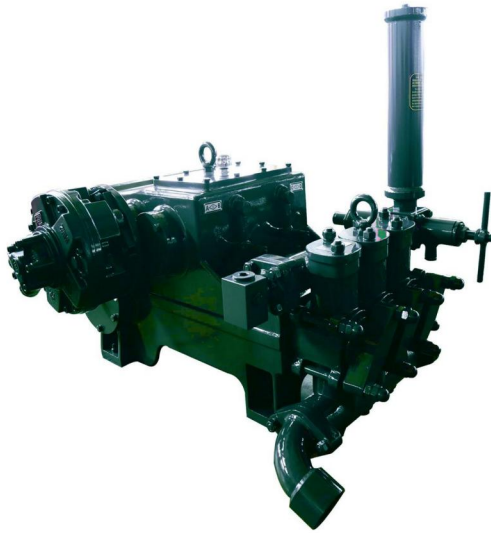


The BW-600 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, which is driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling rigs of about 70 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four different flow rates and four different pressures, with a wide range of flow and pressure changes, suitable for different borehole drilling and backfilling. The design incorporates new concepts, new structures, new materials, and new processes, with a compact structure, light weight, small size, and attractive appearance. It is easy to install and maintain, and features high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	110			
Cylinder diameter (mm)	100			
Flow (L/min)	600	415	280	195
Pressure (MPa)	3.5	5	7.5	10
Input speed (r/min)	550			
Input power (KW)	47			
Dimensions (mm)	1222 × 823 × 1026			
Weight (kg)	760			
Hydraulic motor model	2-250			
Hydraulic motor pressure (MPa)	20			
Maximum motor flow (L/min)	152			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-600 Outline Dimension Drawing

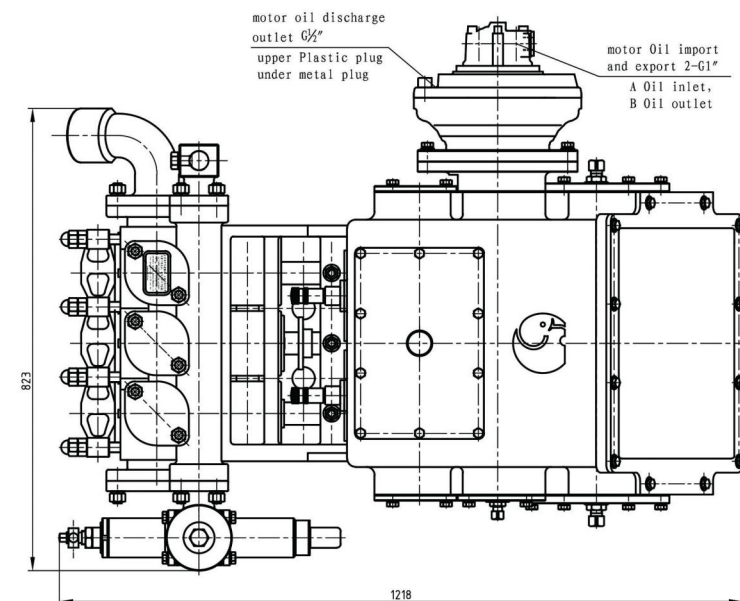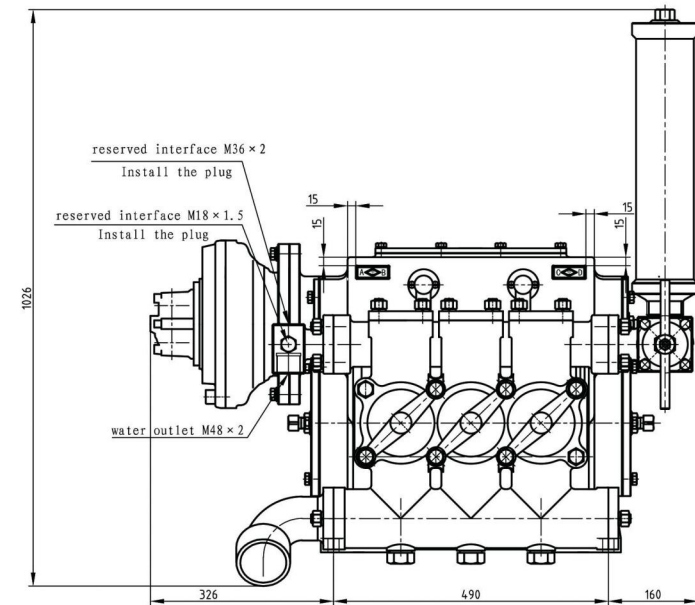

BW-800 (Hydraulic Motor Driven)


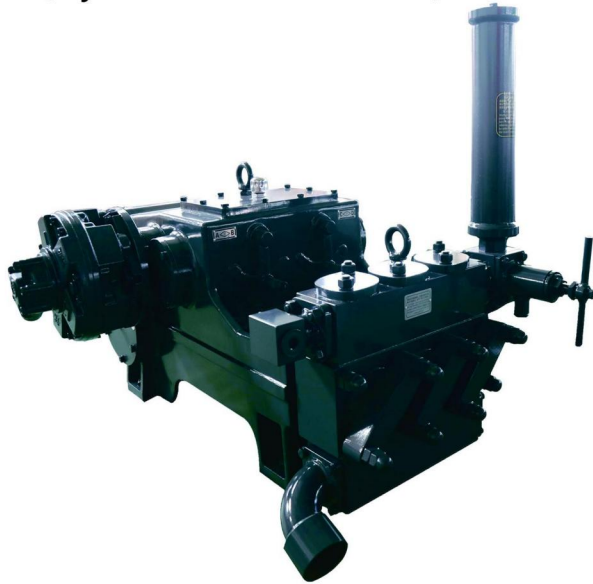


The BW-800 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump, driven by a hydraulic motor. It is mainly used in conjunction with non-excavating drilling machines weighing around 90 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four flow rates and four pressure levels, with a large range of flow and pressure changes, making it suitable for different aperture drilling and backstroke. In terms of design, new concepts, new structures, new materials, and new processes are adopted; the structure is compact, light in weight, small in size, and aesthetically pleasing; installation and maintenance are convenient; and it has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.


Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	135			
Cylinder diameter (mm)	110			
Flow (L/min)	800	550	370	260
Pressure (MPa)	3.5	5	7.5	10
Input speed (r/min)	503			
Input power (KW)	54			
Dimensions (mm)	1339×948×1019			
Weight (kg)	950			
Hydraulic motor model	2-350			
Hydraulic motor pressure (MPa)	20			
Maximum motor flow (L/min)	195			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-800 Outline Dimension Drawing

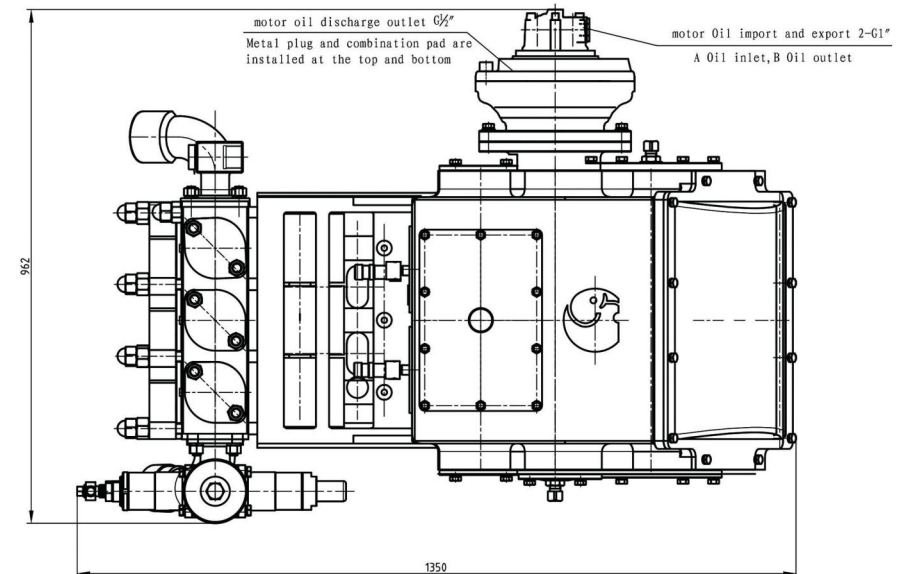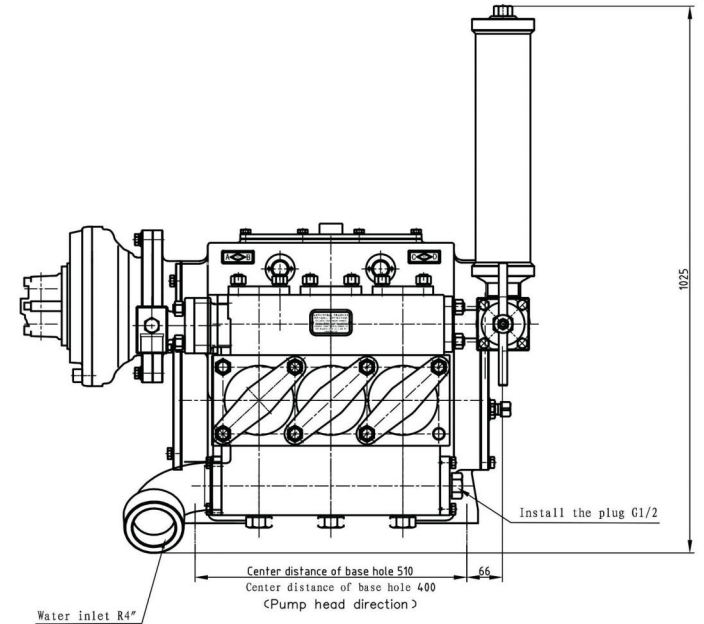

BW-1000 (Hydraulic Motor Driven)

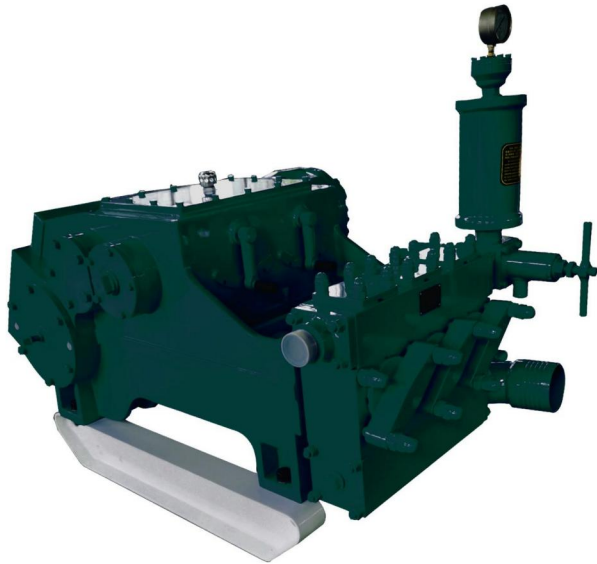


The BW-1000 reciprocating pump is a horizontal, triplex, single-acting piston pump that is hydraulically driven. It is mainly used in conjunction with non-excavation drilling machines weighing around 100 tons, but can also be used for grouting, mine drainage, and long-distance water transportation, among other purposes. The pump has four flow rates and four pressures, with a large range of flow rate and pressure variations to accommodate different borehole drilling and backflow requirements. The design incorporates new concepts, structures, materials, and technologies, with a compact structure, light weight, small size, and attractive appearance. It is easy to install and maintain, and features high output pressure, longer life expectancy of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	140			
Cylinder diameter (mm)	115			
Flow (L/min)	1000	650	515	335
Pressure (MPa)	4	6	7.5	10
Input speed (r/min)	475			
Input power (KW)	80			
Dimensions (mm)	1477×1004×1003			
Weight (kg)	1300			
Hydraulic motor model	2-420			
Hydraulic motor pressure (MPa)	25			
Maximum motor flow (L/min)	222			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

BW-1000 Outline Dimension Drawing

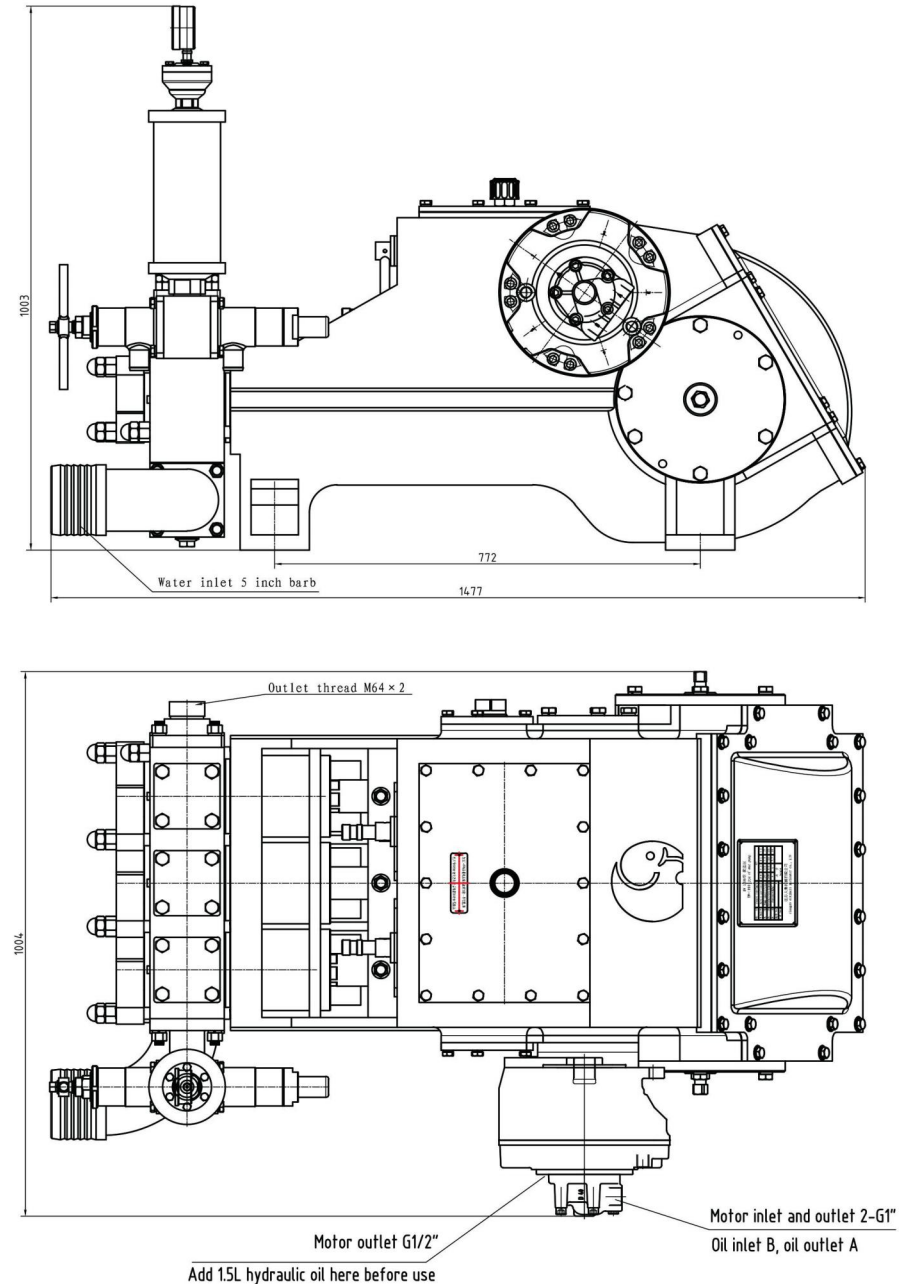

YBW-1200 (Hydraulic Motor Driven)



The YBW-1200 reciprocating pump is a horizontal triplex reciprocating single-acting piston pump driven by a hydraulic motor. It is mainly used in conjunction with non-excavation drilling machines of about 150 tons, and can also be used for other purposes such as grouting, mine drainage, and long-distance water delivery. The pump has four flow rates and four pressures, and its flow and pressure range can be adjusted to suit different diameters of drilling and backflow. In terms of design, new concepts, structures, materials, and processes are adopted. The pump has a compact structure, light weight, small size, and beautiful appearance. It is easy to install and maintain, and has the characteristics of high output pressure, long service life of vulnerable parts, and stable performance.

Horizontal triplex reciprocating single acting piston pump				
Stroke (mm)	150			
Cylinder diameter (mm)	125			
Flow (L/min)	1200	779	600	385
Pressure (MPa)	4	6	8	10
Input speed (r/min)	480			
Input power (KW)	100			
Dimensions (mm)	1596×1170×1242			
Weight (kg)	1700			
Hydraulic motor model	2-500			
Hydraulic motor pressure (MPa)	25			
Maximum motor flow (L/min)	260			

The product specifications and images provided may change due to design improvements and upgrades. Please feel free to inquire for more information.

YBW-1200 Outline Dimension Drawing

